

APPENDIX 3. CURRENT CODE POLICY

3 NOTTAGE TCE MEDINDIE SA 5081

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Local Variation (TNV)

Maximum Building Height (Metres) (Maximum building height is 9m)

Minimum Frontage (Minimum frontage for a detached dwelling is 15m)

Minimum Site Area (o_o_Minimum site area for a detached dwelling is 500 sqm)

Maximum Building Height (Levels) (Maximum building height is 2 levels)

Minimum Side Boundary Setback (Minimum side boundary setback is 1.5m for the first building level; 3m for any second building level or higher)

Overlav

Aircraft Noise Exposure (ANEF 20)

Airport Building Heights (Regulated) (All structures over 45 metres)

Advertising Near Signalised Intersections

Future Road Widening

Historic Area (Walk2)

Hazards (Flooding - Evidence Required)

Major Urban Transport Routes

Prescribed Wells Area

Regulated and Significant Tree

Stormwater Management

Traffic Generating Development

Urban Tree Canopy

Zone

Established Neighbourhood

Development Pathways

■ Established Neighbourhood

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Air handling unit, air conditioning system or exhaust fan
- · Brush fence
- · Building work on railway land
- · Internal building work
- Partial demolition of a building or structure
- Solar photovoltaic panels (roof mounted)
- Water tank (above ground)
- Water tank (underground)

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development

Page 1 of 124 Printed on 12/07/2021

controls in the Code.

- · Ancillary accommodation
- Carport
- Dwelling addition
- Outbuilding
- · Replacement building
- Temporary accommodation in an area affected by bushfire
- Verandah

3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

- · Ancillary accommodation
- Carport
- Demolition
- · Detached dwelling
- Dwelling addition
- Fence
- Group dwelling
- Land division
- Outbuilding
- · Residential flat building
- · Retaining wall
- Row dwelling
- · Semi-detached dwelling
- Tree-damaging activity
- Verandah

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

Established Neighbourhood Zone

Assessment Provisions (AP)

	Desired Outcome
DO 1	A neighbourhood that includes a range of housing types, with new buildings sympathetic to the predominant built form character and development patterns.
DO 2	Maintain the predominant streetscape character, having regard to key features such as roadside plantings, footpaths, front yards, and space between crossovers.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
PO 1.1 Predominantly residential development with complementary non-residential activities compatible with the established development pattern of the neighbourhood.	DTS/DPF 1.1 Development comprises one or more of the following: (a) Ancillary accommodation (b) Community facility (c) Consulting room (d) Dwelling (e) Office (f) Recreation area

Page 2 of 124 Printed on 12/07/2021

	(g) Shop.		
P0 1.2	DTS/DPF 1.2		
Commercial activities improve community access to services are of a scale and type to maintain residential amenity.	A shop, consulting room or office (or any combination thereof) satisfies any one of the following:		
	 (a) it is located on the same allotment and in conjunction with a dwelling where all the following are satisfied: (i) does not exceed 30% of the total floor area of the associated dwelling (excluding any garage or carport) of 50m² gross leasable floor area, whichever is the lesser (ii) does not involve the display of goods in a window or about the dwelling or its curtilage (b) it reinstates a former shop, consulting room or office in an existing building (or portion of a building) and satisfies one of the following: (i) the building is a State or Local Heritage Place (ii) is in conjunction with a dwelling and there is no increase in the gross leasable floor area previously used for non residential purposes (c) is located more than 500m from an Activity Centre and satisfies one of the following: (i) does not exceed 100m² gross leasable floor area (individually or combined, in a single building) where the site does not have a frontage to a State Maintained Road (d) the development site abuts an Activity Centre and all the following are satisfied: (i) it does not exceed 200m² gross leasable floor area (individually or combined, in a single building) where the site has a frontage to a State Maintained Road 		
	 the proposed development will not result in a combined gross leasable floor area (existing and proposed) of all shops, consulting rooms and offices that abut the Activity Centre in this zone exceeding the lesser of the following: A. 50% of the existing gross leasable floor area within the Activity Centre 		
	B. 1000m ² .		
2012	DT0/DDF 1 0		
Po 1.3 Non-residential development sited and designed to complement the residential character and amenity of the neighbourhood.	None are applicable.		
P0 1.4	DTS/DPF 1.4		
Non-residential development located and designed to improve community accessibility to services, primarily in the form of:	, None are applicable.		
(a) small scale commercial uses such as offices, shops and consulting rooms			
(b) community services such as educational establishments, community centres, places of worship, pre-schools, childcare and other health and welfare services			
(c) services and facilities ancillary to the function or operation of supported accommodation or retirement facilities (d) open space and recreation facilities.			
201.5	DTS/DPF 1.5		

Page 3 of 124 Printed on 12/07/2021

complements the scale of development envisaged by the desired outcome for the neighbourhood.

- (a) set back at least 3m from any boundary shared with a residential land use
- (b) building height not exceeding 1 building level
- (c) the total floor area of the building not exceeding 150% of the total floor area prior to the addition/alteration
- (d) off-street vehicular parking exists or will be provided in accordance with the rate(s) specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number.

Site Dimensions and Land Division

PO 2 1

Allotments/sites for residential purposes are of suitable size and dimension to accommodate the anticipated dwelling form and are compatible with the prevailing development pattern in the locality.

DTS/DPF 2.1

Development will not result in more than 1 dwelling on an existing allotment

or

Development involves the conversion of an existing dwelling into two or more dwellings and the existing dwelling retains its original external appearance to the public road

or

Allotments/sites for residential purposes accord with the following:

(a) site areas (or allotment areas in the case of land division) are not less than the following (average site area per dwelling, including common areas, applies for group dwellings or dwellings within a residential flat building):

Minimum Site Area

Minimum site area for a detached dwelling is 500 sqm

and

(b) site frontages (or allotment frontages in the case of land division) are not less than:

Minimum Frontage

Minimum frontage for a detached dwelling is 15m

In relation to DTS/DPF 2.1, in instances where:

- (c) more than one value is returned in the same field, refer to the Minimum Frontage Technical and Numeric Variation layer or Minimum Site Area Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development
- (d) no value is returned in (a) or (b) (i.e. there is a blank field or the relevant dwelling type is not listed), then none are applicable and the relevant development cannot be classified as deemed-tosatisfy.

P0 2 2

Development creating new allotments/sites in conjunction with retention of an existing dwelling ensures the site of the existing dwelling remains fit for purpose.

DTS/DPF 2.2

Where the site of a dwelling does not comprise an entire allotment:

- (a) the balance of the allotment accords with the requirements specified in Established Neighbourhood Zone DTS/DPF 2.1, with 10% reduction in minimum site area where located in a Character Area Overlay or Historic Area Overlay
- (b) if there is an existing dwelling on the allotment that will remain on the allotment after completion of the development it will not contravene:
 - (i) private open space requirements specified in Design in Urban Areas Table 1 - Private Open Space
 - (ii) car parking requirements specified in Transport, Access and Parking Table 1 General Off-Street Car Parking

Page 4 of 124 Printed on 12/07/2021

Policy24 - Enquiry Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole Site coverage PO 3.1 DTS/DPF 3.1 Building footprints are consistent with the character and pattern of the Development does not result in site coverage exceeding: neighbourhood and provide sufficient space around buildings to limit In instances where: visual impact, provide an attractive outlook and access to light and ventilation. (a) no value is returned (i.e. there is a blank field), then a maximum 50% site coverage applies (b) more than one value is returned in the same field, refer to the Site Coverage Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development. **Building Height** PO 4.1 DTS/DPF 4.1 Buildings contribute to the prevailing character of the neighbourhood and Building height (excluding garages, carports and outbuildings) is no complements the height of nearby buildings. greater than: the following: **Maximum Building Height (Metres)** Maximum building height is 9m **Maximum Building Height (Levels)** Maximum building height is 2 levels in all other cases (i.e. there are blank fields for both maximum building height (metres) and maximum building height (levels)) - 2 building levels up to a height of 9m. In relation to DTS/DPF 4.1, in instances where: more than one value is returned in the same field, refer to the Maximum Building Height (Levels) Technical and Numeric Variation layer or Maximum Building Height (Meters) Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development. (d) only one value is returned for DTS/DPF 4.1(a) (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other. PO 4.2 DTS/DPF 4.2 Additions and alterations do not adversely impact on the streetscape Additions and alterations: character are fully contained within the roof space of a building with no external alterations made to the building elevation facing the primary street (b) meet all of the following:

- do not include any development forward of the front façade building line
- (ii) where including a second or subsequent building level addition, does not project beyond a 45 degree angle measured from ground level at the building line of the existing building.

Primary Street Setback

PO 5.1

DTS/DPF 5.1

Buildings are set back from primary street boundaries consistent with the existing streetscape.

The building line of a building is set back from the primary street boundary:

Page 5 of 124 Printed on 12/07/2021

- (a) at least the average setback to the building line of existing buildings on adjoining sites which face the same primary street (including those buildings that would adjoin the site if not separated by a public road or a vacant allotment)
- (b) where there is only one existing building on adjoining sites which face the same primary street (including those that would adjoin if not separated by a public road or a vacant allotment), not less than the setback to the building line of that building or
- (c) in all other cases, no DTS/DPF is applicable.

Secondary Street Setback

PO 6.1

Buildings are set back from secondary street boundaries (not being a rear laneway) to maintain the established pattern of separation between buildings and public streets and reinforce streetscape character.

DTS/DPF 6.1

Building walls are set back from the secondary street boundary (other than a rear laneway):

(a) no less than:

Minimum Side Boundary Setback

Minimum side boundary setback is 1.5m for the first building level; 3m for any second building level or higher

or

(b) 900mm, whichever is greater

or

(c) if a dwelling on any adjoining allotment is closer to the secondary street, the distance of that dwelling from the boundary with the secondary street.

In instances where no value is returned in DTS/DPF 6.1(a) (i.e. there is a blank field), then it is taken that the value for DTS/DPF 6.1(a) is zero.

Boundary Walls

PO 7.1

Dwelling boundary walls are limited in height and length to manage visual and overshadowing impacts on adjoining properties.

DTS/DPF 7.1

Dwellings do not incorporate side boundary walls where a side boundary setback value is returned in (a) below:

(a)

Minimum Side Boundary Setback

Minimum side boundary setback is 1.5m for the first building level; 3m for any second building level or higher

or

- (b) where no side boundary setback value is returned in (a) above, and except where the dwelling is located on a central site within a row dwelling or terrace arrangement, side boundary walls occur only on one side boundary and satisfy (i) or (ii) below:
 - side boundary walls adjoin or abut a boundary wall of a building on adjoining land for the same or lesser length and height
 - (ii) side boundary walls do not:
 - A. exceed 3.2m in height from the lower of the natural or finished ground level
 - B. exceed 8m in length
 - C. when combined with other walls on the boundary of the subject development site, exceed a maximum 45% of the length of the boundary
 - encroach within 3m of any other existing or proposed boundary walls on the subject land.

Page 6 of 124 Printed on 12/07/2021

Policy2	4 - Enquiry	1	
P0 7.2		DTS/DPF 7.2	
Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a low density suburban streetscape character.		Dwellings in a semi-detached, row or terrace arrangement are setback from side boundaries shared with allotments outside the development site at least the minimum distance identified in Established Neighbourhood Zone DTS/DPF 8.1.	
	Side Bound	dary Setback	
PO 8.1		DTS/DPF 8.1	
Buildin (a)	gs are set back from side boundaries to provide: separation between buildings in a way that complements the established character of the locality	Other than walls located on a side boundary in accordance with Established Neighbourhood Zone DTS/DPF 7.1, building walls are set backfrom the side boundary:	
(b)	access to natural light and ventilation for neighbours.	(a) no less than:	
		Minimum Side Boundary Setback	
		Minimum side boundary setback is 1.5m for the first building level; 3m for any second building level or higher	
		(b) in all other cases (i.e. there is a blank field), then: (i) at least 900mm where the wall is up to 3m (ii) other than for a south facing wall, at least 900mm plus 1/3 of the wall height above 3m (iii) at least 1.9m plus 1/3 of the wall height above 3m for south facing walls.	
	Rear Bound	dary Setback	
PO 9.1		DTS/DPF 9.1	
	gs are set back from rear boundaries to provide:	Other than in relation to an access lane way, buildings are set back from the rear boundary at least:	
(a)	separation between dwellings in a way that complements the established character of the locality	(a) 4m for the first building level	
(c) (b)	access to natural light and ventilation for neighbours private open space	(b) 6m for any second building level.	
(d)	space for landscaping and vegetation.		
	Арре	arance	
PO 10.1		DTS/DPF 10.1	
•	es and carports are designed and sited to be discrete and not ate the appearance of the associated dwelling when viewed from	Garages and carports facing a street (other than an access lane way):	
the stre	eet.	(a) are set back at least 0.5m behind the building line of the associated dwelling	
		(b) are set back at least 5.5m from the boundary of the primary street	
		(c) have a total garage door / opening width not exceeding 30% of the allotment or site frontage, to a maximum width of 7m.	
PO 10.2		DTS/DPF 10.2	
sympa	pearance of development as viewed from public roads is thetic to the wall height, roof forms and roof pitches of the ninant housing stock in the locality.	None are applicable.	
	Ancillary buildin	gs and structures	
PO 11.1		DTS/DPF 11.1	
	ntial ancillary buildings and structures are sited and designed to not t from the streetscape or appearance of buildings on the site or	Ancillary buildings and structures:	
	ouring properties.	(a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m ²	

Page 7 of 124 Printed on 12/07/2021

are constructed, added to or altered so that they are situated at

least

- 500mm behind the building line of the dwelling to which they are ancillary or
- 900mm from a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street has a total door/opening not exceeding 7m or 30% of the site frontage (whichever is the lesser) when facing a primary street or secondary street
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), a length not exceeding 8m unless:
 - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary not exceeding 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or abut the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level, and where located to the side of the associated dwelling, have a wall height or post height no higher than the wall height of the associated dwelling
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- if clad in sheet metal, are pre-colour treated or painted in a nonreflective colour.
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
- (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

the amount of existing soft landscaping prior to the development occurring.

PO 11.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.

DTS/DPF 11.2

Ancillary buildings and structures do not result in:

- (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space
- (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or

Page 8 of 124 Printed on 12/07/2021

	Table 2 - Off-Street Car Parking Requirements in Designated Areas.	
Advertisements		
PO 12.1	DTS/DPF 12.1	
Advertisements identify the associated business activity, and do not detract from the residential character of the locality.	Advertisements relating to a lawful business activity associated with a residential use do not exceed 0.3m2 and mounted flush with a wall or fence.	

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class of Development	Exceptions	
(Column A)	(Column B)	
 A kind of development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development. 	None specified.	
2. All development undertaken by: (a) the South Australian Housing Trust either individually or jointly with other persons or bodies or (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.	 residential flat building(s) of 3 or more building levels the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay. 	
3. Any development involving any of the following (or of any combination of any of the following): (a) air handling unit, air conditioning system or exhaust fan (b) ancillary accommodation (c) building work on railway land (d) carport (e) deck (f) dwelling (g) dwelling addition (h) fence (i) outbuilding (j) pergola (k) private bushfire shelter (l) residential flat building (m) retaining wall (n) shade sail (o) solar photovoltaic panels (roof mounted) (p) swimming pool or spa pool (q) verandah (r) water tank.	 exceeds the maximum building height specified in Established Neighbourhood Zone DTS/DPF 4.1 or involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 8m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3.2m measured from the lower of the natural or finished ground level (other than where the proposed wall abuts an existing wall or structure of greater height on the adjoining allotment). 	
4. Any development involving any of the following (or of any combination of any of the following): (a) consulting room (b) office (c) shop.	Except development that: 1. does not satisfy Established Neighbourhood Zone DTS/DPF 1.2 or 2. exceeds the maximum building height specified in Established Neighbourhood Zone DTS/DPF 4.1	

Page 9 of 124 Printed on 12/07/2021

	or
	involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primar street or secondary street) and:
	 (a) the length of the proposed wall (or structure) exceeds 8m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment)
	(b) the height of the proposed wall (or post height) exceed 3.2m measured from the lower of the natural or finished ground level (other than where the proposed wall abuts an existing wall or structure of greater height on the adjoining allotment).
Any of the following (or of any combination of any of the following):	None specified.
(a) internal building works	
(b) land division	
(c) recreation area	
(d) replacement building	
(e) temporary accommodation in an area affected by bushfire	
(f) tree damaging activity.	
6. Demolition.	Except any of the following:
	the demolition of a State or Local Heritage Place
	 the demolition of a building (except an ancillary building) in a Historic Area Overlay.
cement of Notices - Exemptions for Performance Assessed Develo	nment
	pment
ne specified.	

Part 3 - Overlays

None specified.

Advertising Near Signalised Intersections Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Provision of a safe road environment by reducing driver distraction at key points of conflict on the road.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Advertisements Near Signalised Intersections		
P0 1.1	DTS/DPF 1.1	

Page 10 of 124 Printed on 12/07/2021

Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.

Advertising:

- (a) is not illuminated
- (b) does not incorporate a moving or changing display or message
- (c) does not incorporate a flashing light(s).

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Advertisement or advertising hoarding that: (a) is within 100m of a: (i) signalised intersection or (ii) signalised pedestrian crossing and (b) will: (i) be internally illuminated or (ii) incorporate a moving or changing display or message or (iii) incorporate a flashing light.	Commissioner of Highways.	To provide expert technical assessment on potential risks relating to pedestrian and road safety which may arise from advertisements near intersections.	Development of a class to which Schedule 9 clause 3 item 21 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Aircraft Noise Exposure Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development sensitive to aircraft noise is designed and located to manage noise intrusion to reduce land use conflict and protect human health.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
P0 1.1	DTS/DPF 1.1
Buildings that accommodate activities sensitive to aircraft noise are designed and located to minimise aircraft noise intrusion and provide appropriate interior acoustic amenity.	Buildings accommodating sensitive receivers are not located within an area having an ANEF value of 30 or more.
Built Form	
PO 2.1	DTS/DPF 2.1
Additions to buildings involving the addition or extension of habitable rooms are designed and located to minimise aircraft noise intrusion and	Dwelling additions involving the addition or extension of habitable rooms:

Page 11 of 124 Printed on 12/07/2021

provide appropriate interior acoustic amenity.	 (a) do not result in an increase in the total floor area of the existing dwelling by greater than 50 percent (b) do not occur in areas having an ANEF value of 30 or more.
Land D	Division
P0 3.1 Land division does not increase the number of allotments used for sensitive receivers in areas adversely affected by aircraft noise to mitigate community exposure to potential adverse environmental and amenity impacts generated by aircraft movements.	DTS/DPF 3.1 Land division: (a) within an area having an ANEF value of less than 30 or (b) within an area having an ANEF value or 30 or more and: (i) does not result in any additional allotments or (ii) none of the allotments will accommodate a sensitive receiver.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Airport Building Heights (Regulated) Overlay

Assessment Provisions (AP)

Desired Outcome		
	Management of potential impacts of buildings and generated emissions to maintain operational and safety requirements of registered and certified commercial and military airfields, airports, airstrips and helicopter landing sites.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operation of a certified or registered aerodrome.	Buildings are located outside the area identified as 'All structures' (no height limit is prescribed) and do not exceed the height specified in the Airport Building Heights (Regulated) Overlay which applies to the subject site as shown on the SA Property and Planning Atlas. In instances where more than one value applies to the site, the lowest value relevant to the site of the proposed development is applicable.
PO 1.2	DTS/DPF 1.2
Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with a certified or registered aerodrome.	Development does not include exhaust stacks.

Procedural Matters (PM) - Referrals

Page 12 of 124 Printed on 12/07/2021

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development: building located in an area identified as 'All structures' (no height limit is prescribed) or will exceed the height specified in the Airport Building Heights (Regulated) Overlay building comprising exhaust stacks that generates plumes, or may cause plumes to be generated, above a height specified in the Airport Building Heights (Regulated) Overlay.	The airport-operator company for the relevant airport within the meaning of the Airports Act 1996 of the Commonwealth or, if there is no airport-operator company, the Secretary of the Minister responsible for the administration of the Airports Act 1996 of the Commonwealth.	To provide expert assessment and direction to the relevant authority on potential impacts on the safety and operation of aviation activities.	Development of a class to which Schedule 9 clause 3 item 1 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Future Road Widening Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development which is consistent with and will not compromise efficient delivery of future road widening requirements.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Future Roa	nd Widening
P0 1.1	DTS/DPF 1.1
Development does not compromise or is located and designed to minimise its impact on future road widening requirements.	Development does not involve building work, or building work is located wholly outside the land subject to the 6m Consent Area, the C Type Requirement or the Strip Requirement of the Metropolitan Adelaide Road Widening Plan.

Procedural Matters (PM)

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Other than where all deemed-to-satisfy criteria for all policies relevant to this referral are met, development (including the division of land) that is within or may encroach within a Future Road Widening Area.	Commissioner of Highways.	To provide expert technical assessment and direction to the relevant authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 4 of the Planning, Development and

Page 13 of 124 Printed on 12/07/2021

	Infrastructure (General) Regulations 2017 applies.
--	---

Hazards (Flooding - Evidence Required) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development adopts a precautionary approach to mitigate potential impacts on people, property, infrastructure and the environment
	from potential flood risk through the appropriate siting and design of development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Flood R	tesilience	
PO 1.1 Development is sited, designed and constructed to minimise the risk of entry of potential floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	DTS/DPF 1.1 Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished floor level at least 300mm above: (a) the highest point of top of kerb of the primary street or (b) the highest point of natural ground level at the primary street boundary where there is no kerb	
Environmental Protection		
PO 2.1	DTS/DPF 2.1	
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building.	Development does not involve the storage of hazardous materials.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Historic Area Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Historic themes and characteristics are reinforced through conservation and contextually responsive development, design and adaptive reuse that responds to existing coherent patterns of land division, site configuration, streetscapes, building siting and built scale, form and features as exhibited in the Historic Area and expressed in the Historic Area Statement.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 14 of 124 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All Deve	Plopment
P0 1.1	DTS/DPF 1.1
All development is undertaken having consideration to the historic streetscapes and built form as expressed in the Historic Area Statement.	None are applicable.
Built	Form
P0 2.1	DTS/DPF 2.1
The form and scale of new buildings and structures that are visible from the public realm are consistent with the prevailing historic characteristics of the historic area.	None are applicable.
PO 2.2	DTS/DPF 2.2
Development is consistent with the prevailing building and wall heights in the historic area.	None are applicable.
PO 2.3	DTS/DPF 2.3
Design and architectural detailing of street-facing buildings (including but not limited to roof pitch and form, openings, chimneys and verandahs) complement the prevailing characteristics in the historic area.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development is consistent with the prevailing front and side boundary setback pattern in the historic area.	None are applicable.
PO 2.5	DTS/DPF 2.5
Materials are either consistent with or complement those within the historic area.	None are applicable.
Alterations a	and additions
P0 3.1	DTS/DPF 3.1
Alterations and additions complement the subject building, employ a contextual design approach and are sited to ensure they do not dominate the primary façade.	Alterations and additions are fully contained within the roof space of an existing building with no external alterations made to the building elevation facing the primary street.
PO 3.2	DTS/DPF 3.2
Adaptive reuse and revitalisation of buildings to support retention consistent with the Historic Area Statement.	None are applicable.
Ancillary d	evelopment
PO 4.1	DTS/DPF 4.1
Ancillary development, including carports, outbuildings and garages, complements the historic character of the area and associated buildings.	None are applicable.
P0 4.2	DTS/DPF 4.2
Ancillary development, including carports, outbuildings and garages, is located behind the building line of the principal building(s) and does not dominate the building or its setting.	None are applicable.
PO 4.3	DTS/DPF 4.3
Advertising and advertising hoardings are located and designed to complement the building, be unobtrusive, be below the parapet line, not conceal or obstruct significant architectural elements and detailing, or	None are applicable.

Page 15 of 124 Printed on 12/07/2021

Policy24 - Enquiry		
dominate the building or its setting.		
PO 4.4	DTS/DPF 4.4	
Fencing and gates closer to a street boundary (other than a laneway) than the elevation of the associated building are consistent with the traditional period, style and form of the associated building.	None are applicable.	
Land I	Division	
PO 5.1	DTS/DPF 5.1	
Land division creates allotments that are:	None are applicable.	
(a) compatible with the surrounding pattern of subdivision in the historic area		
(b) of a dimension to accommodate buildings of a bulk and scale that reflect existing buildings and setbacks in the historic area		
Context and Stre	Leetscape Amenity	
PO 6.1	DTS/DPF 6.1	
The width of driveways and other vehicle access ways are consistent with the prevailing width of existing driveways of the historic area.	None are applicable.	
PO 6.2	DTS/DPF 6.2	
Development maintains the valued landscape patterns and characteristics that contribute to the historic area, except where they compromise safety, create nuisance, or impact adversely on buildings or infrastructure.	None are applicable.	
Dem	olition	
PO 7.1	DTS/DPF 7.1	
Buildings and structures, or features thereof, that demonstrate the historic characteristics as expressed in the Historic Area Statement are not demolished, unless:	None are applicable.	
(a) the front elevation of the building has been substantially altered and cannot be reasonably restored in a manner consistent with the building's original style or		
(b) the structural integrity or safe condition of the original building is beyond reasonable repair.		
P0 7.2	DTS/DPF 7.2	
Partial demolition of a building where that portion to be demolished does not contribute to the historic character of the streetscape.	None are applicable.	
P0 7.3	DTS/DPF 7.3	
Buildings or elements of buildings that do not conform with the values described in the Historic Area Statement may be demolished.	None are applicable.	
Ruins		
PO 8.1	DTS/DPF 8.1	
Development conserves and complements features and ruins associated with former activities of significance.	None are applicable.	

Historic Area Statements

Statement#	Statement
Historic Area	as affecting Town of Walkerville
	Medindie Historic Area Statement (Walk2)
	The Historic Area Overlay identifies localities that comprise characteristics of an identifiable historic, economic and / or social theme of

Page 16 of 124 Printed on 12/07/2021

Walk2

recognised importance. They can comprise land divisions, development patterns, built form characteristics and natural features that provide a legible connection to the historic development of a locality.

These attributes have been identified in the below table. In some cases State and / or Local Heritage Places within the locality contribute to the attributes of an Historic Area.

The preparation of an Historic Impact Statement can assist in determining potential additional attributes of an Historic Area where these are not stated in the below table.

Eras, themes and context	Very-low and low density residential. 19th Century and early 20th Century.
Allotments, subdivision and built form patterns	Predominantly detached dwellings on large, wide allotments. Allotment sizes and building setbacks vary throughout the policy area, although there are patterns established in individual streets.
Architectural styles, detailing and built form features	Range of architectural styles and dwelling types from the late 19th Century and early 20th Century periods including early Victorian, high Victorian, Edwardian, Classic Revival and large bungalows, all set within large landscaped garden settings that enhance the presentation of the dwellings.
Building height	Predominantly single storey. Two storey additions to the rear of buildings or within the roof space with single storey appearance at the street. Two storey dwellings found on Robe Terrace and on larger sites with setbacks.
Materials	Residences within this area vary in material application. Residences mostly constructed in locally sourced sandstone or bluestone, corrugated galvanised iron roofs and verandahs with cast iron lacework. Consistent early stone and brick dwellings on large sites with wide frontages to public roads.
Fencing	There is a distinctive lack of high, solid fencing and/or the use of open design of large gates to access long driveways has enabled the principal elevation of the historic homes and landscaped grounds to be visible from the public roads.
Setting, landscaping, streetscape and public realm features	Reasonably well established pattern of development, with regular spacing between buildings, front setbacks and roof pitches. Low-density residential development, with predominantly detached dwellings on allotments that are generous in width. Regular spacing between residential buildings that is primarily achieved through consistent setbacks from each side boundary. Formal avenues and regular spacing of street trees along road verges also make a positive contribution to the amenity of the area.
Representative Buildings	Identified - refer to SA planning database.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Major Urban Transport Routes Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Safe and efficient operation of Major Urban Transport Routes for all road users.	

Page 17 of 124 Printed on 12/07/2021

DO 2

Provision of safe and efficient access to and from Major Urban Transport Routes.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Deemed-to-Satisfy Criteria / Designated Performance Feature Outcome

Access - Safe Entry and Exit (Traffic Flow)

PO 1.1

Access is designed to allow safe entry and exit to and from a site to meet the needs of development and minimise traffic flow interference associated with access movements along adjacent State Maintained Roads.

DTS/DPF 1.1

An access point satisfies (a), (b) or (c):

- (a) where servicing a single (1) residential dwelling / residential allotment:
- (i) it will not result in more than one access point
 - (ii) vehicles can enter and exit the site in a forward direction
 - (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
 - (v) have a width of between 3m and 4m (measured at the site boundary).
- (b) where the development will result in 2 and up to 6 dwellings:
 - (i) it will not result in more than one access point servicing the development site
 - (ii) entry and exit movements are left turn only
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees;
 - (v) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of
 - (vi) have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site).
- (c) where the development will result in over 7 dwellings, or is a non-residential land use:
 - (i) it will not result in more than one access point servicing the development site
 - (ii) vehicles can enter and exit the site using left turn only movements
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (v) have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
 - (vi) have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
 - (vii) have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
 - (viii) provides for simultaneous two-way vehicle movements at the access;
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

B. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing

PO 2.1

Sufficient accessible onsite queuing adjacent to access points is provided to meet the needs of development so that all


DTS/DPF 2.1

An access point in accordance with one of the following:


(a) will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:

Page 18 of 124 Printed on 12/07/2021

vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption of the functional performance of the road and maintain safe vehicle movements.



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site).
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of, or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the largest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - Location (Spacing) - Existing Access Points

PO 3.1

Existing access points designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in a larger class of vehicle expected to access the site using the existing access
- (c) it is not located on a Controlled Access Road and development constitutes:
 - (i) change of use between an office less than 500m² gross leasable floor area and a consulting room less than 500m² gross leasable floor area or vice versa
 - (ii) change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) change of use from a consulting room or office less than 250m² gross leasable floor area to shop less than 250m² gross leasable floor area
 - change of use from a shop less than 500m² gross leasable floor area to a warehouse less than 500m² gross leasable floor area
 - (v) an office or consulting room with a gross leasable floor area less than 500m².

Access - Location (Spacing) - New Access Points

PO 4.1

New access points are spaced apart from any existing access point or


DTS/DPF 4.1

A new access point satisfies (a), (b) or (c):

(a) where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not

Page 19 of 124 Printed on 12/07/2021

public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road. being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:

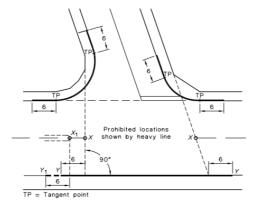

NOTE:

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y-Y extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing.
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h or	No spacing requirement	20m
less		
60 km/h	40m	123m
70 km/h	55m	151m
80 km/h	70m	181m
90 km/h	90m	214m
100 km/h	110m	248m
110 km/h	135m	285m

Access - Location (Sight Lines)

PO 5.1

DTS/DPF 5.1


Access points are located and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.

An access point satisfies (a) or (b):

 drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
40 km/h or	40m	73m
less		
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m

Page 20 of 124 Printed on 12/07/2021

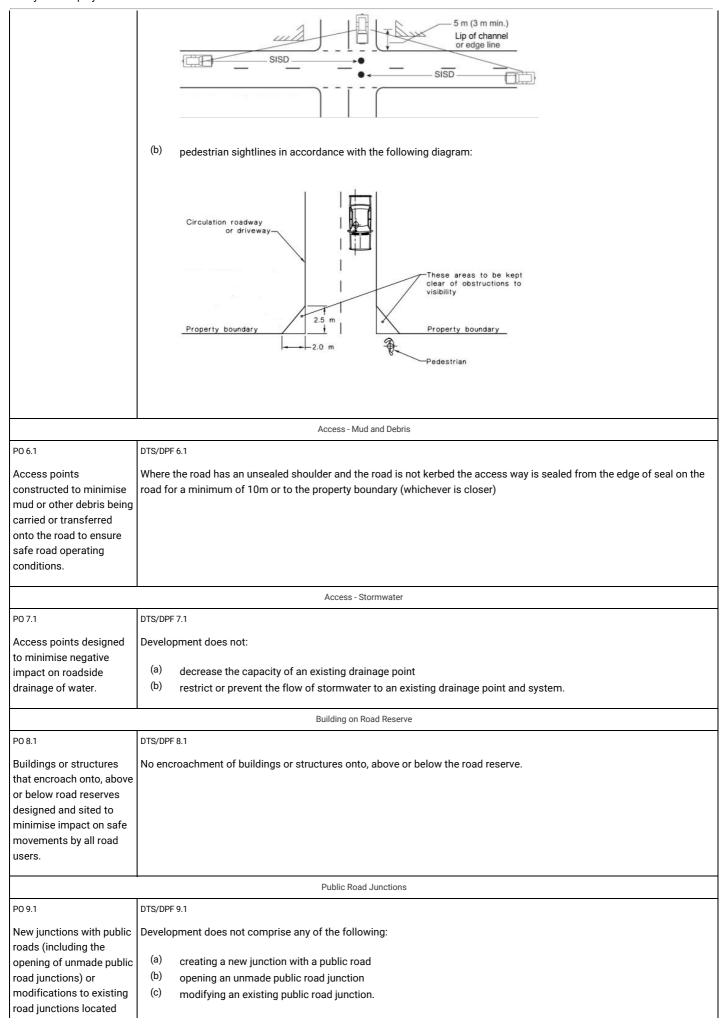

Page 21 of 124 Printed on 12/07/2021

)	
and designed to ensure safe and efficient road operating conditions are maintained on the State Maintained Road.	
	Corner Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located and designed to maintain sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram: Corner Cut-Off Area Allotment Boundary Off Area Associated wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram:

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Prescribed Wells Area Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Sustainable water use in prescribed wells areas.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
All development, but in particular involving any of the following:	Development satisfies either of the following:
(a) horticulture	(a) the applicant has a current water licence in which sufficient spare

Page 22 of 124 Printed on 12/07/2021

Policy24 - Enquiry

- (b) activities requiring irrigation
- (c) aquaculture
- (d) industry
- (e) intensive animal husbandry
- (f) commercial forestry

has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.

capacity exists to accommodate the water needs of the proposed use

(b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the Landscape South Australia Act 2019: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry. Commercial forestry that requires a forest water licence under Part 8 Division 6 of the Landscape South Australia Act 2019.	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	Tree Retention	on and Health
PO 1.1		DTS/DPF 1.1
Regulated trees are retained where they:		None are applicable.
(a)	make an important visual contribution to local character and amenity	
(b)	are indigenous to the local area and listed under the <i>National Parks and Wildlife Act 1972</i> as a rare or endangered native species and / or	
(c)	provide an important habitat for native fauna.	

Page 23 of 124 Printed on 12/07/2021

011072	+ - ⊏nqu	411 y	
PO 1.2			DTS/DPF 1.2
Significant trees are retained where they:		s are retained where they:	None are applicable.
(a)	(a) make an important contribution to the character or amenity of the local area		
(b)	Parks and Wildlife Act 1972 as a rare or endangered native species		
(c)		ent an important habitat for native fauna rt of a wildlife corridor of a remnant area of native	
(d)	vegeta		
(e)	enviror		
(f)	and / o form a	r notable visual element to the landscape of the local area.	
PO 1.3			DTS/DPF 1.3
	lamagin s (a) an	g activity not in connection with other development d (b):	None are applicable.
(a)		maging activity is only undertaken to:	
	(i)	remove a diseased tree where its life expectancy is short	
	(ii)	mitigate an unacceptable risk to public or private safety due to limb drop or the like	
	(iii)	rectify or prevent extensive damage to a building of value as comprising any of the following:	
		A. a Local Heritage Place B. a State Heritage Place	
		B. a State Heritage PlaceC. a substantial building of value	
		and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity	
	(iv)	reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire	
	(v)	treat disease or otherwise in the general interests of the health of the tree and / or	
	(vi)	maintain the aesthetic appearance and structural integrity of the tree	
(b)	unless	ion to a significant tree, tree-damaging activity is avoided all reasonable remedial treatments and measures have etermined to be ineffective.	
P0 1.4			DTS/DPF 1.4
A tree-d		g activity in connection with other development satisfies all	None are applicable.
(a)	accord	mmodates the reasonable development of land in ance with the relevant zone or subzone where such pment might not otherwise be possible	
(b)	option	case of a significant tree, all reasonable development is and design solutions have been considered to prevent intial tree-damaging activity occurring.	
		Ground work	affecting trees
PO 2.1			DTS/DPF 2.1
unduly	compro	significant trees, including their root systems, are not mised by excavation and / or filling of land, or the sealing of the vicinity of the tree to support their retention and health.	None are applicable.
			S
		Land I	Division
PO 3.1			DTS/DPF 3.1

Page 24 of 124 Printed on 12/07/2021

Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.

(a) there are no regulated or significant trees located within or adjacent to the plan of division or

(b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Stormwater Management Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Development incorporates water sensitive urban design techniques to capture and re-use stormwater.	

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
PO 1.1	DTS/DPF 1.1
(a) maximise conservation of water resources (b) manage peak stormwater runoff flows and volume to ens carrying capacities of downstream systems are not overlow manage stormwater runoff quality.	dwellings, or less than 5 group dwellings or dwellings within a residential flat building: sure the

Page 25 of 124 Printed on 12/07/2021

	<200	1000	1000
	200-400	2000	Site perviousness <30%: 1000
			Site perviousness ≥30%: N/A
	>401	4000	Site perviousness <35%: 1000
			Site perviousness ≥35%: N/A

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Traffic Generating Development Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Traffic General	ting Development
P0 1.1	DTS/DPF 1.1
Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.

Page 26 of 124 Printed on 12/07/2021

PO 1.2	DTS/DPF 1.2	
Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.	
PO 1.3	DTS/DPF 1.3	
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) Iand division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class	of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
met, any of the follow proposed within 250 (a) land division allotments (b) commercial 10,000m² of commercial develor 2,000m² of commercial develor and the commercial de	opment with a gross floor area of	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Urban Tree Canopy Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Residential development preserves and enhances urban tree canopy through the planting of new trees and retention of existing mature trees where practicable.	

Performance Outcome	Deemed-to-Satisfy Criteria /

Page 27 of 124 Printed on 12/07/2021

Designated Performance Feature

PO 1.1

Trees are planted or retained to contribute to an urban tree canopy.

DTS/DPF 1 1

Tree planting is provided in accordance with the following:

Site size per dwelling (m ²)	Tree size* and number required per dwelling
<450	1 small tree
450-800	1 medium tree or 2 small trees
>800	1 large tree or 2 medium trees or 4 small trees

*refer Table 1 Tree Size

Table 1 Tree Size			
Tree size	Mature height (minimum) (minimum)		Soil area around tree within development site (minimum)
Small	4 m	2m	10m ² and min. dimension of 1.5m
Medium	6 m	4 m	30m ² and min. dimension of 2m
Large	12 m	8m	60m ² and min. dimension of 4m

The discount in Column D of Table 2 discounts the number of trees required to be planted in DTS/DPF 1.1 where existing tree(s) are retained on the subject land that meet the criteria in Columns A, B and C of Table 2, and are not a species identified in Regulation 3F(4)(b) of the Planning Development and Infrastructure (General) Regulations 2017.

Table 2 Tree Discounts			
Retained tree height (Column A)	Retained tree spread (Column B)	Retained soil area around tree within development site (Column C)	Discount applied (Column D)
4-6m	2-4m	10m ² and min. dimension of 1.5m	2 small trees (or 1 medium tree)
6-12m	4-8m	30m ² and min. dimension of 3m	2 medium trees (or 4 small trees)
>12m	>8m	60m ² and min. dimension of 6m	2 large trees (or 4 medium trees, or 8 small trees)

Page 28 of 124 Printed on 12/07/2021

Note: In order to satisfy DTS/DPF 1.1, payment may be made in accordance with a relevant off-set scheme established by the Minister under section 197 of the Planning, Development and Infrastructure Act 2016, provided the provisions and requirements of that scheme are satisfied. For the purposes of section 102(4) of the Planning, Development and Infrastructure Act 2016, an applicant may elect for any of the matters in DTS/DPF 1.1 to be reserved.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

	Desired Outcome
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Арре	earance
P01.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following: (a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above parapet height B. are not attached to the roof of the building (c) where they are not flush with a wall: (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure

Page 29 of 124 Printed on 12/07/2021

	(ii) if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the building B. does not protrude beyond the outer limits of any verandah structure below C. does not have a sign face that exceeds 1m2 per side. (d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building.
	(g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure
	(h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building (i) where they are flush with a wall, do not, in combination with any
	other existing sign, cover more than 15% of the building facade to which they are attached.
PO 1.2 Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	DTS/DPF 1.2 Where development comprises an advertising hoarding, the supporting structure is:
	concealed by the associated advertisement and decorative detailing or not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
PO 1.3 Advertising does not encroach on public land or the land of an adjacent allotment.	DTS/DPF 1.3 Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4 Where possible, advertisements on public land are integrated with existing structures and infrastructure.	DTS/DPF 1.4 Advertisements on public land that meet at least one of the following: (a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.
PO 1.5 Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	DTS/DPF 1.5 None are applicable.
Proliferation of	Advertisements
PO 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
PO 2.3 Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	DTS/DPF 2.3 Advertisements satisfy all of the following:
	(a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush

Page 30 of 124 Printed on 12/07/2021

	with a wall, cover no more than 15% of the building facade to which they are attached (c) do not result in more than one sign per occupancy that is not flush with a wall.
Advertisir	ng Content
PO 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amenity	/ Impacts
PO 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
Sa	fety
PO 5.1	DTS/DPF 5.1
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.
P0 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
P0 5.3	DTS/DPF 5.3
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following: (a) are not located in a public road or rail reserve
 (a) being liable to interpretation by drivers as an official traffic sign or signal (b) obscuring or impairing drivers' view of official traffic signs or 	(b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram
signals (c) obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings.	Corner Cut- Off Area 4.5M Road Reserve
PO 5.4	DTS/DPF 5.4
Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
PO 5.5	DTS/DPF 5.5
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	(a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal:
	(a) 110 km/h road - 14m (b) 100 km/h road - 13m

Page 31 of 124 Printed on 12/07/2021

	(c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

	Desired Outcome
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting at	nd Design
P01.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.
Horse Keeping	
PO 2.1	DTS/DPF 2.1
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.
PO 2.2	DTS/DPF 2.2
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.
PO 2.3	DTS/DPF 2.3
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.
PO 2.4	DTS/DPF 2.4

Page 32 of 124 Printed on 12/07/2021

Policy24 - Enquiry		
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.	
PO 2.5 Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	DTS/DPF 2.5 Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).	
Ken	nels	
PO 3.1 Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	DTS/DPF 3.1 The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.	
PO 3.2 Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as: (a) adopting appropriate separation distances (b) orientating openings away from sensitive receivers.	DTS/DPF 3.2 Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.	
PO 3.3 Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	DTS/DPF 3.3 Kennels are sited in association with a permanent dwelling on the land.	
Wastes		
PO 4.1 Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	DTS/DPF 4.1 None are applicable.	
PO 4.2 Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	DTS/DPF 4.2 Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.	

Aquaculture

Assessment Provisions (AP)

Desired Outcome		
DO 1	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land-based Aquaculture	
PO 1.1	DTS/DPF 1.1
Land-based aquaculture and associated components are sited and	Land-based aquaculture and associated components are located to

Page 33 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
designed to mitigate adverse impacts on nearby sensitive receivers.	(a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers.
P01.2	DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
PO 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.
PO 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	None are applicable.
PO 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.
Marine Base	d Aquaculture
P0 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including:	None are applicable.
(a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.	
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
P0 2.4	DTS/DPF 2.4
P0 2.4 Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	DTS/DPF 2.4 Marine aquaculture development is located 100m or more seaward of the high water mark.
Marine aquaculture (other than inter-tidal aquaculture) is located an	Marine aquaculture development is located 100m or more seaward of the

Page 34 of 124 Printed on 12/07/2021

i Olicy24	F - Eriquity	
(a)	areas of high public use	
(b)	areas, including beaches, used for recreational activities such as	
(c)	swimming, fishing, skiing, sailing and other water sports areas of outstanding visual or environmental value	
(d)	areas of high tourism value	
(e)	areas of important regional or state economic activity, including commercial ports, wharfs and jetties	
(f)	the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	
PO 2.6		DTS/DPF 2.6
	aquaculture is sited and designed to minimise interference and tion to the natural processes of the coastal and marine ment.	None are applicable.
P0 2.7		DTS/DPF 2.7
	aquaculture is designed to be as unobtrusive as practicable by rating measures such as:	None are applicable.
(a)	using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b)	positioning structures to protrude the minimum distance practicable above the surface of the water	
(c)	avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons	
(d)	positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8		DTS/DPF 2.8
roads, t	launching and maintenance facilities utilise existing established racks, ramps and paths to or from the sea where possible to be environmental and amenity impacts.	None are applicable.
PO 2.9		DTS/DPF 2.9
user fac	launching and maintenance facilities are developed as common silities and are co-located where practicable to mitigate adverse son coastal areas.	None are applicable.
PO 2.10		DTS/DPF 2.10
	aquaculture is sited to minimise potential impacts on, and to the integrity of, reserves under the National Parks and Wildlife Act	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .
PO 2.11		DTS/DPF 2.11
	e storage, cooling and processing facilities do not impair the e and its visual amenity by:	None are applicable.
(a)	being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape	
(b)	making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access arrangements as far as practicable	
(c)	incorporating appropriate waste treatment and disposal.	
	Navigation	and Safety
PO 3.1		DTS/DPF 3.1
Marine safety.	aquaculture sites are suitably marked to maintain navigational	None are applicable.
PO 3.2		DTS/DPF 3.2
		!

Page 35 of 124 Printed on 12/07/2021

Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	None are applicable.
Environmenta	l Management
P0 4.1	DTS/DPF 4.1
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.
PO 4.2	DTS/DPF 4.2
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.
PO 4.3	DTS/DPF 4.3
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.
PO 4.4	DTS/DPF 4.4
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	None are applicable.

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome
Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Odour a	nd Noise
P0 1.1	DTS/DPF 1.1
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.
PO 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.

Page 36 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
P0 1.4	DTS/DPF 1.4
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.
PO 1.5	DTS/DPF 1.5
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Water	Quality
P0 2.1	DTS/DPF 2.1
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
PO 2.2	DTS/DPF 2.2
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.
P0 2.3	DTS/DPF 2.3
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.
P0 2.4	DTS/DPF 2.4
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.
Wastewat	I er Irrigation
P0 3.1	DTS/DPF 3.1
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.
P0 3.2	DTS/DPF 3.2
Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.
P0 3.3	DTS/DPF 3.3
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as: (a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding	None are applicable.
(d) steeply sloping land	
(e) rocky or highly permeable soil overlaying an unconfined aquifer.	

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

Page 37 of 124 Printed on 12/07/2021

Desired Outcome

DO 1

Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance Feature Siting and Design PO 1.1 DTS/DPF 1.1 Bulk handling and storage facilities are sited and designed to minimise Facilities for the handling, storage and dispatch of commodities in bulk risks of adverse air quality and noise impacts on sensitive receivers. (excluding processing) meet the following minimum separation distances from sensitive receivers: bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more. **Buffers and Landscaping** PO 2.1 DTS/DPF 2.1 Bulk handling and storage facilities incorporate a buffer area for the None are applicable. establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares. PO 2.2 DTS/DPF 2.2 Bulk handling and storage facilities incorporate landscaping to assist with None are applicable. screening and dust filtration. Access and Parking PO 3.1 DTS/DPF 3.1 Roadways and vehicle parking areas associated with bulk handling and Roadways and vehicle parking areas are sealed with an all-weather storage facilities are designed and surfaced to control dust emissions and surface. prevent drag out of material from the site. Slipways, Wharves and Pontoons PO 4.1 DTS/DPF 4.1 Slipways, wharves and pontoons used for the handling of bulk materials None are applicable. (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.

Page 38 of 124 Printed on 12/07/2021

Clearance from Overhead Powerlines

Assessment Provisions (AP)

	Desired Outcome
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
P0 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act</i> 1996 (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

		Desired Outcome		
DO 1	Development is:			
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area		
	(b)	durable - fit for purpose, adaptable and long lasting		
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors		
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.		

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All development		
External Appearance		
PO 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like,	None are applicable.	

Page 39 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	
P0 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment is integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.
positioning plant and equipment in unobtrusive locations viewed from public roads and spaces screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent	
sensitive land uses.	
P0 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone.	None are applicable.
- Sa	fety
PO 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
PO 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	caping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting is incorporated to:	None are applicable.
 (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity. 	
Contribute to blourversity.	

Page 40 of 124 Printed on 12/07/2021

PO 3.2 DTS/DPF 3.2 Soft landscaping and tree planting maximises the use of locally indigenous None are applicable. plant species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species. **Environmental Performance** PO 4.1 DTS/DPF 4.1 Buildings are sited, oriented and designed to maximise natural sunlight None are applicable. access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 DTS/DPF 4.2 Buildings are sited and designed to maximise passive environmental None are applicable. performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. PO 4.3 DTS/DPF 4.3 Buildings incorporate climate-responsive techniques and features such as None are applicable. building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells. Water Sensitive Design PO 5.1 DTS/DPF 5.1 Development is sited and designed to maintain natural hydrological None are applicable. systems without negatively impacting: (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs. On-site Waste Treatment Systems PO 6.1 DTS/DPF 6.1 Dedicated on-site effluent disposal areas do not include any areas to be Effluent disposal drainage areas do not: used for, or could be reasonably foreseen to be used for, private open encroach within an area used as private open space or result in space, driveways or car parking. less private open space than that specified in Design Table 1 -Private Open Space (b) use an area also used as a driveway encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. Carparking Appearance PO 7.1 DTS/DPF 7.1 Development facing the street is designed to minimise the negative None are applicable. impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure. P0 7 2 DTS/DPF 7.2 Vehicle parking areas are appropriately located, designed and constructed None are applicable. to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.

Page 41 of 124 Printed on 12/07/2021

Policy24 - Eriquity	1
P07.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
P0 7.4	DTS/DPF 7.4
Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	None are applicable.
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	None are applicable.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks at	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks,	Development does not involve any of the following:
minimises the need for earthworks to limit disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m
	(b) filling exceeding a vertical height of 1m
	(c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2
Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway
	(b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
(a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people	
and goods to and from the development (c) are designed to integrate with the natural topography of the land.	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.
Fences a	LW II-

Page 42 of 124 Printed on 12/07/2021

Several public roads and public open space to minimise visual impacts. Side of a retaining wall.	Policy24 - Enquiry			
privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sanilight or the amenity of public places. PO 92 Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimize visual impacts. PO 101.1 Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses. PO 102 PO 102 Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses. PO 102 Development mitigates direct overlooking from bloonest terraces and decks to habitable rooms and private open space of adjoining residential uses. PO 102 Development mitigates direct overlooking from bloonest terraces and decks to habitable rooms and private open space of adjoining residential uses. PO 103 PO 104 Development mitigates direct overlooking from bloonest terraces and decks to habitable rooms and private open space of adjoining residential uses. PO 103 AN Residential development of the blooky of the window less than 1.5 m shove the finished floor level. (a) Interpretation of the window less than 1.5 m shove the finished floor level. (b) Interpretation of the blacky of terrace will face a public road, public road reserve or public reserve that it at least 15m wide in all places faced by the balacony or terrace will face a public road, public road reserve or public reserve that it is at least 15m wide in all places faced by the balacony or terrace will face a public road, public road reserve or public reserve that it is at least 15m wide in all places faced by the balacony or terrace will face a public road, public road reserve or public reserve that it is at least 15m wide in local terraces on upper building levels are permanently obscured by receiving faced to a minimum height of: (a) In a proporate windows along primary street frontages to read the proporate windows along primary street fron	PO 9.1	DTS/DPF 9.1		
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts. Overlooking / Year Physiol Property	privacy and security without unreasonably impacting the visual amenity	None are applicable.		
Development miligates direct overlooking from upper level windows to habitable rooms and private open space of adjoining residential uses. Upper level windows facing side or rear boundaries shared with a residential allotment/aits satisfy one of the following: 40	PO 9.2	DTS/DPF 9.2		
Development miligates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses. Disper time windows facing side or rear boundaries shared with a residential allotment/site satisfy on of the following: (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more that 200mm (b) have still heights greater than or equal to 1.5m above finished floor level and are fixed or not capable of being opened more that 200mm (b) have still heights greater than or equal to 1.5m above finished floor level. DISCOPTION Development miligates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. DISCOPTION Development miligates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. DISCOPTION Development miligates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. DISCOPTION Development miligates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. DISCOPTION (a) the longest side of the balcony or terrace will face a public rood, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace. All Residential development Front evaluation of very development The contract of least 15m between the balcony is considered that the advanced by the public road of the street from the nearest habitable window of a develling an adjacent land or a balbitable room that has a minimum internal room dimension of 2.4m Development miligates direct overlooks at least 1 and reserve that has a minimum internal room dimension of 2.4m Development		A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.		
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential alues. (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm (b) have still heights greater than or equal to 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm (b) have still heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and site adjacent to any part of the window less than 1.5 m above the finished floor level. Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. Development mitigates direct overlooking from balconies, terraces and decks to habitable room that is at least 15 mitigates and 15 mitigat	Overlooking / Visual Privacy	(in building 3 storeys or less)		
habitable rooms and private open spaces of adjoiring residential uses. Policy	PO 10.1	DTS/DPF 10.1		
floor level and are fixed or not capable of being opened more that 200mm				
Colorador Floor		floor level and are fixed or not capable of being opened more than		
PO 10.2 Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. DISJORF 10.2 Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. Of the longest side of the balcony or terrace will face a public road, public read reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace out of all places faced by the balcony or terrace out of all places faced by the balcony or terrace on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (a) the longest side of the balcony or terrace will face a public road, public reader vental is at least 15m wide in all places faced by the balcony or terrace or or all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (b) 1.5m above finished floor level where the balcony is located at least 15m etres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases DISJORF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. DISJORF 11.2 Devellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Outlook and amently DISJORF 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		1		
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses. One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 meres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DIS/OPF 11.2 Dwellings with a frontage to a public street have an entry door visible fronterim y street boundary. PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m		
decks to habitable rooms and private open space of adjoining residential uses. (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is 1.5m above finished floor level where the balcony is 1.7m above finished floor level in all other cases All Residential development Front elevations and passive surveillance Front elevations and passive surveillance and make a positive contribution to the streetscape. DTS/DFF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m. (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DFF 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DFF 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	PO 10.2	DTS/DPF 10.2		
uses. (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (iii) 1.7m above finished floor level in all other cases PO11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DFF 11.2 Dwellings with a frontage to a public street have an entry door visible fron the primary street boundary. PO12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	Development mitigates direct overlooking from balconies, terraces and	One of the following is satisfied:		
(b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency-prings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases All Residential development Front elevations and passive surveillance PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. DTS/DPF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 DWellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible fron the primary street boundary. PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace		
All Residential development Front elevations and passive surveillance PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. Back dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. Outlook and amenity PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		(b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land		
PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. DTS/DPF 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		(ii) 1.7m above finished floor level in all other cases		
PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. DTS/DPF 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook				
PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 DTS/DPF 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. Outlook and amenity PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	All Residentia	al development		
Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	Front elevations and	d passive surveillance		
encourage passive surveillance and make a positive contribution to the streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 District District Pound of the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. District Pound of the primary street boundary. District Pound of a public street have an entry door visible from the primary street boundary. District Pound of a dwelling incorporates a window with an outlook. A living room of a dwelling incorporates a window with an outlook.	PO 11.1	DTS/DPF 11.1		
streetscape. (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dis/DPF 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Dis/DPF 12.1 Dis/DPF 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		Each dwelling with a frontage to a public street:		
(b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. Outlook and amenity PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		habitable room that has a minimum internal room dimension of		
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. Outlook and amenity PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook		(b) has an aggregate window area of at least 2m ² facing the primary		
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors. Dwellings with a frontage to a public street have an entry door visible from the primary street boundary. Outlook and amenity PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	P0 11.2	DTS/DPF 11.2		
PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	Dwellings incorporate entry doors within street frontages to address the	Dwellings with a frontage to a public street have an entry door visible from		
Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook	Outlook and amenity			
	PO 12.1	DTS/DPF 12.1		
\cdot				

Page 43 of 124 Printed on 12/07/2021

Policy24 - Enquiry			
	waterfront areas.		
PO 12.2	DTS/DPF 12.2		
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.		
Ancillary D	relopment		
PO 13.1	DTS/DPF 13.1		
Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.	(a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2 (c) are not constructed, added to or altered so that as situated: (i) in front of any part of the building line of the which it is ancillary or (ii) within 900mm of a boundary of the allothed secondary street (if the land has boundary more roads) (d) in the case of a garage or carport, the garage or compared in the secondary street (ii) when facing a primary street or secondary total door / opening not exceeding: A. for dwellings of single building lewidth or 50% of the site frontage the lesser B. for dwellings comprising two or levels at the building line fronting public street - 7m in width	the dwelling to ment with a wries on two or carport: lary of the ry street, has a evel - 7m in e, whichever is	
	(e) if situated on a boundary (not being a boundary w street or secondary street), do not exceed a lengt unless: (i) a longer wall or structure exists on the ad is situated on the same allotment boundary and (ii) the proposed wall or structure will be built same length of boundary as the existing a structure to the same or lesser extent	th of 11.5m djacent site and ary ilt along the	
	residential flat building or group dwelling(s), average site area) (m ²)	Ils or structures h of that ong the same iddary there is an it to or about the imabove natural ore than 5m inted in a non-ance with (i) or ing table: Minimum intercentage of ite	
	<150	0%	

Page 44 of 124 Printed on 12/07/2021

Policy24 - Enquiry			
	150-200 15%		
	201-450 20%		
	>450 25%		
	(ii) the amount of existing soft landscaping prior to the development occurring.		
PO 13.2 Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision or car parking requirements and do not result in over-development of the site.	DTS/DPF 13.2 Ancillary buildings and structures do not result in: (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.		
PO 13.3	DTS/DPF 13.3		
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: (a) enclosed in a solid acoustic structure that is located at least 5m.		
	(a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment or		
	(b) located at least 12m from the nearest habitable room located on an adjoining allotment.		
Garage a	ppearance		
PO 14.1	DTS/DPF 14.1		
Garaging is designed to not detract from the streetscape or appearance	Garages and carports facing a street:		
of a dwelling.	 (a) are situated so that no part of the garage or carport is in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening not exceeding 7m in width (d) have a garage door / opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at 		
	the building line fronting the same public street.		
	ssing		
P0 15.1	DTS/DPF 15.1		
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable		
Dwelling	additions		
PO 16.1	DTS / DPF 16.1		
Dwelling additions are sited and designed to not detract from the Dwelling additions:			
streetscape or amenity of adjoining properties and do not impede on-site			

Page 45 of 124 Printed on 12/07/2021

and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas

- (vi) upper level windows facing side or rear boundaries unless:
 - A. they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm or
 - B. have sill heights greater than or equal to 1.5m above finished floor level
 - C. incorporate screening to a height of 1.5m above finished floor level
- (vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - A. 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land
 - B. 1.7m above finished floor level in all other cases.

Private Open Space

PO 17.1

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

DTS/DPF 17.1

Private open space is provided in accordance with Design Table 1 - Private Open Space.

Water Sensitive Design

PO 18.1

Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.

DTS/DPF 18.1

Residential development creating a common driveway / access that services 5 or more dwellings achieves the following stormwater runoff outcomes:

- (a) 80 per cent reduction in average annual total suspended solids
- (b) 60 per cent reduction in average annual total phosphorus
- (c) 45 per cent reduction in average annual total nitrogen.

PO 18.2

Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.

DTS/DPF 18.2

Development creating a common driveway / access that services 5 or more dwellings:

- (a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased or
 - captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and
- (b) manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings.

Car parking, access and manoeuvrability

PO 19.

Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.

DTS/DPF 19.1

Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):

- (a) single width car parking spaces:
 - (i) a minimum length of 5.4m per space

Page 46 of 124 Printed on 12/07/2021

Policy24 - Eriquity	
	(ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side):
	(i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 19.2	DTS/DPF 19.2
Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have:
	(a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3	DTS/DPF 19.3
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages, domestic waste collection and on-street parking.	Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an
trees.	(a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land
	(b) where newly proposed:
	(i) is set back 6m or more from the tangent point of an intersection of 2 or more roads
	(ii) is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing
	(iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.
PO 19.5	DTS/DPF 19.5
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that:
	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average
	(b) they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary
	(c) if located to provide access from an alley, lane or right of way the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site
PO 19.6	DTS/DPF 19.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.

Page 47 of 124 Printed on 12/07/2021

Waste storage PO 20 1 DTS/DPF 20.1 Provision is made for the adequate and convenient storage of waste bins None are applicable. in a location screened from public view. Design of Transportable Dwellings PO 21.1 DTS/DPF 21.1 The sub-floor space beneath transportable buildings is enclosed to give Buildings satisfy (a) or (b): the appearance of a permanent structure. are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Group dwelling, residential flat buildings and battle-axe development Amenity PO 22.1 DTS/DPF 22.1 Dwellings are of a suitable size to accommodate a layout that is well Dwellings have a minimum internal floor area in accordance with the organised and provides a high standard of amenity for occupants. following table: **Number of bedrooms** Minimum internal floor area Studio 35m²1 bedroom 50m² 2 bedroom 65m² 3+ bedrooms 80m² and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom PO 22.2 DTS/DPF 22.2 The orientation and siting of buildings minimises impacts on the amenity, None are applicable. outlook and privacy of occupants and neighbours. PO 22.3 DTS/DPF 22.3 Development maximises the number of dwellings that face public open None are applicable. space and public streets and limits dwellings oriented towards adjoining properties. PO 22.4 DTS/DPF 22.4 Battle-axe development is appropriately sited and designed to respond to Dwelling sites/allotments are not in the form of a battle-axe arrangement. the existing neighbourhood context. Communal Open Space PO 23.1 DTS/DPF 23.1 Private open space provision may be substituted for communal open None are applicable. space which is designed and sited to meet the recreation and amenity needs of residents. PO 23.2 DTS/DPF 23.2 Communal open space is of sufficient size and dimensions to cater for Communal open space incorporates a minimum dimension of 5 metres. group recreation.

Page 48 of 124 Printed on 12/07/2021

, , ,			
PO 23.3	DTS/DPF 23.3		
Communal open space is designed and sited to:	None are applicable.		
(a) be conveniently accessed by the dwellings which it services(b) have regard to acoustic, safety, security and wind effects.			
PO 23.4	DTS/DPF 23.4		
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.		
PO 23.5	DTS/DPF 23.5		
Communal open space is designed and sited to:	None are applicable.		
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.			
Carparking, access	and manoeuvrability		
PO 24.1 Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	DTS/DPF 24.1 Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements: (a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly		
P0 24.2	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. DTS/DPF 24.2		
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.		
PO 24.3	DTS/DPF 24.3		
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.		
PO 24.4	DTS/DPF 24.4		
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.		
PO 24.5	DTS/DPF 24.5		
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.		
PO 24.6	DTS/DPF 24.6		
Dwellings are adequately separated from common driveways and	Dwelling walls with entry doors or ground level habitable room windows		

Page 49 of 124 Printed on 12/07/2021

Policy24 - Enquiry			
manoeuvring areas.	are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.		
Soft Landscaping			
PO 25.1	DTS/DPF 25.1		
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.		
PO 25.2	DTS/DPF 25.2		
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m i provided between the driveway and site boundary (excluding along the perimeter of a passing point).		
Site Facilities /	Waste Storage		
PO 26.1	DTS/DPF 26.1		
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.		
P0 26.2	DTS/DPF 26.2		
Provision is made for suitable external clothes drying facilities.	None are applicable.		
P0 26.3	DTS/DPF 26.3		
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.		
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.			
PO 26.4	DTS/DPF 26.4		
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.		
PO 26.5	DTS/DPF 26.5		
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.		
PO 26.6	DTS/DPF 26.6		
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.		
Supported accommodation and retirement facilities			
Siting and Configuration			
PO 27.1	DTS/DPF 27.1		
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.		
	and Access		
P0 28.1	DTS/DPF 28.1		
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.		
(a) ground-level access or lifted access to all units			

Page 50 of 124 Printed on 12/07/2021

PO 30.5

level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal Open Space DTS/DPF 29.1 PO 29.1 Development is designed to provide attractive, convenient and None are applicable. comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 29.2 DTS/DPF 29.2 Private open space provision may be substituted for communal open None are applicable. space which is designed and sited to meet the recreation and amenity needs of residents. PO 29.3 DTS/DPF 29.3 Communal open space is of sufficient size and dimensions to cater for Communal open space incorporates a minimum dimension of 5 metres. group recreation. PO 29.4 DTS/DPF 29.4 Communal open space is designed and sited to: None are applicable. (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. PO 29.5 DTS/DPF 29.5 Communal open space contains landscaping and facilities that are None are applicable. functional, attractive and encourage recreational use. DTS/DPF 29 6 Communal open space is designed and sited to: None are applicable. in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. Site Facilities / Waste Storage PO 30.1 DTS/DPF 30.1 Development is designed to provide storage areas for personal items and None are applicable. specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles. PO 30.2 DTS/DPF 30.2 Provision is made for suitable mailbox facilities close to the major None are applicable. pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 30.3 DTS/DPF 28.3 Provision is made for suitable external clothes drying facilities. None are applicable. DTS/DPF 30.4 Provision is made for suitable household waste and recyclable material None are applicable. storage facilities conveniently located and screened from public view.

Page 51 of 124 Printed on 12/07/2021

DTS/DPF 30.5

Policy24 - Enquiry

	Enquiry			
Waste and dwellings.	d recyclable material storage areas are located away from	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.		
PO 30.6		DTS/DPF 30.6		
	is made for on-site waste collection where 10 or more bins are ected at any one time.	None are applicable.		
PO 30.7		DTS/DPF 30.7		
	ncluding gas and water meters are conveniently located and from public view.	None are applicable.		
	All non-residen	ial development		
	Water Sens	itive Design		
PO 31.1		DTS/DPF 31.1		
grease inc	ent likely to result in significant risk of export of litter, oil or cludes stormwater management systems designed to minimise entering stormwater.	None are applicable.		
PO 31.2		DTS/DPF 31.2		
	charged from a development site is of a physical, chemical and condition equivalent to or better than its pre-developed state.	None are applicable.		
	Wash-down and Waste	Loading and Unloading		
PO 32.1	Wash-down and Waste	Loading and Unloading DTS/DPF 32.1		
Areas for a	Wash-down and Waste activities including loading and unloading, storage of waste in commercial and industrial development or wash-down areas he cleaning of vehicles, vessels, plant or equipment are:			
Areas for a refuse bins used for th	activities including loading and unloading, storage of waste s in commercial and industrial development or wash-down areas	DTS/DPF 32.1		
Areas for a refuse bins used for th (a) de wi su (b) pa	activities including loading and unloading, storage of waste in commercial and industrial development or wash-down areas the cleaning of vehicles, vessels, plant or equipment are: esigned to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external	DTS/DPF 32.1		
Areas for a refuse bins used for the (a) de wi su (b) pa cc (c) of	activities including loading and unloading, storage of waste is in commercial and industrial development or wash-down areas the cleaning of vehicles, vessels, plant or equipment are: esigned to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external urface stormwater run-off aved with an impervious material to facilitate wastewater	DTS/DPF 32.1		

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): $4m^2$ with a minimum dimension 1.8m One bedroom: $8m^2$ with a minimum dimension 2.1m Two bedroom dwelling: $11m^2$ with a minimum dimension 2.4m

Page 52 of 124 Printed on 12/07/2021

	Three + bedroom dwelling: 15m ² with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Develo	opment is:	
	(a) (b)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality durable - fit for purpose, adaptable and long lasting	
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All Development		
External Appearance		
PO 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
P0 1.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.	
(a) positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating		

Page 53 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
the plant and equipment as far as practicable from adjacent sensitive land uses.	
P0 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.
Sa	fety
P0 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
P0 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
P0 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
P0 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	scaping
P0 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
(a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes.	
cimande the appearance of tails and offectoapes.	
Environmenta	al Performance
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.

Page 54 of 124 Printed on 12/07/2021

Water Sensitive Design PO 5 1 DTS/DPF 5.1 Development is sited and designed to maintain natural hydrological None are applicable. systems without negatively impacting: (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs. On-site Waste Treatment Systems PO 6.1 DTS/DPF 6.1 Dedicated on-site effluent disposal areas do not include any areas to be Effluent disposal drainage areas do not: used for, or could be reasonably foreseen to be used for, private open encroach within an area used as private open space or result in space, driveways or car parking. less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. Car parking appearance PO 7.1 DTS/DPF 7.1 Development facing the street is designed to minimise the negative None are applicable. impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure. PO 7.2 DTS/DPF 7.2 Vehicle parking areas appropriately located, designed and constructed to None are applicable. minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like. PO 7.3 DTS/DPF 7.3 Safe, legible, direct and accessible pedestrian connections are provided None are applicable. between parking areas and the development. PO 7.4 DTS/DPF 7.4 Street-level vehicle parking areas incorporate tree planting to provide Vehicle parking areas that are open to the sky and comprise 10 or more shade, reduce solar heat absorption and reflection. car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m. P0 7 5 DTS/DPF 7.5 Street level parking areas incorporate soft landscaping to improve visual Vehicle parking areas comprising 10 or more car parking spaces include appearance when viewed from within the site and from public places. soft landscaping with a minimum dimension of: (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces. DTS/DPF 7.6 Vehicle parking areas and associated driveways are landscaped to provide None are applicable. shade and positively contribute to amenity. PO 7.7 DTS/DPF 7.7

Page 55 of 124 Printed on 12/07/2021

Vehicle parking areas and access ways incorporate integrated stormwater | None are applicable. management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks and sloping land PO 8.1 DTS/DPF 8.1 Development, including any associated driveways and access tracks, Development does not involve any of the following: minimises the need for earthworks to limit disturbance to natural excavation exceeding a vertical height of 1m topography. (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or DTS/DPF 8.2 PO 8 2 Driveways and access tracks designed and constructed to allow safe and Driveways and access tracks on sloping land (with a gradient exceeding 1 convenient access on sloping land. in 8) satisfy (a) and (b): do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. PO 8.3 DTS/DPF 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 None are applicable. in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. PO 8.4 DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the None are applicable. alteration of natural drainage lines and includes on site drainage systems to minimise erosion. PO 8.5 DTS/DPF 8.5 Development does not occur on land at risk of landslip or increase the None are applicable. potential for landslip or land surface instability. Fences and walls PO 9.1 DTS/DPF 9.1 Fences, walls and retaining walls of sufficient height maintain privacy and None are applicable. security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places. PO 9.2 DTS/DPF 9.2 Landscaping is incorporated on the low side of retaining walls that are A vegetated landscaped strip 1m wide or more is provided against the low visible from public roads and public open space to minimise visual side of a retaining wall. impacts. Overlooking / Visual Privacy (low rise buildings) PO 10.1 DTS/DPF 10.1 Development mitigates direct overlooking from upper level windows to Upper level windows facing side or rear boundaries shared with a habitable rooms and private open spaces of adjoining residential uses in residential use in a neighbourhood-type zone: neighbourhood-type zones. are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm (b) have sill heights greater than or equal to 1.5m above finished floor level

Page 56 of 124 Printed on 12/07/2021

(c)

incorporate screening with a maximum of 25% openings,

Policy24 - Eriquity			
	permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.		
PO 10.2	DTS/DPF 10.2		
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type zones.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are		
	permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases		
Site Facilities / Waste Storage (exclu	ding low rise residential development)		
P0 11.1	DTS/DPF 11.1		
Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	None are applicable.		
P0 11.2	DTS/DPF 11.2		
Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.		
P0 11.3	DTS/DPF 11.3		
Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	None are applicable.		
PO 11.4	DTS/DPF 11.4		
Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	None are applicable.		
P0 11.5	DTS/DPF 11.5		
For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	None are applicable.		
All Development - N	fedium and High Rise		
External A	Appearance		
PO 12.1	DTS/DPF 12.1		
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.		
PO 12.2	DTS/DPF 12.2		
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.		
PO 12.3	DTS/DPF 12.3		
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.		
PO 12.4	DTS/DPF 12.4		
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.		
PO 12.5	DTS/DPF 12.5		

Page 57 of 124 Printed on 12/07/2021

External materials and finishes are durable and age well to minimise Buildings utilise a combination of the following external materials and ongoing maintenance requirements. finishes: (a) masonry (b) natural stone pre-finished materials that minimise staining, discolouring or deterioration. PO 12.6 DTS/DPF 12.6 Street-facing building elevations are designed to provide attractive, high Building street frontages incorporate: quality and pedestrian-friendly street frontages. active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions. PO 12.7 DTS/DPF 12.7 Entrances to multi-storey buildings are safe, attractive, welcoming, Entrances to multi-storey buildings are: functional and contribute to streetscape character. (a) oriented towards the street clearly visible and easily identifiable from the street and vehicle parking areas designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses designed to provide shelter, a sense of personal address and transitional space around the entry located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors (f) designed to avoid the creation of potential areas of entrapment. PO 12.8 DTS/DPF 12.8 Building services, plant and mechanical equipment are screened from the None are applicable. public realm. Landscaping PO 13.1 DTS/DPF 13.1 Development facing a street provides a well landscaped area that contains Buildings provide a 4m by 4m deep soil space in front of the building that a deep soil space to accommodate a tree of a species and size adequate accommodates a medium to large tree, except where no building setback to provide shade, contribute to tree canopy targets and soften the from front property boundaries is desired. appearance of buildings. PO 13.2 DTS/DPF 13.2 Deep soil zones are provided to retain existing vegetation or provide areas Multi-storey development provides deep soil zones and incorporates trees that can accommodate new deep root vegetation, including tall trees with at not less than the following rates, except in a location or zone where full large canopies to provide shade and soften the appearance of multi-storey site coverage is desired. buildings. Minimum deep Site area **Minimum** Tree / deep soil soil area dimension zones 1.5m 1 small tree / 10 $<300 \text{ m}^2$ $10 \, \text{m}^2$ m^2 7% site area 3m 1 medium tree / 300-1500 m² 30 m^2 >1500 m² 7% site area 6m 1 large or medium tree /

Page 58 of 124 Printed on 12/07/2021

 60 m^2

Policy24 - Eriquily	11		
	Tree size and site area definitions		
	Small tree	4-6m mature height and 2-4m canopy spread	
	Medium tree	6-12m mature height and 4-8m canopy spread	
	Large tree	12m mature height and >8m canopy spread	
	Site area	The total area for development site, not average area per dwelling	
PO 13.3	DTS/DPF 13.3		
Deep soil zones with access to natural light are provided to assist in maintaining vegetation health.	None are applicable.		
PO 13.4	DTS/DPF 13.4		
Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height.	Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.		
Enviror	nmental		
PO 14.1	DTS/DPF 14.1		
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicable.		
PO 14.2	DTS/DPF 14.2		
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.			
PO 14.3	DTS/DPF 14.3		
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:	None are applicable.		
(a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street			
(b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas			
(c) the placement of buildings and use of setbacks to deflect the wind at ground level			
(d) avoiding tall shear elevations that create windy conditions at street level.			
Car P	arking		
PO 15.1	DTS/DPF 15.1		
Multi-level vehicle parking structures are designed to contribute to active	Multi-level vehicle	parking structures within buildings:	
street frontages and complement neighbouring buildings.	 (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing alo major street frontages that are sufficiently enclosed and detail to complement adjacent buildings. 		
PO 15.2	DTS/DPF 15.2		

Page 59 of 124 Printed on 12/07/2021

Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.

None are applicable.

Overlooking/Visual Privacy

PO 16.1

Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:

- (a) appropriate site layout and building orientation
- (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight
- (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms
- screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity.

DTS/DPF 16.1

None are applicable.

All residential development

Front elevations and passive surveillance

PO 17.1

Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.

DTS/DPF 17.1

Each dwelling with a frontage to a public street:

- (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m
- (b) has an aggregate window area of at least 2m² facing the primary street.

PO 17.2

Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.

DTS/DPF 17.2

Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.

Outlook and Amenity

PO 18.1

Living rooms have an external outlook to provide a high standard of amenity for occupants.

DTS/DPF 18.1

A living room of a dwelling incorporates a window with an external outlook of the street frontage, private open space, public open space, or waterfront areas.

PO 18.2

Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.

DTS/DPF 18.2

None are applicable.

Ancillary Development

PO 19.1

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties. DTS/DPF 19.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - in front of any part of the building line of the dwelling to which it is ancillary

or

- within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - (i) is set back at least 5.5m from the boundary of the

Page 60 of 124 Printed on 12/07/2021

primary street

- when facing a primary street or secondary street, has a total door / opening not exceeding:
 - for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
 - for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width
- if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary
 - the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- have a roof height where no part of the roof is more than 5m above the natural ground level
- if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

the amount of existing soft landscaping prior to the development occurring.

PO 19.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.

DTS/DPF 19.2

Ancillary buildings and structures do not result in:

- less private open space than specified in Design in Urban Areas Table 1 - Private Open Space
- less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

DTS/DPF 19.3

Fixed plant and equipment in the form of pumps and/or filtration systems | The pump and/or filtration system is ancillary to a dwelling erected on the

Printed on 12/07/2021 Page 61 of 124

Policy24 - Enquiry	
for a swimming pool or spa positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	same site and is: (a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.
Residential Devel	opment - Low Rise
External a	ppearance
PO 20.1	DTS/DPF 20.1
Garaging is designed to not detract from the streetscape or appearance	Garages and carports facing a street:
of a dwelling.	(a) are situated so that no part of the garage or carport will be in front of any part of the building line of the dwelling
	(b) are set back at least 5.5m from the boundary of the primary street
	(c) have a garage door / opening width not exceeding 7m
	(d) have a garage door / opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street.
PO 20.2	DTS/DPF 20.2
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: (a) a minimum of 30% of the building wall is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building wall (c) a balcony projects from the building wall (d) a verandah projects at least 1m from the building wall (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm (g) a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish.
PO 20.3	DTS/DPF 20.3
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable
Private C	pen Space
PO 21.1	DTS/DPF 21.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
PO 21.2	DTS/DPF 21.2
Private open space is positioned to provide convenient access from internal living areas.	Private open space is directly accessible from a habitable room.
Lands	scaping

Page 62 of 124 Printed on 12/07/2021

PO 22.1

Soft landscaping is incorporated into development to:

- (a) minimise heat absorption and reflection
- (b) contribute shade and shelter
- (c) provide for stormwater infiltration and biodiversity
- (d) enhance the appearance of land and streetscapes.

DTS/DPF 22.1

Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b):

(a) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
>200-450	20%
>450	25%

(b) at least 30% of any land between the primary street boundary and the primary building line.

Car parking, access and manoeuvrability

PO 23.1

Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.

DTS/DPF 23.1

Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):

- (a) single width car parking spaces:
 - (i) a minimum length of 5.4m per space
 - (ii) a minimum width of 3.0m
 - (iii) a minimum garage door width of 2.4m
- (b) double width car parking spaces (side by side):
 - (i) a minimum length of 5.4m
 - (ii) a minimum width of 5.4m
 - (iii) minimum garage door width of 2.4m per space.

PO 23.2

Uncovered car parking space are of dimensions to be functional, accessible and convenient.

DTS/DPF 23.2

Uncovered car parking spaces have:

- (a) a minimum length of 5.4m
- (b) a minimum width of 2.4m
- (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.

PO 23.3

Driveways and access points are located and designed to facilitate safe access and egress while maximising land available for street tree planting, domestic waste collection, landscaped street frontages and on-street parking.

DTS/DPF 23.3

Driveways and access points satisfy (a) or (b):

- (a) sites with a frontage to a public road of 10m or less, have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site
- (b) sites with a frontage to a public road greater than 10m:
 - have a maximum width of 5m measured at the property boundary and are the only access point provided on the site:
 - (ii) have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m.

PO 23.4

DTS/DPF 23.4

Page 63 of 124 Printed on 12/07/2021

Vehicle access is safe, convenient, minimises interruption to the operation Vehicle access to designated car parking spaces satisfy (a) or (b): of public roads and does not interfere with street infrastructure or street is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance 6m or more from the tangent point of an intersection of 2 or more roads outside of the marked lines or infrastructure dedicating a pedestrian crossing. PO 23.5 DTS/DPF 23.5 Driveways are designed to enable safe and convenient vehicle movements Driveways are designed and sited so that: from the public road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site PO 23.6 DTS/DPF 23.6 Driveways and access points are designed and distributed to optimise the Where on-street parking is available abutting the site's street frontage, onprovision of on-street visitor parking. street parking is retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage DTS/DPF 24.1 PO 24 1 Provision is made for the convenient storage of waste bins in a location Where dwellings abut both side boundaries a waste bin storage area is screened from public view. provided behind the building line of each dwelling that: has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. Design of Transportable Buildings PO 25 1 DTS/DPF 25.1 The sub-floor space beneath transportable buildings is enclosed to give Buildings satisfy (a) or (b): the appearance of a permanent structure.

Page 64 of 124 Printed on 12/07/2021

(a)

(b)

are not transportable

the sub-floor space between the building and ground level is clad

in a material and finish consistent with the building.

Residential Development - Medium and	High Rise (including serviced apartments)
Outlook and	Visual Privacy
PO 26.1	DTS/DPF 26.1
Ground level dwellings have a satisfactory short range visual outlook to public, communal or private open space.	Buildings: (a) provide a habitable room at ground or first level with a window facing toward the street (b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage.
PO 26.2	DTS/DPF 26.2
The visual privacy of ground level dwellings within multi-level buildings is protected.	The finished floor level of ground level dwellings in multi-storey developments is raised by up to 1.2m.
Private O	pen Space
PO 27.1	DTS/DPF 27.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
Residential amenity	n multi-level buildings
PO 28.1	DTS/DPF 28.1
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.	Habitable rooms and balconies of independent dwellings and accommodation are separated by at least 6m from one another where there is a direct line of sight between them and 3m or more from a side or rear property boundary.
PO 28.2	DTS/DPF 28.2
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to: (a) respond to daylight, wind, and acoustic conditions to maximise comfort and provide visual privacy (b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor areas.	Balconies utilise one or a combination of the following design elements: (a) sun screens (b) pergolas (c) louvres (d) green facades (e) openable walls.
PO 28.3	DTS/DPF 28.3
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.
PO 28.4	DTS/DPF 28.4
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling: (a) studio: not less than 6m ³ (b) 1 bedroom dwelling / apartment: not less than 8m ³ (c) 2 bedroom dwelling / apartment: not less than 10m ³ (d) 3+ bedroom dwelling / apartment: not less than 12m ³ .
PO 28.5	DTS/DPF 28.5
Dwellings that use light wells for access to daylight, outlook and ventilation for habitable rooms, are designed to ensure a reasonable living amenity is provided.	Light wells: (a) are not used as the primary source of outlook for living rooms (b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms (c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.

Page 65 of 124 Printed on 12/07/2021

Policy24 - Enquiry		
PO 28.6	DTS/DPF 28.6	
Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	None are applicable.	
PO 28.7	DTS/DPF 28.7	
Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.	None are applicable.	
Dwelling C	onfiguration	
PO 29.1	DTS/DPF 29.1	
Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	Buildings containing in excess of 10 of the following:	dwellings provide at least one of each
	(a) studio (where there is no so (b) 1 bedroom dwelling / apart 50m ²	eparate bedroom) ment with a floor area of at least
	(c) 2 bedroom dwelling / apart 65m ²	ment with a floor area of at least
		rtment with a floor area of at least er 3 bedrooms provides an additional bedroom.
PO 29.2	DTS/DPF 29.2	
Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	None are applicable.	
Comm	on Areas	
PO 30.1	DTS/DPF 30.1	
The size of lifts, lobbies and corridors is sufficient to accommodate	Common corridor or circulation are	00.
movement of bicycles, strollers, mobility aids and visitor waiting areas.	(a) have a minimum ceiling hei (b) provide access to no more	ght of 2.7m than 8 dwellings nat apartment entries where the
Group Dwellings, Residential Flat Br	uildings and Battle axe Development	
Am	enity	
P0 31.1	DTS/DPF 31.1	
Dwellings are of a suitable size to provide a high standard of amenity for occupants.	Dwellings have a minimum internal following table:	floor area in accordance with the
	Number of bedrooms	Minimum internal floor area
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom
PO 31.2	DTS/DPF 31.2	
	D13/DFF 31.2	

Page 66 of 124 Printed on 12/07/2021

outlook and privacy of occupants and neighbours. PO 31.3	
PO 31.3	-
	DTS/DPF 31.3
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.
PO 31.4	DTS/DPF 31.4
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in the form of a battle-axe arrangement.
Commu	nal Open Space
PO 32.1	DTS/DPF 32.1
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 32.2	DTS/DPF 32.2
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 32.3	DTS/DPF 32.3
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 32.4	DTS/DPF 32.4
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 32.5	DTS/DPF 32.5
Communal open space is designed and sited to:	None are applicable.
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Car parking, acce	ess and manoeuvrability
PO 33.1	DTS/DPF 33.1
Driveways and access points are designed and distributed to optimise th provision of on-street visitor parking.	e Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	(a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 33.2	DTS/DPF 33.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 33.3	DTS/DPF 33.3
Residential driveways that service more than one dwelling are designed t allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:
	(a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings:

Page 67 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
	 (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
D0 22 4	DTO/DDF 22.4
PO 33.4 Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	DTS/DPF 33.4 Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 33.5	DTS/DPF 33.5
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Soft lan	dscaping
PO 34.1	DTS/DPF 34.1
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.
PO 34.2	DTS/DPF 34.2
Battle-axe or common driveways incorporate landscaping and	Battle-axe or common driveways satisfy (a) and (b):
permeability to improve appearance and assist in stormwater management.	are constructed of a minimum of 50% permeable or porous material where the driveway is located directly adjacent the side or rear
	boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Site Facilities ,	Waste Storage
Site Facilities ,	Waste Storage DTS/DPF 35.1
PO 35.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature	DTS/DPF 35.1
PO 35.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	DTS/DPF 35.1 None are applicable.
PO 35.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 35.2	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Provision is made for suitable external clothes drying facilities.	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable.
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 35.2 Provision is made for suitable external clothes drying facilities. PO 35.3 Provision is made for suitable household waste and recyclable material	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable. DTS/DPF 35.3
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 35.2 Provision is made for suitable external clothes drying facilities. Po 35.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable. DTS/DPF 35.3
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 35.2 Provision is made for suitable external clothes drying facilities. Po 35.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point.	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable. DTS/DPF 35.3 None are applicable.
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. P0 35.2 Provision is made for suitable external clothes drying facilities. P0 35.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. P0 35.4 Waste and recyclable material storage areas are located away from	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable. DTS/DPF 35.3 None are applicable. DTS/DPF 35.4 Dedicated waste and recyclable material storage areas are located at
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 35.2 Provision is made for suitable external clothes drying facilities. PO 35.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. PO 35.4 Waste and recyclable material storage areas are located away from dwellings.	DTS/DPF 35.1 None are applicable. DTS/DPF 35.2 None are applicable. DTS/DPF 35.3 None are applicable. DTS/DPF 35.4 Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.

Page 68 of 124 Printed on 12/07/2021

Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Water sensitiv	e urban design
P0 36.1	DTS/DPF 36.1
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
PO 36.2	DTS/DPF 36.2
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Supported Accommodation	on and retirement facilities
Siting, Configur	ation and Design
PO 37.1	DTS/DPF 37.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
PO 37.2	DTS/DPF 37.2
Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	None are applicable.
Movement	and Assess
	and Access
PO 38.1	DTS/DPF 38.1
PO 38.1 Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places	DTS/DPF 38.1
PO 38.1 Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing	DTS/DPF 38.1
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	DTS/DPF 38.1
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	DTS/DPF 38.1 None are applicable.
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	None are applicable. Open Space
Po 38.1 Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal Po 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents	DTS/DPF 38.1 None are applicable. Open Space DTS/DPF 39.1
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	DTS/DPF 38.1 None are applicable. Open Space DTS/DPF 39.1 None are applicable.
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity	DTS/DPF 38.1 None are applicable. Open Space DTS/DPF 39.1 None are applicable. DTS/DPF 39.2
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal P0 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. P0 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable. Open Space DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable.
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to cater for	DTS/DPF 39.1 None are applicable. Open Space DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3

Page 69 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 39.5	DTS/DPF 39.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 39.6	DTS/DPF 39.6
Communal open space is designed and sited to:	None are applicable.
 in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings 	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities	/ Waste Storage
PO 40.1	DTS/DPF 40.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.
PO 40.2	DTS/DPF 40.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 40.3	DTS/DPF 40.3
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 40.4	DTS/DPF 40.4
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.
PO 40.5	DTS/DPF 40.5
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 406	DTS/DPF 40.6
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.
PO 40.7	DTS/DPF 40.7
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.
Student Acc	commodation
PO 41.1	DTS/DPF 41.1
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.	Student accommodation provides: (a) a range of living options to meet a variety of accommodation needs, such as one-bedroom, two-bedroom and disability access units (b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students

Page 70 of 124 Printed on 12/07/2021

	 (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (v) bicycle parking at the rate of one space for every 2 students.
PO 41.2	DTS/DPF 41.2
Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	None are applicable.
All non-resider	I tial development
Water Sen	sitive Design
PO 42.1	DTS/DPF 42.1
Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.
PO 42.2	DTS/DPF 42.2
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.
PO 42.3	DTS/DPF 42.3
Development includes stormwater management systems to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems.	None are applicable.
Wash-down and Wast	Loading and Unloading
PO 43.1	DTS/DPF 43.1
	DTS/DPF 43.1 None are applicable.
PO 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas	
Po 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external	
Po 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater	
Po 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of	
Po 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme	
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or (ii) a holding tank and its subsequent removal off-site on a regular basis.	
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or (ii) a holding tank and its subsequent removal off-site on a regular basis.	None are applicable.
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or (ii) a holding tank and its subsequent removal off-site on a regular basis.	None are applicable.
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or (ii) a holding tank and its subsequent removal off-site on a regular basis.	None are applicable. Revelopment e and Access

Page 71 of 124 Printed on 12/07/2021

Policy24 - Enquiry

- the primary street can support access by emergency and regular service vehicles (such as waste collection)
- it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site	Minimum Rate
	Configuration	
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which incorporate	Dwellings at ground level:	15m ² / minimum dimension 3m
above ground level dwellings	Dwellings above ground level:	
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m
	One bedroom dwelling	8m² / minimum dimension 2.1m
	Two bedroom dwelling	11m ² / minimum dimension 2.4m
	Three + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

	Desired Outcome
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 72 of 124 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Si	ting
PO 1.1	DTS/DPF 1.1
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).
P0 1.3	DTS/DPF 1.3
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.
PO 1.4	DTS/DPF 1.4
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from a reserve gazetted under the National Parks and Wildlife Act 1972 and/or Wilderness Protection Act 1992.
Water P	rotection
PO 2.1	DTS/DPF 2.1
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.
PO 2.2	DTS/DPF 2.2
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	(a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).
Fire Mar	l nagement
PO 3.1 Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	DTS/DPF 3.1 Commercial forestry plantations provide: (a) 7m or more wide external boundary firebreaks for plantations of 40ha or less (b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha (c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.
P0 3.2	DTS/DPF 3.2
Commercial forestry plantations incorporate appropriate fire management access tracks.	(a) are incorporated within all firebreaks (b) are 7m or more wide with a vertical clearance of 4m or more (c) are aligned to provide straight through access at junctions, or if they are a no through access track are appropriately signposted

Page 73 of 124 Printed on 12/07/2021

	and provide suitable turnaround areas for fire-fighting vehicles (d) partition the plantation into units of 40ha or less in area.
Powe	r-line Clearances
PO 4.1	DTS/DPF 4.1
Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.	Commercial forestry plantations incorporating trees with an expected mature height of greater than 6m meet the clearance requirements listed in the following table:
	Voltage of transmission line Tower or Pole Minimum horizontal clearance distance between plantings and transmission lines
	500 kV Tower 38m
	275 kV Tower 25m
	132 kV Tower 30m
	132 kV Pole 20m
	66 kV Pole 20m
	Less than 66 kV Pole 20m

Housing Renewal

Assessment Provisions (AP)

	Desired Outcome
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
P0 1.1 Residential development provides a range of housing choices.	DTS/DPF 1.1 Development comprises one or more of the following: (a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.
PO 1.2	DTS/DPF 1.2

Page 74 of 124 Printed on 12/07/2021

Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.
Buildir	ig Height
P0 2.1	DTS/DPF 2.1
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).
P0 2.2	DTS/DPF 2.2
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.
Primary St	reet Setback
P0 3.1	DTS/DPF 3.1
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.
Secondary :	Street Setback
P0 4.1	DTS/DPF 4.1
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.
Bound	I ary Walls
P0 5.1	DTS/DPF 5.1
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):
	(a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height (b) do not:
	(i) exceed 3.2m in height from the lower of the natural or finished ground level
	(ii) exceed 11.5m in length (iii) when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary
	(iv) encroach within 3 metres of any other existing or proposed boundary walls on the subject land.
P0 5.2	DTS/DPF 5.2
Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character.	Dwellings in a semi-detached or row arrangement are set back 900mm or more from side boundaries shared with allotments outside the development site, except for a carport or garage.
Side Boun	dary Setback
P0 6.1	DTS/DPF 6.1
Buildings are set back from side boundaries to provide:	Other than walls located on a side boundary, buildings are set back from
 (a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours. 	(a) at least 900mm where the wall height is up to 3m (b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m

Page 75 of 124 Printed on 12/07/2021

(c)

at least 1.9m plus 1/3 of the wall height above 3m for walls

facing a southern side boundary.

Rear Bound	lary Setback
P0 7.1	DTS/DPF 7.1
Buildings are set back from rear boundaries to provide:	Dwellings are set back from the rear boundary:
(a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation.	(a) 3m or more for the first building level (b) 5m or more for any subsequent building level.
Buildings ele	vation design
PO 8.1	DTS/DPF 8.1
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.
PO 8.2	DTS/DPF 8.2
Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street
PO 8.3	DTS/DPF 8.3
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.
PO 8.4	DTS/DPF 8.4
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.
PO 8.5	DTS/DPF 8.5
Entrances to multi-storey buildings are:	None are applicable.
(a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure.	
Outlook at	nd amenity
PO 9.1	DTS/DPF 9.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outlook towards the street frontage or private open space.
PO 9.2	DTS/DPF 9.2

Page 76 of 124 Printed on 12/07/2021

residential uses.

Bedrooms are separated or shielded from active communal recreation None are applicable. areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. Private Open Space PO 10.1 DTS/DPF 10.1 Dwellings are provided with suitable sized areas of usable private open Private open space is provided in accordance with the following table: space to meet the needs of occupants. **Dwelling Type Dwelling / Site Minimum Rate** Configuration Dwelling (at ground Total area: 24m² located level) behind the building line Minimum adjacent to a living room: 16m² with a minimum dimension 3m Dwelling (above 4m² / minimum Studio ground level) dimension 1.8m 8m² / minimum One bedroom dwelling dimension 2.1m 11m² / minimum Two bedroom dimension 2.4m dwelling 15 m² / minimum Three + bedroom dimension 2 6m dwelling PO 10.2 DTS/DPF 10.2 Private open space positioned to provide convenient access from internal At least 50% of the required area of private open space is accessible from living areas. a habitable room. DTS/DPF 10.3 PO 10.3 Private open space is positioned and designed to: None are applicable. provide useable outdoor space that suits the needs of occupants; (b) take advantage of desirable orientation and vistas; and (c) adequately define public and private space. Visual privacy PO 11.1 DTS/DPF 11.1 Development mitigates direct overlooking from upper level windows to Upper level windows facing side or rear boundaries shared with another habitable rooms and private open spaces of adjoining residential uses. residential allotment/site satisfy one of the following: are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm (b) have sill heights greater than or equal to 1.5m above finished floor level incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface $\,$ and sited adjacent to any part of the window less than 1.5m above the finished floor. DTS/DPF 11.2 Development mitigates direct overlooking from upper level balconies and One of the following is satisfied: terraces to habitable rooms and private open space of adjoining

Page 77 of 124 Printed on 12/07/2021

the longest side of the balcony or terrace will face a public road,

public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases Landscaping PO 12.1 DTS/DPF 12.1 Residential development incorporates pervious areas for soft landscaping Soft landscaping is incorporated into development to: with a minimum dimension of 700mm provided in accordance with (a) and (a) minimise heat absorption and reflection (b): (b) maximise shade and shelter (a) a total area as determined by the following table: (c) maximise stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Dwelling site area (or in the case of residential flat Minimum building or group dwelling(s), average site area) (m2) percentage of site <150 10% <200 15% 200-450 20% >450 25% (b) at least 30% of land between the road boundary and the building Water Sensitive Design PO 13.1 DTS/DPF 13.1 Residential development is designed to capture and use stormwater to: None are applicable. (a) maximise efficient use of water resources (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, predevelopment conditions. Car Parking PO 14.1 DTS/DPF 14.1 On-site car parking is provided to meet the anticipated demand of On-site car parking is provided at the following rates per dwelling: residents, with less on-site parking in areas in close proximity to public 2 or fewer bedrooms - 1 car parking space transport. (b) 3 or more bedrooms - 2 car parking spaces. PO 14.2 DTS/DPF 14.2 Enclosed car parking spaces are of dimensions to be functional, Residential parking spaces enclosed by fencing, walls or other accessible and convenient. obstructions with the following internal dimensions (separate from any waste storage area): single parking spaces: (i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m minimum garage door width of 2.4m per space.

Page 78 of 124 Printed on 12/07/2021

PO 14.3	DTS/DPF 14.3
Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
PO 14.4	DTS/DPF 14.4
Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.	Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.
PO 14.5	DTS/DPF 14.5
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.
Oversh	adowing
P0 15.1	DTS/DPF 15.1
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.
W	aste
PO 16.1 Provision is made for the convenient storage of waste bins in a location screened from public view. PO 16.2 Residential flat buildings provide a dedicated area for the on-site storage of waste which is: (a) easily and safely accessible for residents and for collection	DTS/DPF 16.1 A waste bin storage area is provided behind the primary building line that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. DTS/DPF 16.2 None are applicable.
vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection. Vehicle	e Access
P0 17.1	DTS/DPF 17.1
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	None are applicable.
P0 17.2	DTS/DPF 17.2
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole,
	(1) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utili

Page 79 of 124 Printed on 12/07/2021

	infracturature unless consent is avertided from the const
	infrastructure unless consent is provided from the asset owner
	(ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance
	(iii) 6m or more from the tangent point of an intersection of 2 or more roads
	(iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 17.3	DTS/DPF 17.3
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that:
Thom the public road to on site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average
	(b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary.
	(c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.
PO 17.4	DTS/DPF 17.4
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	Minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	minimum car park length of 6m for an intermediate space located between two other parking spaces.
PO 17.5	DTS/DPF 17.5
Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 17.6	DTS/DPF 17.6
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre
PO 17.7	DTS/DPF 17.7
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Sto	rage
PO 18.1	DTS/DPF 18.1
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:
	(a) studio: not less than 6m ³

Page 80 of 124 Printed on 12/07/2021

(b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m3 (d) 3+ bedroom dwelling / apartment: not less than 12m³. Earthworks PO 19.1 DTS/DPF 19.1 Development, including any associated driveways and access tracks, The development does not involve: minimises the need for earthworks to limit disturbance to natural excavation exceeding a vertical height of 1m topography. (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height exceeding Service connections and infrastructure PO 20.1 DTS/DPF 20.1 Dwellings are provided with appropriate service connections and The site and building: infrastructure. have the ability to be connected to a permanent potable water have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011 (c) have the ability to be connected to electricity supply (d) have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes would not be contrary to the Regulations prescribed for the purposes of Section 86 of the Electricity Act 1996. Site contamination PO 21.1 DTS/DPF 21.1 Land that is suitable for sensitive land uses to provide a safe environment. Development satisfies (a), (b), (c) or (d): does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use involves a change in the use of land to a more sensitive use on land at which site contamination does not exist (as demonstrated in a site contamination declaration form) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that site contamination does not exist (or no longer exists) at the land

and

no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site

remediation)

development)

or

the land is suitable for the proposed use or range of uses (without the need for any further

where remediation is, or remains, necessary for

remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the

the proposed use (or range of uses),

Printed on 12/07/2021 Page 81 of 124

contamination audit report (as demonstrated in a <u>site</u> contamination declaration form).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Desired Outcome	
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
General			
PO 1.1	DTS/DPF 1.1		
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.		
Visual	Amenity		
PO 2.1	DTS/DPF 2.1		
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by: (a) utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	None are applicable.		
P0 2.2	DTS/DPF 2.2		
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.		
PO 2.3	DTS/DPF 2.3		
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.		

Page 82 of 124 Printed on 12/07/2021

Policy24 - Enquiry			
Rehabilitation			
PO 3.1	DTS/DPF 3.1		
Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upon decommissioning of areas used for renewable energy facilities and transmission corridors.	None are applicable.		
Hazard M	I anagement		
PO 4.1	DTS/DPF 4.1		
Infrastructure and renewable energy facilities and ancillary development located and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	None are applicable.		
PO 4.2	DTS/DPF 4.2		
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.		
PO 4.3	DTS/DPF 4.3		
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.		
Electricity Infrastructure at	nd Battery Storage Facilities		
PO 5.1	DTS/DPF 5.1		
Electricity infrastructure is located to minimise visual impacts through techniques including: (a) siting utilities and services:	None are applicable.		
P0 5.2	DTS/DPF 5.2		
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.		
P0 5.3	DTS/DPF 5.3		
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.		
Telecommunication Facilities			
PO 6.1	DTS/DPF 6.1		
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.		
PO 6.2	DTS/DPF 6.2		
Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.		

Page 83 of 124 Printed on 12/07/2021

P0 6.3	DTS/DPF 6.3
Telecommunications facilities, particularly towers/monopoles, are located and sized to mitigate visual impacts by the following methods:	None are applicable.
(a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose	
or all of the following:	
(b) using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services	
using materials and finishes that complement the environment screening using landscaping and vegetation, particularly for equipment shelters and huts.	
Renewable E	nergy Facilities
P07.1	DTS/DPF 7.1
Renewable energy facilities are located as close as practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure.	None are applicable.
Renewable Energy	Facilities (Wind Farm)
PO 8.1	DTS/DPF 8.1
Visual impact of wind turbine generators on the amenity of residential and tourist development is reduced through appropriate separation.	(a) set back at least 2000m from the base of a turbine to any of the following zones: (i) Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone (iv) Rural Neighbourhood Zone with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation
PO 8.2	DTS/DPF 8.2
The visual impact of wind turbine generators on natural landscapes is managed by:	None are applicable.
designing wind turbine generators to be uniform in colour, size and shape coordinating blade rotation and direction mounting wind turbine generators on tubular towers as opposed to lattice towers.	
PO 8.3	DTS/DPF 8.3
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applicable.
PO 8.4	DTS/DPF 8.4
Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.
P0 8.5	DTS/DPF 8.5
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing	None are applicable.

Page 84 of 124 Printed on 12/07/2021

Policy24 - Enquiry					
strobes.					
Renewable Energy F	acilities (Solar Power	·)			
PO 9.1	DTS/DPF 9.1				
Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applic	able.			
PO 9.2	DTS/DPF 9.2				
Ground mounted solar power facilities allow for movement of wildlife by: (a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.	None are applic	able.			
PO 9.3	DTS/DPF 9.3				
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership. Ground mounted solar power facilities are set back from I conservation areas and relevant zones in accordance with criteria:					
	Generation Capacity	Approximate size of array	Setback from adjoining land boundary	Setback from conservation areas	Setback from Township, Rural Settlement, Rural Neighbourhood and Rural Living Zones ¹
	50MW>	80ha+	30m	500m	2km
	10MW<50MW	16ha-<80ha	25m	500m	1.5km
	5MW<10MW	8ha to <16ha	20m	500m	1km
	1MW<5MW	1.6ha to <8ha	15m	500m	500m
	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes: 1. Does not app power facility is				mounted solar
PO 9.4	DTS/DPF 9.4		·		
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applic	able.			
Hydropower / Pumper	d Hydropower Faciliti	es			
PO 10.1 Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	DTS/DPF 10.1 None are application	able.			
	 				

Page 85 of 124 Printed on 12/07/2021

Policy24 - Enquiry			
P0 10.2	DTS/DPF 10.2		
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applicable.		
PO 10.3	DTS/DPF 10.3		
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applicable.		
Wate	Supply		
P0 11.1	DTS/DPF 11.1		
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.		
P011.2	DTS/DPF 11.2		
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.	A dwelling is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the development. Where this is not available it is serviced by a rainwater tank or tanks capable of holding at least 50,000 litres of water which is: (a) exclusively for domestic use (b) connected to the roof drainage system of the dwelling.		
Wastewa	ter Services		
PO 12.1	DTS/DPF 12.1		
Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following:	Development is connected, or will be connected, to an approved common wastewater disposal service with the capacity to meet the requirements of the development. Where this is not available it is instead capable of being serviced by an on-site waste water treatment system in accordance with the following:		
(a) it is wholly located and contained within the allotment of the development it will service	(a) the system is wholly located and contained within the allotment of development it will service; and		
 (b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm. 	(b) the system will comply with the requirements of the South Australian Public Health Act 2011.		
environmentai narm.			
PO 12.2 Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	DTS/DPF 12.2 Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.		
Tempora	Try Facilities		
PO 13.1	DTS/DPF 13.1		
In rural and remote locations, development that is likely to generate significant waste material during construction, including packaging waste, makes provision for a temporary on-site waste storage enclosure to minimise the incidence of wind-blown litter.	A waste collection and disposal service is used to dispose of the volume of waste at the rate it is generated.		
PO 13.2	DTS/DPF 13.2		
Temporary facilities to support the establishment of renewable energy facilities (including borrow pits, concrete batching plants, laydown,	None are applicable.		

Page 86 of 124 Printed on 12/07/2021

storage, access roads and worker amenity areas) are sited and operated	
to minimise environmental impact.	

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

Desired Outcome		
Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
Siting and Design			
PO 1.1	DTS/DPF 1.1		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.		
PO 1.3	DTS/DPF 1.3		
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.		
P0 1.4	DTS/DPF 1.4		
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.		
P0 1.5	DTS/DPF 1.5		
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.		
Waste			
PO 2.1	DTS/DPF 2.1		
Storage of manure, used litter and other wastes (other than waste water lagoons) is sited, designed, constructed and managed to:	None are applicable.		
(a) avoid attracting and harbouring vermin (b) avoid polluting water resources (c) be located outside 1% AEP flood event areas.			

Page 87 of 124 Printed on 12/07/2021

Soil and Water Protection			
PO 3.1	DTS/DPF 3.1		
To avoid environmental harm and adverse effects on water resources, intensive animal husbandry operations are appropriately set back from: (a) public water supply reservoirs (b) major watercourses (third order or higher stream) (c) any other watercourse, bore or well used for domestic or stock water supplies.	Intensive animal husbandry operations are set back: (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.		
PO 3.2	DTS/DPF 3.2		
Intensive animal husbandry operations and dairies incorporate appropriately designed effluent and run-off facilities that: (a) have sufficient capacity to hold effluent and runoff from the operations on site (b) ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.	None are applicable.		

Interface between Land Uses

Assessment Provisions (AP)

Desired Outcome			
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
General Land Us	se Compatibility		
P0 1.1	DTS/DPF 1.1		
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.	None are applicable.		
Hours of	Operation		
PO 2.1	DTS/DPF 2.1		
Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an	Development operating within the following hours:		
adjacent zone primarily for sensitive receivers through its hours of operation having regard to:	Class of Development Hours of operation		
(a) the nature of the development (b) measures to mitigate off-site impacts	Consulting room 7am to 9pm, Monday to Friday		
(c) the extent to which the development is desired in the zone (d) measures that might be taken in an adjacent zone primarily for	8am to 5pm, Saturday		

Page 88 of 124 Printed on 12/07/2021

sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land.	Office 7am to 9pm, Monday to Friday 8am to 5pm, Saturday		
	Shop, other than any one or combination of the following: (a) restaurant (b) cellar door in the Productive Rural Landscape Zone, Rural Zone or Rural Horticulture Zone		
Oversh	adowing		
P0 3.1	DTS/DPF 3.1		
Overshadowing of habitable room windows of adjacent residential land uses in: a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June.		
P0 3.2	DTS/DPF 3.2		
Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in: a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following: a. for ground level private open space, the smaller of the following: i. half the existing ground level open space or ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m) b. for ground level communal open space, at least half of the existing ground level open space.		
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account: (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed.	None are applicable.		
P0 3.4 Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	DTS/DPF 3.4 None are applicable.		
Activities Generatin	ng Noise or Vibration		
PO 4.1 Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	DTS/DPF 4.1 Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.		
P0 4.2	DTS/DPF 4.2		
Areas for the on-site manoeuvring of service and delivery vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited	None are applicable.		

Page 89 of 124 Printed on 12/07/2021

to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including: (a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4 3 Fixed plant and equipment in the form of pumps and/or filtration systems The pump and/or filtration system ancillary to a dwelling erected on the for a swimming pool or spa are positioned and/or housed to not cause same site is: unreasonable noise nuisance to adjacent sensitive receivers (or lawfully enclosed in a solid acoustic structure located at least 5m from approved sensitive receivers). the nearest habitable room located on an adjoining allotment (h) located at least 12m from the nearest habitable room located on an adjoining allotment. PO 4.4 DTS/DPF 4.4 External noise into bedrooms is minimised by separating or shielding Adjacent land is used for residential purposes. these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment. PO 4.5 DTS/DPF 4.5 Outdoor areas associated with licensed premises (such as beer gardens None are applicable. or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers). PO 4.6 DTS/DPF 4.6 Development incorporating music achieves suitable acoustic amenity Development incorporating music includes noise attenuation measures when measured at the boundary of an adjacent sensitive receiver (or that will achieve the following noise levels: lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers. Assessment Incation Music noise level Externally at the nearest Less than 8dB above the level of background noise (L_{90,15min}) in any existing or envisaged noise sensitive location octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB) Air Quality PO 5.1 DTS/DPF 5.1 Development with the potential to emit harmful or nuisance-generating air None are applicable. pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers. PO 5.2 DTS/DPF 5.2 Development that includes chimneys or exhaust flues (including cafes, None are applicable. restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:

Page 90 of 124 Printed on 12/07/2021

Policy24 - Eriquily	
incorporating appropriate treatment technology before exhaust emissions are released locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.	
Ligh	I t Spill
P0 6.1	DTS/DPF 6.1
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.
P0 6.2	DTS/DPF 6.2
External lighting is not hazardous to motorists and cyclists.	None are applicable.
Solar Reflec	ctivity / Glare
PO 7.1	DTS/DPF 7.1
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.
Electrical I	nterference
PO 8.1	DTS/DPF 8.1
Development in rural and remote areas does not unreasonably diminish or result in the loss of existing communication services due to electrical interference.	The building or structure: (a) is no greater than 10m in height, measured from existing ground level or (b) is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable.
Interface with	Rural Activities
Po 9.1 Sensitive receivers are located and designed to mitigate impacts from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities.	DTS/DPF 9.1 None are applicable.
PO 9.2	DTS/DPF 9.2
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities.	None are applicable.
PO 9.3	DTS/DPF 9.3
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing land-based aquaculture activities and do not prejudice the continued operation of these activities.	Sensitive receivers are located at least 200m from the boundary of a site used for land-based aquaculture and associated components in other ownership.
P0 9.4	DTS/DPF 9.4
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing dairies including associated wastewater lagoons and liquid/solid waste storage and disposal facilities and do not prejudice the continued operation of these activities.	Sensitive receivers are sited at least 500m from the boundary of a site used for a dairy and associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities in other ownership.
P0 9.5	DTS/DPF 9.5
Sensitive receivers are located and designed to mitigate the potential impacts from lawfully existing facilities used for the handling,	Sensitive receivers are located away from the boundary of a site used for the handling, transportation and/or storage of bulk commodities in other

Page 91 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
transportation and storage of bulk commodities (recognising the potential for extended hours of operation) and do not prejudice the continued operation of these activities.	 (a) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility (b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.
PO 9.6 Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	DTS/DPF 9.6 None are applicable.
PO 9.7 Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	DTS/DPF 9.7 None are applicable.
Interface with Mines and Quar	ries (Rural and Remote Areas)
Po 10.1 Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	DTS/DPF 10.1 Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971</i> .

Land Division

Assessment Provisions (AP)

Desired Outcome		
DO 1	Land division:	
	 (a) creates allotments with the appropriate dimensions and shape for their intended use (b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure (c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features (d) facilitates solar access through allotment orientation (e) creates a compact urban form that supports active travel, walkability and the use of public transport (f) avoids areas of high natural hazard risk. 	

Satisfy Criteria / rformance Feature	
All land division	
Allotment configuration	

Page 92 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
P0 1.1	DTS/DPF 1.1
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b):
	(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.
PO 1.2	DTS/DPF 1.2
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.
Design a	nd Layout
PO 2.1	DTS/DPF 2.1
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.
PO 2.2	DTS/DPF 2.2
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.
PO 2.3	DTS/DPF 2.3
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.
PO 2.4	DTS/DPF 2.4
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.
PO 2.5	DTS/DPF 2.5
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.
PO 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.
P0 2.7	DTS/DPF 2.7
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.
PO 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads ar	nd Access
PO 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
PO 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3

Page 93 of 124 Printed on 12/07/2021

Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
P0 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
P0 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
PO 3.11	DTS/DPF 3.11
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
Infrasi	tructure
PO 4.1	DTS/DPF 4.1
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
PO 4.2	DTS/DPF 4.2
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment
	(b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
D0.1.1	DTS/DPF 4.4
PO 4.4	D13/DFF 4.4

Page 94 of 124 Printed on 12/07/2021

Policy24 - Eriquity	
is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	
P0 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	(Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.
Solar O	ientation
P0 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sens	l sitive Design
P0 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes	None are applicable.
stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	Troile die applicasie.
P07.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe I	Development
P0 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.
P0 8.2	DTS/DPF 8.2
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:
	(a) has a minimum width of 4m
	or
	(b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3	DTS/DPF 8.3
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
PO 8.4	DTS/DPF 8.4
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b):
	(a) are constructed of a minimum of 50% permeable or porous material
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension

Page 95 of 124 Printed on 12/07/2021

	of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
	on (20+ Allotments) Space
PO 9.1	DTS/DPF 9.1
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.
PO 9.2	DTS/DPF 9.2
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.
PO 9.3	DTS/DPF 9.3
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.
Water Sens	sitive Design
P0 10.1	DTS/DPF 10.1
Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
P0 10.2	DTS/DPF 10.2
Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
PO 10.3	DTS/DPF 10.3
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
Solar Or	ientation
P0 11.1	DTS/DPF 11.1
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.

Marinas and On-Water Structures

Assessment Provisions (AP)

Desired Outcome		
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.	

Page 96 of 124 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back: (a) 3km or more from upstream water supply pumping station take- off points (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmental Protection	
P0 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

Open Space and Recreation

Assessment Provisions (AP)

Desired Outcome		
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 97 of 124 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Landline	
PO 1.1	DTS/DPF 1.1
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
P0 1.2	DTS/DPF 1.2
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Design	and Siting
P0 2.1	DTS/DPF 2.1
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
P0 2.2	DTS/DPF 2.2
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
P0 2.3	DTS/DPF 2.3
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Pedestrians	s and Cyclists
P0 3.1	DTS/DPF 3.1
Open space incorporates:	None are applicable.
pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; safe crossing points where pedestrian routes intersect the road network; easily identified access points.	
Usa	ability
PO 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.
Safety a	nd Security
PO 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
PO 5.3	DTS/DPF 5.3
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to minimise potential entrapment.	None are applicable.
PO 5.5	DTS/DPF 5.5

Page 98 of 124 Printed on 12/07/2021

Policy24 - Enquiry	
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.
Sig	nage
PO 6.1	DTS/DPF 6.1
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.
Buildings ar	nd Structures
PO 7.1	DTS/DPF 7.1
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.
PO 7.2	DTS/DPF 7.2
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.
P07.3	DTS/DPF 7.3
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.
P0 7.4	DTS/DPF 7.4
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.
Lands	rcaping
PO 8.1	DTS/DPF 8.1
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.
PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.
 (a) along cyclist and pedestrian routes; (b) around picnic and barbecue areas; (c) in car parking areas. 	
PO 8.3	DTS/DPF 8.3
Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	None are applicable.
PO 8.4	DTS/DPF 8.4
Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	None are applicable.

Out of Activity Centre Development

Assessment Provisions (AP)

Page 99 of 124 Printed on 12/07/2021

Desired Outcome

The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1 Non-residential development outside Activity Centres of a scale and type that does not diminish the role of Activity Centres: (a) as primary locations for shopping, administrative, cultural, entertainment and community services (b) as a focus for regular social and business gatherings (c) in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	DTS/DPF 1.1 None are applicable.
Out-of-activity centre non-residential development complements Activity Centres through the provision of services and facilities: (a) that support the needs of local residents and workers, particularly in underserviced locations (b) at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	DTS/DPF 1.2 None are applicable.

Resource Extraction

Assessment Provisions (AP)

Desired Outcome	
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Deemed-to-Satisfy Criteria / Designated Performance Feature
nd Intensity
DTS/DPF 1.1
None are applicable.
DTS/DPF 1.2
None are applicable.
Quality

Page 100 of 124 Printed on 12/07/2021

Policy24 - Enquiry

PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
P0 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Site Contamination

Assessment Provisions (AP)

	Desired Outcome
DO 1	Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d): (a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form) (d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that- A. site contamination does not exist (or no longer exists) at the land or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)

Page 101 of 124 Printed on 12/07/2021

contamination audit report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

	Desired Outcome
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ge	eneral
PO 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.
 (a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature. 	
P01.2	DTS/DPF 1.2
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	None are applicable.
Caravan and	d Tourist Parks
P0 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
P0 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
P0 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.
P0 2.4	DTS/DPF 2.4
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.
P0 2.5	DTS/DPF 2.5
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.

Page 102 of 124 Printed on 12/07/2021

Policy24 - Enquiry [Po 2.6	DTS/DPF 2.6
Long-term occupation does not displace tourist accommodation, particularly in important tourist destinations such as coastal and riverine locations.	None are applicable.
Tourist accommodation in areas constituted	I under the National Parks and Wildlife Act 1972
PO 3.1	DTS/DPF 3.1
Tourist accommodation avoids delicate or environmentally sensitive areas such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	None are applicable.
PO 3.2	DTS/DPF 3.2
Tourist accommodation is sited and designed in a manner that is subservient to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.
PO 3.3	DTS/DPF 3.3
Tourist accommodation and recreational facilities, including associated access ways and ancillary structures, are located on cleared (other than where cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	None are applicable.
P0 3.4	DTS/DPF 3.4
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.
 (a) comprising a minimum of 10 accommodation units (b) clustering separated individual accommodation units (c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling. 	

Transport, Access and Parking

Assessment Provisions (AP)

	Desired Outcome
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Movement Systems	
P0 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.

Page 103 of 124 Printed on 12/07/2021

Policy24 - Enquiry		
PO 1.2	DTS/DPF 1.2	
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.	
P0 1.3	DTS/DPF 1.3	
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.	
P01.4	DTS/DPF 1.4	
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	esigned so that loading, unloading and turning ting the operation of and queuing on public	
Sigh	tlines	
PO 2.1	DTS/DPF 2.1	
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	nd pedestrians are maintained or	
PO 2.2	DTS/DPF 2.2	
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.	
Vehicle	Access	
PO 3.1	DTS/DPF 3.1	
Safe and convenient access minimises impact or interruption on the operation of public roads.	The access is: (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.	
P0 3.2	DTS/DPF 3.2	
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	ccess ramps ensures vehicles can None are applicable.	
P0 3.3	DTS/DPF 3.3	
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.	
P0 3.4	DTS/DPF 3.4	
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.	
PO 3.5	DTS/DPF 3.5	
Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner	

Page 104 of 124 Printed on 12/07/2021

Policy24 - Eriquii y	
	 (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance
	(iii) 6m or more from the tangent point of an intersection of 2 or more roads
	(iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 3.6	DTS/DPF 3.6
Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	(a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.
P0 3.7	DTS/DPF 3.7
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m
	(b) 70 km/h road - 90m
	(c) 60 km/h road - 70m
	(d) 50km/h or less road - 50m.
PO 3.8	DTS/DPF 3.8
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	None are applicable.
PO 3.9	DTS/DPF 3.9
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	None are applicable.
Access for Peop	le with Disabilities
PO 4.1	DTS/DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.
Vehicle Pa	rking Rates
P0 5.1	DTS/DPF 5.1
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as:	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car
(a) availability of on-street car parking	Parking Requirements
(b) shared use of other parking areas	(b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas
(c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared	(c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less
(d) the adaptive reuse of a State or Local Heritage Place.	the number of spaces offset by contribution to the fund.
Vehicle Pa	I rking Areas
PO 6.1	DTS/DPF 6.1
	1

Page 105 of 124 Printed on 12/07/2021

Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	Movement between vehicle parking areas within the site can occur without the need to use a public road.	
PO 6.2	DTS/DPF 6.2	
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.		
P0 6.3	DTS/DPF 6.3	
Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	None are applicable.	
PO 6.4	DTS/DPF 6.4	
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.	
PO 6.5	DTS/DPF 6.5	
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.	
PO 6.6	DTS/DPF 6.6	
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.	
PO 6.7	DTS/DPF 6.7	
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.	
Undercroft and Below Ground G	araging and Parking of Vehicles	
PO 7.1	DTS/DPF 7.1	
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.	
Internal Roads and Parking Areas in Resid	ential Parks and Caravan and Tourist Parks	
PO 8.1	DTS/DPF 8.1	
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.	
PO 8.2	DTS/DPF 8.2	
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.	
Bicycle Parking in	Designated Areas	
PO 9.1	DTS/DPF 9.1	
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.	
PO 9.2	DTS/DPF 9.2	
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.	
	 	

Page 106 of 124 Printed on 12/07/2021

P0 9.3	DTS/DPF 9.3
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.
Corner	Cut-Offs
PO 10.1 Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	DTS/DPF 10.1 Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram: Corner Cut-Off Area in the following diagram:
	Off Area A.5M Road Reserve

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards) Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development	
	type.	
Residential Development		
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.	
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.	
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	

Page 107 of 124 Printed on 12/07/2021

Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Supported accommodation	0.3 spaces per bed.
Residential Development (Other)	
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Student accommodation	0.3 spaces per bed.
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
Tourist	
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
Tourist accommodation	1 car parking space per accommodation unit / guest room.
Commercial Uses	
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.
Automotive collision repair	3 spaces per service bay.
Call centre	8 spaces per 100m ² of gross leasable floor area.
Motor repair station	3 spaces per service bay.
Office	4 spaces per 100m ² of gross leasable floor area.
Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area

Page 108 of 124 Printed on 12/07/2021

	1 space per 100m ² of outdoor area used for display purposes.
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community and Civic Uses	
Childcare centre	0.25 spaces per child
Library	4 spaces per 100m ² of total floor area.
Community facility	10 spaces per 100m ² of total floor area.
Hall / meeting hall	0.2 spaces per seat.
Place of worship	1 space for every 3 visitor seats.
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
Health Related Uses	
Hospital	4.5 spaces per bed for a public hospital.
	1.5 spaces per bed for a private hospital.

Page 109 of 124 Printed on 12/07/2021

	2 spaces per seat.
Concert hall / theatre 0.2	
	2 spaces per seat.
flo	space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total oor area available to the public in a lounge, beer garden plus 1 space per 2 gaming nachines, plus 1 space per 3 seats in a restaurant.
Indoor recreation facility 6.8	.5 spaces per 100m ² of total floor area for a Fitness Centre
4.	.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.
Industry/Employment Uses	
Fuel depot 1.8	.5 spaces per 100m ² total floor area
1 :	spaces per 100m^2 of outdoor area used for fuel depot activity purposes.
Industry 1.8	.5 spaces per 100m ² of total floor area.
Store 0.9	.5 spaces per 100m ² of total floor area.
Timber yard 1.8	5 spaces per 100m ² of total floor area
1 :	space per 100m ² of outdoor area used for display purposes.
Warehouse 0.8	$5 \mathrm{spaces} \mathrm{per} 100 \mathrm{m}^2 \mathrm{total} \mathrm{floor} \mathrm{area}.$
Other Uses	
Funeral Parlour 1 s	space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station 5 s	spaces per 100m ² of total building floor area.

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

(a) the location of the development is unable to satisfy the requirements of Table 2 – Criteria (other than where a location is exempted from the application of those criteria)

(b) the development satisfies Table 2 – Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate		Designated Areas
	Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary	Capital City Zone

Page 110 of 124 Printed on 12/07/2021

1		
	Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multistorey building: 1 visitor space for each 6 dwellings.	City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
nt		
3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
3 spaces per 100m ² of gross leasable floor area.	6 spaces per 100m ² of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone Urban Activity Centre Zone
1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
1	1	
Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone
	3 spaces per 100m² of gross leasable floor area. 3 spaces per 100m² of gross leasable floor area. 1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces	Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres. Residential flat building or Residential component of a multistory building; 1 visitor space for each 6 dwellings. 1 spaces per 100m² of gross leasable floor area. 5 spaces per 100m² of gross leasable floor area. 1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms over 100 bedrooms over 100 bedrooms Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces None specified.

Page 111 of 124 Printed on 12/07/2021

	2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.		Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following:	(a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham
 (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service⁽²⁾ (b) is within 400 metres of a bus interchange⁽¹⁾ (c) is within 400 metres of an O-Bahn interchange⁽¹⁾ (d) is within 400 metres of a passenger rail station⁽¹⁾ (e) is within 400 metres of a passenger tram station⁽¹⁾ (f) is within 400 metres of the Adelaide Parklands. 	(c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

 $The \ bicycle \ parking \ rates \ apply \ within \ designated \ areas \ located \ within \ parts \ of \ the \ State \ identified \ in \ the \ Schedule \ to \ Table \ 3.$

	Bicycle Parking Rate Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.

Page 112 of 124 Printed on 12/07/2021

For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors.
For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
1 space per 15 beds plus 1 space per 30 beds for visitors.
1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
1 space for every $200 m^2$ of gross leasable floor area plus 2 spaces plus 1 space per $1000 m^2$ of gross leasable floor area for visitors.
1 space per 20 full time employees plus 1 space per 40 full time children.
1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.
1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40

Schedule to Table 3

Designated Area	Relevant part of the State The bicycle parking rate applies to a designated area located in a relevant part of the State
	described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide
Strategic Innovation Zone	
Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	

Page 113 of 124 Printed on 12/07/2021

Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Waste Treatment and Management Facilities

Assessment Provisions (AP)

Desired Outcome		
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Si	ting
P0 1.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate offsite impacts from noise, air and dust emissions.	None are applicable.
Soil and Wa	ter Protection
P0 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as:	None are applicable.
(a) containing potential groundwater and surface water contaminants within waste operations areas	
(b) diverting clean stormwater away from waste operations areas and potentially contaminated areas	
(c) providing a leachate barrier between waste operations areas and underlying soil and groundwater.	
PO 2.2	DTS/DPF 2.2
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.
P0 2.3	DTS/DPF 2.3
Wastewater lagoons are designed and sited to:	None are applicable.
(a) avoid intersecting underground waters;	
(b) avoid inundation by flood waters;	
(c) ensure lagoon contents do not overflow;	
(d) include a liner designed to prevent leakage.	
PO 2.4	DTS/DPF 2.4
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.

Page 114 of 124 Printed on 12/07/2021

Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity. P0 3.2 Access routes to waste treatment and management facilities via residential streets is avoided. P0 3.3 Litter control measures minimise the incidence of windblown litter. P0 3.4 Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access P0 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. P0 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security P0 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill gas emissions are managed in an environmentally acceptable management facilities are separated from areas of environmental significance Landfill facilities are separated from areas of environmental significance Landfill facilities are set back 250m or more from a public open spa
Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity. PO 3.2 Access routes to waste treatment and management facilities via residential streets is avoided. PO 3.3 Litter control measures minimise the incidence of windblown litter. PO 3.4 Mone are applicable. DTS/DPF 3.3 Litter control measures minimise the incidence of windblown litter. PO 3.4 Mone are applicable. DTS/DPF 3.4 None are applicable. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 DTS/DPF 5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in facilities prevents unauthorised access to operations and potential hazard to the public. Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. PD 6.2 DTS/DPF 6.2
designed to minimise adverse visual impacts on amenity. PO 3.2 Access routes to waste treatment and management facilities via residential streets is avoided. PO 3.3 Litter control measures minimise the incidence of windblown litter. PO 3.4 Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Po 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill PO 5.1 Landfill gas emissions are managed in an environmentally acceptable manner. PO 6.2 DTS/DPF 6.2 DTS/DPF 6.2
Access routes to waste treatment and management facilities via residential streets is avoided. PO 3.3 Litter control measures minimise the incidence of windblown litter. PO 3.4 Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. PO 6.2 DTS/DPF 6.1 None are applicable. DTS/DPF 6.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste management facility site. Landfill DTS/DPF 6.1 None are applicable.
residential streets is avoided. PO 3.3 Litter control measures minimise the incidence of windblown litter. PO 3.4 Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF 5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste to the public. DTS/DPF 6.1 Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF 6.2
Litter control measures minimise the incidence of windblown litter. PO 3.4 Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/OPF 6.1 Landfill DOS/OPF 6.1 Loandfill gas emissions are managed in an environmentally acceptable manner. DTS/OPF 6.2 DTS/OPF 6.2
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 DTS/OPF 4.1 None are applicable. DTS/OPF 4.2 None are applicable. DTS/OPF 5.1 Security fencing provided around waste treatment and management to the public. DTS/OPF 5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in its erected along the perimeter of the waste treatment or waste management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/OPF 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/OPF 6.2
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access PO 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. PO 6.2 DTS/DPF 6.2
adverse impacts on both the site and surrounding areas from weed and vermin infestation. Access P0 4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. P0 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. DTS/DPF 4.2 None are applicable. Fencing and Security P0 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. P0 6.2 DTS/DPF 6.2
P0.4.1 Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. P0.4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. DTS/DPF.4.2 None are applicable. Fencing and Security P0.5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF.5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste management facility site. DTS/DPF.6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF.6.2 DTS/DPF.6.2
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction. P0 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security P0 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF 5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste management facility site. Landfill P0 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. P0 6.2 DTS/DPF 6.1 None are applicable.
site are designed to enable vehicles to enter and exit the site in a forward direction. PO 4.2 Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF 6.1 Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. PO 6.2 DTS/DPF 6.2
Suitable access for emergency vehicles is provided to and within waste treatment or management sites. Fencing and Security P0 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. DTS/DPF 5.1 Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste management facility site. Landfill P0 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF 6.1 None are applicable.
treatment or management sites. Fencing and Security PO 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. PO 6.2 DTS/DPF 6.1 None are applicable.
Po 5.1 Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Landfill Po 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF 6.2 DTS/DPF 6.2 DTS/DPF 6.2
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public. Chain wire mesh or pre-coated painted metal fencing 2m or more in is erected along the perimeter of the waste treatment or waste management facility site. Landfill PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF 6.1 None are applicable. DTS/DPF 6.2
facilities prevents unauthorised access to operations and potential hazard to the public. Landfill
PO 6.1 Landfill gas emissions are managed in an environmentally acceptable manner. DTS/DPF 6.1 None are applicable. DTS/DPF 6.2
Landfill gas emissions are managed in an environmentally acceptable manner. None are applicable. DTS/DPF 6.2
manner. PO 6.2 DTS/DPF 6.2
Landfill facilities are separated from areas of environmental significance. Landfill facilities are set back 250m or more from a public open spa
and land used for public recreation and enjoyment.
PO 6.3 DTS/DPF 6.3
Landfill facilities are located on land that is not subject to land slip. None are applicable.
PO 6.4 DTS/DPF 6.4
Landfill facilities are separated from areas subject to flooding. Landfill facilities are set back 500m or more from land inundated in a AEP flood event.
Organic Waste Processing Facilities
P0 7.1 DTS/DPF 7.1
Organic waste processing facilities are separated from the coast to avoid potential environment harm. Organic waste processing facilities are set back 500m or more from coastal high water mark.
PO 7.2 DTS/DPF 7.2
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect. None are applicable.

Page 115 of 124 Printed on 12/07/2021

, ,	
P0 7.3	DTS/DPF 7.3
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.
PO 7.4	DTS/DPF 7.4
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.
PO 7.5	DTS/DPF 7.5
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Major Wastewater	Treatment Facilities
PO 8.1	DTS/DPF 8.1
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.
PO 8.2	DTS/DPF 8.2
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.

Workers' accommodation and Settlements

Assessment Provisions (AP)

	Desired Outcome
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
P0 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
P0 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

Page 116 of 124 Printed on 12/07/2021

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 117 of 124 Printed on 12/07/2021

Page 118 of 124 Printed on 12/07/2021

Page 119 of 124 Printed on 12/07/2021

Page 120 of 124 Printed on 12/07/2021

Page 121 of 124 Printed on 12/07/2021

Page 122 of 124 Printed on 12/07/2021

Page 123 of 124 Printed on 12/07/2021

Page 124 of 124 Printed on 12/07/2021

43 MAIN NORTH RD MEDINDIE SA 5081

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Local Variation (TNV)

Maximum Building Height (Levels) (Maximum building height is 3 levels)

Overlay

Aircraft Noise Exposure (ANEF 20)

Airport Building Heights (Regulated) (All structures over 45 metres)

Advertising Near Signalised Intersections

Future Road Widening

Hazards (Flooding - Evidence Required)

Major Urban Transport Routes

Prescribed Wells Area

Regulated and Significant Tree

Traffic Generating Development

Zone

Suburban Business

Development Pathways

Suburban Business

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Brush fence
- Building work on railway land
- Internal building work
- Partial demolition of a building or structure
- Solar photovoltaic panels (roof mounted)
- Water tank (above ground)
- Water tank (underground)

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Advertisement
- · Ancillary accommodation
- Carport
- Consulting room
- Dwelling or residential flat building undertaken by:
 (a) the South Australian Housing Trust either individually or jointly with other persons or bodies

Page 1 of 115 Printed on 12/07/2021

(b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.

- Office
- Outbuilding
- · Replacement building
- Shore
- · Temporary accommodation in an area affected by bushfire
- Verandah

3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

- Advertisement
- · Ancillary accommodation
- Carport
- · Consulting room
- Demolition
- · Detached dwelling
- · Dwelling addition
- Dwelling or residential flat building undertaken by:
 - (a) the South Australian Housing Trust either individually or jointly with other persons or bodies or
 - (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.
- Fence
- Group dwelling
- · Land division
- · Light industry
- Office
- Outbuilding
- · Residential flat building
- · Retaining wall
- Row dwelling
- Semi-detached dwelling
- · Service trade premises
- Shop
- Store
- · Tree-damaging activity
- Verandah
- Warehouse

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

Suburban Business Zone

Assessment Provisions (AP)

	Desired Outcome
DO 1	A business and innovation precinct that includes a range of emerging businesses which have low level off-site impacts. Residential development within the area is subordinate to employment uses and generally includes medium-density housing designed to complement and not prejudice the operation of existing businesses.
DO 2	A zone characterised by low-rise buildings with additional height in well serviced and accessible locations.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 2 of 115 Printed on 12/07/2021

Deemed-to-Satisfy Criteria / Performance Outcome Designated Performance Feature Land Use and Intensity PO 1.1 DTS/DPF 1.1 Shops, office, consulting room, low-impact industry and other non-Development comprises one or more of the following: residential uses are supported by a variety of compact, medium density housing and accommodation types. (a) Consulting room (b) Dwelling (c) Institutional facility Light industry (e) Motor repair station Office Residential flat building Retail fuel outlet Service trade premises Shop Store (k) Warehouse PO 1 2 DTS/DPF 1.2 Retail, business and commercial development is of a scale that provides a Shops, offices and consulting rooms do not exceed 500m² in gross local convenience service without undermining the vibrancy and function leasable floor area. of zones primarily intended to accommodate such development. DTS/DPF 1.3 Compact, medium density residential development does not prejudice the None are applicable. operation of non-residential activity within the zone. PO 1.4 DTS/DPF 1.4 Changes in the use of land between similar businesses encourages the A change of use to a shop, office or consulting room or any combination efficient reuse of commercial premises and supports continued local of these uses where all of the following are achieved: access to a range of services compatible to the locality. (a) the area to be occupied by the proposed development is in an existing building and is currently used as a shop, office, consulting room or any combination of these uses (b) if the proposed the change in use is for a shop: (i) the total gross leasable floor area of the shop will not exceed 500m² if primarily involving the handling and sale of foodstuffs, areas used for the storage and collection of refuse are sited at least 10m from the site of a dwelling (other than a dwelling directly associated with the proposed shop) (iii) if primarily involving heating and cooking of foodstuffs in a commercial kitchen and is within 30m of any residential allotment within a neighbourhood-type zone boundary or a dwelling (other than a dwelling directly associated with the proposed shop), an exhaust duct and stack (chimney) exists or is capable of being installed for discharging exhaust emissions (c) off-street vehicular parking exists in accordance with the rate(s) specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number, except where: (i) the required contribution will be made into a relevant car parking offset scheme (other than where a relevant contribution has previously been made)

Page 3 of 115 Printed on 12/07/2021

(ii) the building is a local heritage place.

Policy24 - Enquiry	and Character		
PO 2.1	DTS/DPF 2.1		
Building scale and design complement surrounding built form, streetscapes and local character.	None are applicable.		
PO 2.2 Development with high visual and environmental amenity, particularly along arterial roads and the boundaries of adjoining zones is primarily intended to accommodate sensitive receivers.	DTS/DPF 2.2 None are applicable.		
Buildina heia	nt and setbacks		
P0 3.1	DTS/DPF 3.1		
Buildings are generally of low-rise construction, with taller buildings positioned towards the centre of the zone and away from any adjoining neighbourhood-type zone to positively contribute to the built form character of a locality.	Building height (excluding garages, carports and outbuildings) is no greater than: (a) the following:		
	Maximum Building Height (Levels)		
	Maximum building height is 3 levels		
	(b) in all other cases (ie there is a blank field for both values): (i) 2 building levels or 9m where the development is located adjoining a different zone that primarily envisages residential development (ii) 3 building levels or 12m in all other cases.		
	In relation to DTS/DPF 3.1, in instances where: (c) more than one value is returned in the same field: (i) for the purpose of DTS/DPF 3.1(a), refer to the Maximum Building Height (Metres) Technical and Numeric Variation layer or Maximum Building Height (Levels) Technical and Numeric Variation layer in the SA planning database to		
	determine the applicable value relevant to the site of the proposed development (ii) only one value is returned for DTS/DPF 3.1(a), (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other.		
P0 3.2	DTS/DPF 3.2		
Buildings mitigate visual impacts of building massing on residential development within a neighbourhood-type zone.	Buildings constructed within a building envelope provided by a 45 degree plane measured from a height of 3m above natural ground level at the boundary of an allotment used for residential purposes within a neighbourhood-type zone as shown in the following diagram (except where this boundary is a southern boundary, or where this boundary is the primary street boundary) LEGEND ALLOTMENT BOUNDARY OF A RESIDENTIAL ALLOTMENT AN EIGHBOURHOOD TYPE ZONE AND THE PRIMARY ROAD PROVIDED TO THE PROVIDED TO		
PO 3.3	DTS/DPF 3.3		
Buildings mitigate overshadowing of residential development within a	Buildings on sites with a southern boundary adjoining an allotment used		

Page 4 of 115 Printed on 12/07/2021

Policy24 - Eriquity	
neighbourhood-type zone.	for residential purposes within a neighbourhood-type zone are constructed within a building envelope provided by a 30 degree plane grading north measured from a height of 3m above natural ground level at the southern boundary, as shown in the following diagram
	LEGEND SOUTHERN BOUNDARY MORTH BOUNDARY ADJOINING A RESIDENTIAL ALLOTMENT WITHIN A NEIGHBOURHOOD TYPE ZONE ROUNDARY BOUNDARY MEASURE BOUNDARY MATURAL GROUND LEVEL
PO 3.4	DTS/DPF 3.4
Buildings are set back from primary street boundaries to contribute to a	The building line of a building is set back from the primary street frontage:
consistent streetscape.	(a) the average of any existing buildings on either of the adjoining sites having frontage to the same street or
	(b) not less than 6m where no building exists on an adjoining site.
PO 3.5	DTS/DPF 3.5
Buildings are set back from secondary street boundaries (other than rear laneways) to contribute to a consistent streetscape.	Building walls are set back from the secondary street frontage: (a) the average of any existing buildings on adjoining sites having
	frontage to the same street or (b) not less than 900mm where no building exists on an adjoining site.
P0 3.6	DTS/DPF 3.6
Buildings are set back from side boundaries to maintain adequate separation and ventilation.	Other than walls located on a side boundary, building walls are set back at least 900mm from side boundaries.
PO 3.7	DTS/DPF 3.7
Buildings are set back from rear boundaries to minimise adverse impacts on adjoining land uses.	Building walls are set back from the rear boundary at least 3m.
PO 3.8	DTS/DPF 3.8
Buildings on an allotment fronting a road that is not a State maintained road, and where land on the opposite side of the road is within a neighbourhood-type zone, provides an orderly transition to the built form scale envisaged in the adjacent zone to complement the streetscape character.	None are applicable.
	Division
PO 4.1	DTS/DPF 4.1
Land division and / or site amalgamation create allotments that vary in size and are suitable for a variety of residential and commercial activities and improve the level of development integration.	None are applicable.
Adverti	sements
PO 5.1	DTS/DPF 5.1
Freestanding advertisements identify the associated business without creating a visually dominant element within the streetscape.	Freestanding advertisements: (a) do not exceed 6m in height
	(b) do not have a sign face that exceeds 4m ² per side

Page 5 of 115 Printed on 12/07/2021

Concept Plans

P0 6 1

Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code to support the orderly development of land through staging of development and provision of infrastructure.

DTS/DPF 6.1

The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant:

In relation to DTS/DPF 6.1, in instances where:

- (a) one or more Concept Plan is returned, refer to Part 12 Concept Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant.
- (b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 6.1 is met.

Ancillary Buildings and Structures

P0 7.1

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.

DTS/DPF 7.1

Ancillary buildings and structures:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m²
- (c) are not constructed, added to or altered so that any part is situated
 - in front of any part of the building line of the dwelling to which it is ancillary or
 - within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) f situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (9) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- have a roof height where no part of the roof is more than 5m above the natural ground level
- (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or

Page 6 of 115 Printed on 12/07/2021

	(i)	(ii), whichever is less: a total area as determined by the following table:	
		Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
		<150	10%
		150-200	15%
		201-450	20%
		>450	25%
	(ii)	the amount of existing soft landscaping occurring.	prior to the developmen
P0 7.2	DTS/DPI	- 7.2	
Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.	Ancilla (a) (b)	ry buildings and structures do not result in: less private open space than specified in Table 1 - Private Open Space less on-site car parking than specified in Parking Table 1 - General Off-Street Car F Table 2 - Off-Street Car Parking Requirem Areas.	Design in Urban Areas Transport, Access and Parking Requirements or

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class of Development	Exceptions
Column A)	(Column B)
 A kind of development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development. 	None specified.
 Any kind of development where the site of the development is not adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone. 	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3. Any development involving any of the following (or of any combination of any of the following): (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) ancillary accommodation (d) building work on railway land (e) carport (f) community facility (g) dwelling (h) fence	Except development that exceeds the maximum building height specified in Suburban Business Zone DTS/DPF 3.1 or does not satisfy any of the following: 1. Suburban Business Zone DTS/DPF 3.2 2. Suburban Business Zone DTS/DPF 3.3.

Page 7 of 115 Printed on 12/07/2021

Policy24 - Enquiry

-		
	 (i) outbuilding (j) private bushfire shelter (k) residential flat building (l) shade sail (m) solar photovoltaic panels (roof mounted) (n) student accommodation (o) swimming pool or spa pool (p) verandah (q) water tank. 	
	ny development involving any of the following (or of any ombination of any of the following): (a) consulting room (b) office (c) shop.	Except development that exceeds the maximum building height specified in Suburban Business Zone DTS/DPF 3.1 or does not satisfy any of the following: 1. Suburban Business Zone DTS/DPF 1.2 2. Suburban Business Zone DTS/DPF 3.2 3. Suburban Business Zone DTS/DPF 3.3.
	y development involving any of the following (or of any ombination of any of the following): (a) internal building works (b) land division (c) replacement building (d) temporary accommodation in an area affected by bushfire. (e) tree damaging activity.	None specified.
6. De	emolition.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.

Placement of Notices - Exemptions for Performance Assessed Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Advertising Near Signalised Intersections Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Provision of a safe road environment by reducing driver distraction at key points of conflict on the road.

 $Performance\ Outcomes\ (PO)\ and\ Deemed-to-Satisfy\ (DTS)\ Criteria\ /\ Designated\ Performance\ Feature\ (DPF)$

Page 8 of 115 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Advertisements Near S	Signalised Intersections
PO 1.1 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 1.1 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Advertisement or advertising hoarding that: (a) is within 100m of a: (i) signalised intersection or (ii) signalised pedestrian crossing and (b) will: (i) be internally illuminated or (ii) incorporate a moving or changing display or message or (iii) incorporate a flashing light.	Commissioner of Highways.	To provide expert technical assessment on potential risks relating to pedestrian and road safety which may arise from advertisements near intersections.	Development of a class to which Schedule 9 clause 3 item 21 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Aircraft Noise Exposure Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Development sensitive to aircraft noise is designed and located to manage noise intrusion to reduce land use conflict and protect human health.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
PO 1.1	DTS/DPF 1.1
Buildings that accommodate activities sensitive to aircraft noise are designed and located to minimise aircraft noise intrusion and provide	Buildings accommodating sensitive receivers are not located within an area having an ANEF value of 30 or more.

Page 9 of 115 Printed on 12/07/2021

appropriate interior acoustic amenity.			
Built	Form		
P0 2.1 Additions to buildings involving the addition or extension of habitable rooms are designed and located to minimise aircraft noise intrusion and provide appropriate interior acoustic amenity.	DTS/DPF 2.1 Dwelling additions involving the addition or extension of habitable rooms: (a) do not result in an increase in the total floor area of the existing dwelling by greater than 50 percent (b) do not occur in areas having an ANEF value of 30 or more.		
Land Division			
Land division does not increase the number of allotments used for sensitive receivers in areas adversely affected by aircraft noise to mitigate community exposure to potential adverse environmental and amenity impacts generated by aircraft movements.	Land division: (a) within an area having an ANEF value of less than 30 or (b) within an area having an ANEF value or 30 or more and: (i) does not result in any additional allotments or (ii) none of the allotments will accommodate a sensitive receiver.		

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Airport Building Heights (Regulated) Overlay

Assessment Provisions (AP)

Desired Outcome
Management of potential impacts of buildings and generated emissions to maintain operational and safety requirements of registered and certified commercial and military airfields, airports, airstrips and helicopter landing sites.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1 Building height does not pose a hazard to the operation of a certified or registered aerodrome.	DTS/DPF 1.1 Buildings are located outside the area identified as 'All structures' (no height limit is prescribed) and do not exceed the height specified in the Airport Building Heights (Regulated) Overlay which applies to the subject site as shown on the SA Property and Planning Atlas.
	In instances where more than one value applies to the site, the lowest value relevant to the site of the proposed development is applicable.

Page 10 of 115 Printed on 12/07/2021

PO 1.2

Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with a certified or registered aerodrome.

DTS/DPF 1.2

Development does not include exhaust stacks.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
(a) building located in an area identified as 'All structures' (no height limit is prescribed) or will exceed the height specified in the Airport Building Heights (Regulated) Overlay (b) building comprising exhaust stacks that generates plumes, or may cause plumes to be generated, above a height specified in the Airport Building Heights (Regulated) Overlay.	The airport-operator company for the relevant airport within the meaning of the Airports Act 1996 of the Commonwealth or, if there is no airport-operator company, the Secretary of the Minister responsible for the administration of the Airports Act 1996 of the Commonwealth.	To provide expert assessment and direction to the relevant authority on potential impacts on the safety and operation of aviation activities.	Development of a class to which Schedule 9 clause 3 item 1 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Future Road Widening Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development which is consistent with and will not compromise efficient delivery of future road widening requirements.

 $Performance\ Outcomes\ (PO)\ and\ Deemed\ to\ Satisfy\ (DTS)\ /\ Designated\ Performance\ Feature\ (DPF)\ Criteria$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Future Roa	nd Widening
P0 1.1	DTS/DPF 1.1
Development does not compromise or is located and designed to minimise its impact on future road widening requirements.	Development does not involve building work, or building work is located wholly outside the land subject to the 6m Consent Area, the C Type Requirement or the Strip Requirement of the Metropolitan Adelaide Road Widening Plan.

Procedural Matters (PM)

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Other than where all deemed-to-satisfy criteria for all policies relevant to this referral are met, development (including the	Commissioner of Highways.	To provide expert technical assessment and direction to the	Development of a class to

Page 11 of 115 Printed on 12/07/2021

division of land) that is within or may encroach within a	relevant authority on the safe and	which
Future Road Widening Area.	efficient operation and	Schedule 9
	management of all roads relevant	clause 3 item
	to the Commissioner of Highways	4 of the
	as described in the Planning and	Planning,
	Design Code.	Development
		and
		Infrastructure
		(General)
		Regulations
		2017 applies.

Hazards (Flooding - Evidence Required) Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	DO 1 Development adopts a precautionary approach to mitigate potential impacts on people, property, infrastructure and the environment from potential flood risk through the appropriate siting and design of development.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
	Designated Performance realure	
Flood R	esilience	
P0 1.1	DTS/DPF 1.1	
Development is sited, designed and constructed to minimise the risk of entry of potential floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished floor level at least 300mm above: (a) the highest point of top of kerb of the primary street or (b) the highest point of natural ground level at the primary street	
	boundary where there is no kerb	
Environmen	tal Protection	
PO 2.1	DTS/DPF 2.1	
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building.	Development does not involve the storage of hazardous materials.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None		None	None	None

Major Urban Transport Routes Overlay

Assessment Provisions (AP)

Page 12 of 115 Printed on 12/07/2021

site queuing adjacent to

access points is provided

	Desired Outcome	
DO 1	Safe and efficient operation of Major Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from Major Urban Transport Routes.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria


Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Outoonic	Access - Safe Entry and Exit (Traffic Flow)	
P0 1.1	DTS/DPF 1.1	
Po 1.1 Access is designed to allow safe entry and exit to and from a site to meet the needs of development and minimise traffic flow interference associated with access movements along adjacent State Maintained Roads.	DTS/DPF1.1 An access point satisfies (a), (b) or (c): (a) where servicing a single (1) residential dwelling / residential allotment: (i) it will not result in more than one access point vehicles can enter and exit the site in a forward direction vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road (v) have a width of between 3m and 4m (measured at the site boundary). (b) where the development will result in 2 and up to 6 dwellings: (i) it will not result in more than one access point servicing the development site entry and exit movements are left turn only (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees; (v) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road (vi) have a width of between 5.8m to 6 m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site). (c) where the development will result in over 7 dwellings, or is a non-residential land use: (i) it will not result in more than one access point servicing the development site vehicles can enter and exit the site using left turn only movements (vi) vehicles can enter and exit the site using left turn only movements (vi) average and 90 degrees (vi) have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to less have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m (vii) provides for simultaneous two-way vehicle movements at the access; A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles (where relevant) being fully within the kerbside lane	
	Access - On-Site Queuing	
PO 2.1	DTS/DPF 2.1	
	ible on- An access point in accordance with one of the following:	

Page 13 of 115 Printed on 12/07/2021


will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways,

to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption of the functional performance of the road and maintain safe vehicle movements

intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site).
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of, or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the largest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - Location (Spacing) - Existing Access Points

PO 3.1

Existing access points designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in a larger class of vehicle expected to access the site using the existing access
- (c) it is not located on a Controlled Access Road and development constitutes:
 - (i) change of use between an office less than 500m² gross leasable floor area and a consulting room less than 500m² gross leasable floor area or vice versa
 - (ii) change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) change of use from a consulting room or office less than 250m² gross leasable floor area to shop less than 250m² gross leasable floor area
 - (iv) change of use from a shop less than 500m² gross leasable floor area to a warehouse less than 500m² gross leasable floor area
 - (v) an office or consulting room with a gross leasable floor area less than 500m².

Access - Location (Spacing) - New Access Points

PO 4.1

DTS/DPF 4.1


New access points are

A new access point satisfies (a), (b) or (c):

Page 14 of 115 Printed on 12/07/2021

spaced apart from any existing access point or public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road.

(a) where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:

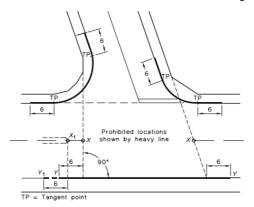

NOTE

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y-Y-extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing.
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h or	No spacing requirement	20m
less		
60 km/h	40m	123m
70 km/h	55m	151m
80 km/h	70m	181m
90 km/h	90m	214m
100 km/h	110m	248m
110 km/h	135m	285m

Access - Location (Sight Lines)

PO 5.1

DTS/DPF 5.1

Access points are located and designed to accommodate sight lines (a) An access point satisfies (a) or (b):


(a) drivers approaching or exit

that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.

(a) drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
40 km/h or	40m	73m
less		
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m

Page 15 of 115 Printed on 12/07/2021

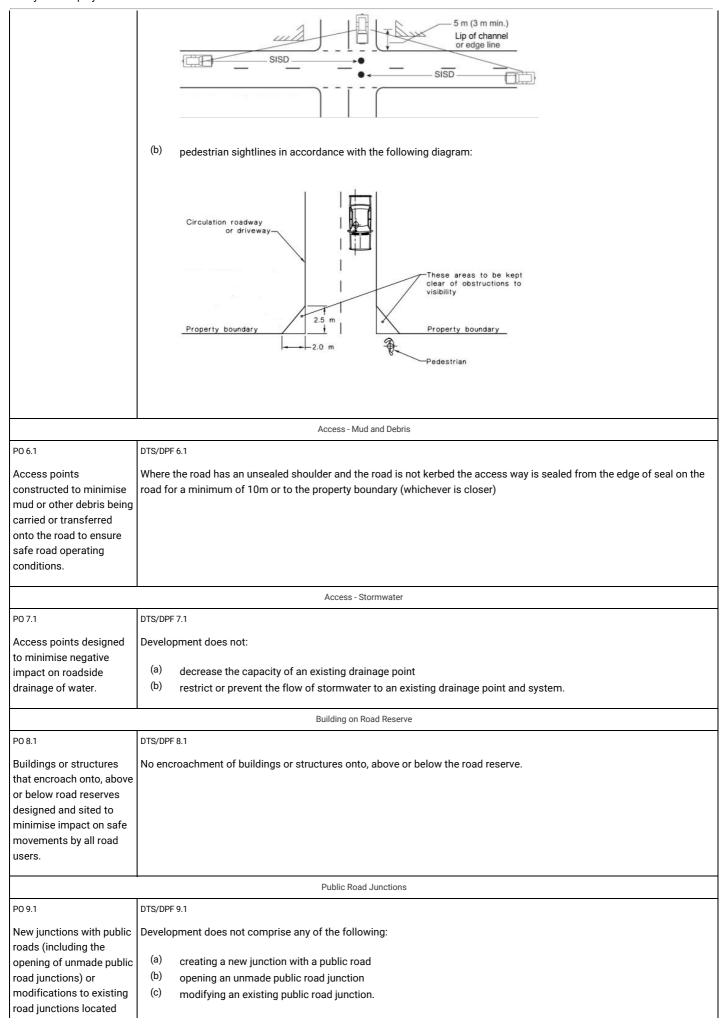

Page 16 of 115 Printed on 12/07/2021

and designed to ensure safe and efficient road	
operating conditions are	
maintained on the State	
Maintained Road.	
	Corner Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located	Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off
· ·	Area' in the following diagram:
sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	Corner Cut- Off Area Allotment Boundary Allotment Boundary Road Reserve

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Prescribed Wells Area Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Sustainable water use in prescribed wells areas.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
All development, but in particular involving any of the following:	Development satisfies either of the following:
(a) horticulture	(a) the applicant has a current water licence in which sufficient spare

Page 17 of 115 Printed on 12/07/2021

Policy24 - Enquiry

- (b) activities requiring irrigation
- (c) aquaculture
- (d) industry
- (e) intensive animal husbandry
- (f) commercial forestry

has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.

capacity exists to accommodate the water needs of the proposed use

(b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the Landscape South Australia Act 2019: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry. Commercial forestry that requires a forest water licence under Part 8 Division 6 of the Landscape South Australia Act 2019.	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Tree Retention and Health			
PO 1.1		DTS/DPF 1.1	
Regulat	red trees are retained where they:	None are applicable.	
(a)	make an important visual contribution to local character and amenity		
(b)	are indigenous to the local area and listed under the <i>National Parks and Wildlife Act 1972</i> as a rare or endangered native species and / or		
(c)	provide an important habitat for native fauna.		

Page 18 of 115 Printed on 12/07/2021

PO 1.2 DTS/DPF 1.2 Significant trees are retained where they: None are applicable. (a) make an important contribution to the character or amenity of the local area (b) are indigenous to the local area and are listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species (c) represent an important habitat for native fauna (d) are part of a wildlife corridor of a remnant area of native vegetation (e) are important to the maintenance of biodiversity in the local environment and / or (f) form a notable visual element to the landscape of the local area. DTS/DPF 1.3 A tree damaging activity not in connection with other development None are applicable. satisfies (a) and (b): tree damaging activity is only undertaken to: remove a diseased tree where its life expectancy is short (ii) mitigate an unacceptable risk to public or private safety due to limb drop or the like rectify or prevent extensive damage to a building of value as comprising any of the following: Α. a Local Heritage Place В. a State Heritage Place C. a substantial building of value and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire (v) treat disease or otherwise in the general interests of the health of the tree and / or (vi) maintain the aesthetic appearance and structural integrity of the tree (b) in relation to a significant tree, tree-damaging activity is avoided unless all reasonable remedial treatments and measures have been determined to be ineffective. PO 1.4 DTS/DPF 1.4 A tree-damaging activity in connection with other development satisfies all None are applicable. the following: (a) it accommodates the reasonable development of land in accordance with the relevant zone or subzone where such development might not otherwise be possible (b) in the case of a significant tree, all reasonable development options and design solutions have been considered to prevent substantial tree-damaging activity occurring. Ground work affecting trees PO 2.1 DTS/DPF 2.1 Regulated and significant trees, including their root systems, are not None are applicable. unduly compromised by excavation and / or filling of land, or the sealing of surfaces within the vicinity of the tree to support their retention and health. Land Division DTS/DPF 3.1

Page 19 of 115 Printed on 12/07/2021

Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.	Land division where: (a) there are no regulated or significant trees located within or adjacent to the plan of division
	or (b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body		Statutory Reference
None	e	None	None	None

Traffic Generating Development Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.		
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.		

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Traffic Genera	ting Development	
P0 1.1	DTS/DPF 1.1	
Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) Iand division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.	
P0 1.2	DTS/DPF 1.2	
Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:	
	(a) land division creating 50 or more additional allotments	

Page 20 of 115 Printed on 12/07/2021

	(b) commercial development with a gross floor area of 10,000m2 or more	
	(c) retail development with a gross floor area of 2,000m2 or more	
	(d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more	
	(e) industry with a gross floor area of 20,000m2 or more	
	(f) educational facilities with a capacity of 250 students or more.	
PO 1.3	DTS/DPF 1.3	
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it invold any of the following types of development:	
	(a) land division creating 50 or more additional allotments	
	(b) commercial development with a gross floor area of 10,000m2 or more	
	(c) retail development with a gross floor area of 2,000m2 or more	
	(d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more	
	(e) industry with a gross floor area of 20,000m2 or more	
	(f) educational facilities with a capacity of 250 students or more.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
met, an	where all of the relevant deemed-to-satisfy criteria are of the following classes of development that are ed within 250m of a State Maintained Road: land division creating 50 or more additional allotments commercial development with a gross floor area of 10,000m² or more retail development with a gross floor area of 2,000m² or more a warehouse or transport depot with a gross leasable floor area of 8,000m² or more industry with a gross floor area of 20,000m² or more educational facilities with a capacity of 250 students or more.	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

Desired Outcome		
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.	

Page 21 of 115 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Api	pearance
P0 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following:
	(a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above parapet height B. are not attached to the roof of the building
	(c) where they are not flush with a wall: (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (ii) if attached to a two-storey building:
	A. has no part located above the finished floor level of the second storey of the building
	B. does not protrude beyond the outer limits of any verandah structure below
	C. does not have a sign face that exceeds 1m2 per side.
Po 1.2	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building. (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building (i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is:
	(a) concealed by the associated advertisement and decorative detailing or (b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
P0 1.3	DTS/DPF 1.3
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4	DTS/DPF 1.4

Page 22 of 115 Printed on 12/07/2021

Where possible, advertisements on public land are integrated with existing structures and infrastructure.	Advertisements on public land that meet at least one of the following: (a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.	
PO 1.5	DTS/DPF 1.5	
Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.	
Proliferation of	Advertisements	
PO 2.1	DTS/DPF 2.1	
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.	
PO 2.2	DTS/DPF 2.2	
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.	
PO 2.3	DTS/DPF 2.3	
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:	
	(a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached (c) do not result in more than one sign per occupancy that is not flush with a wall.	
Advertisin	ng Content	
PO 3.1 Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	DTS/DPF 3.1 Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.	
Amenity	Impacts	
P0 4.1	DTS/DPF 4.1	
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.	
Sa	fety	
PO 5.1	DTS/DPF 5.1	
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.	
P0 5.2	DTS/DPF 5.2	
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.	
P0 5.3	DTS/DPF 5.3	
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following:	
(a) being liable to interpretation by drivers as an official traffic sign or signal	(a) are not located in a public road or rail reserve (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram	

Page 23 of 115 Printed on 12/07/2021

Policy24 - Enquiry	
obscuring or impairing drivers' view of official traffic signs of signals obscuring or impairing drivers' view of features of a road the potentially hazardous (such as junctions, bends, changes in and traffic control devices) or other road or rail vehicles at approaching level crossings.	at are width Corner Cut-Allotment Boundary
PO 5.4	DTS/DPF 5.4
Advertisements and/or advertising hoardings do not create a hazard distracting drivers from the primary driving task at a location where demands on driver concentration are high.	,
PO 5.5	DTS/DPF 5.5
Advertisements and/or advertising hoardings provide sufficient clear from the road carriageway to allow for safe and convenient movement all road users.	(a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
P05.6 Advertising near signalised intersections does not cause unreasona distraction to road users through illumination, flashing lights, or move changing displays or messages.	
	•

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

	Desired Outcome
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.

 $Performance\ Outcomes\ (PO)\ and\ Deemed-to-Satisfy\ (DTS)\ Criteria\ /\ Designated\ Performance\ Feature\ (DPF)$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
PO 1.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.

Page 24 of 115 Printed on 12/07/2021

PO 1.2	DTS/DPF 1.2	
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.	
Horse	Keeping	
P0 2.1	DTS/DPF 2.1	
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.	
PO 2.3	DTS/DPF 2.3	
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.	
PO 2.4	DTS/DPF 2.4	
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.	
PO 2.5	DTS/DPF 2.5	
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).	
Ker	I unels	
PO 3.1	DTS/DPF 3.1	
Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.	
PO 3.2	DTS/DPF 3.2	
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.	
(a) adopting appropriate separation distances (b) orientating openings away from sensitive receivers.		
PO 3.3	DTS/DPF 3.3	
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.	
Wastes		
PO 4.1	DTS/DPF 4.1	
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.	
PO 4.2	DTS/DPF 4.2	

Page 25 of 115 Printed on 12/07/2021

Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.

Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

Aquaculture

Assessment Provisions (AP)

Desired Outcome	
	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land-based Aquaculture	
P0 1.1	DTS/DPF 1.1
Land-based aquaculture and associated components are sited and designed to mitigate adverse impacts on nearby sensitive receivers.	Land-based aquaculture and associated components are located to satisfy all of the following: (a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to
P0 1.2	accommodate sensitive receivers. DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
PO 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.
P0 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	None are applicable.
P0 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.

Page 26 of 115 Printed on 12/07/2021

Marine Base	d Aquaculture
P0 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including:	None are applicable.
(a) creeks and estuaries (b) wetlands	
(c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.	
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
PO 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
(a) areas of high public use (b) areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports	
areas of outstanding visual or environmental value (d) areas of high tourism value	
(e) areas of important regional or state economic activity, including commercial ports, wharfs and jetties	
(f) the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	
PO 2.6	DTS/DPF 2.6
Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.	None are applicable.
PO 2.7	DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating measures such as:	None are applicable.
(a) using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b) positioning structures to protrude the minimum distance practicable above the surface of the water	
(c) avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons	
(d) positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8	DTS/DPF 2.8
Access, launching and maintenance facilities utilise existing established	None are applicable.
roads, tracks, ramps and paths to or from the sea where possible to minimise environmental and amenity impacts.	
PO 2.9	DTS/DPF 2.9
	1

Page 27 of 115 Printed on 12/07/2021

Policy24 - Enquiry	
Access, launching and maintenance facilities are developed as common user facilities and are co-located where practicable to mitigate adverse impacts on coastal areas.	None are applicable.
PO 2.10	DTS/DPF 2.10
Marine aquaculture is sited to minimise potential impacts on, and to protect the integrity of, reserves under the <i>National Parks and Wildlife Act</i> 1972.	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .
PO 2.11	DTS/DPF 2.11
Onshore storage, cooling and processing facilities do not impair the coastline and its visual amenity by:	None are applicable.
(a) being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape	
(b) making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access arrangements as far as practicable	
(c) incorporating appropriate waste treatment and disposal.	
Navigation	and Safety
P0 3.1	DTS/DPF 3.1
Marine aquaculture sites are suitably marked to maintain navigational safety.	None are applicable.
P0 3.2	DTS/DPF 3.2
Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	None are applicable.
Environmenta	I Management
PO 4.1	DTS/DPF 4.1
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.
P0 4.2	DTS/DPF 4.2
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.
PO 4.3	DTS/DPF 4.3
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.
P0 4.4	DTS/DPF 4.4
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	None are applicable.

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome

Page 28 of 115 Printed on 12/07/2021

DO 1

Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Odour a	and Noise
P0 1.1	DTS/DPF 1.1
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.
P0 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.
P0 1.3	DTS/DPF 1.3
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.
PO 1.4	DTS/DPF 1.4
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.
PO 1.5	DTS/DPF 1.5
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Water	Quality
PO 2.1	DTS/DPF 2.1
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
PO 2.2	DTS/DPF 2.2
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.
PO 2.3	DTS/DPF 2.3
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.
PO 2.4	DTS/DPF 2.4
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.
Wastewat	er Irrigation
P0 3.1	DTS/DPF 3.1
Beverage production wastewater irrigation systems are designed and	None are applicable.

Page 29 of 115 Printed on 12/07/2021

Policy24 - Enquiry

located to not contaminate soil and surface and ground water resources or damage crops.	
PO 3.2 Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	DTS/DPF 3.2 Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.
PO 3.3 Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as: (a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding (d) steeply sloping land (e) rocky or highly permeable soil overlaying an unconfined aquifer.	DTS/DPF 3.3 None are applicable.

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

Desired Outcome	
DO 1	Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting	and Design
P0 1.1	DTS/DPF 1.1
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers:
	(a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility
	(b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility
	bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more
	(d) coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not

Page 30 of 115 Printed on 12/07/2021

Olicy24 - Eliquity		
	exceeding 5000 tonnes: 1000m or more.	
Buffers and	Landscaping	
PO 2.1	DTS/DPF 2.1	
Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.	
Access and Parking		
PO 3.1	DTS/DPF 3.1	
Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	Roadways and vehicle parking areas are sealed with an all-weather surface.	
Slipways, Wharves and Pontoons		
PO 4.1	DTS/DPF 4.1	
Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	None are applicable.	

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome	
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act</i> 1996 (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

Desired Outcome

Page 31 of 115 Printed on 12/07/2021

DO 1

Development is:

- (a) contextual by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area
- (b) durable fit for purpose, adaptable and long lasting
- (c) inclusive by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
- (d) sustainable by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome **Deemed-to-Satisfy Criteria / Designated Performance Feature** All development **External Appearance** PO 1 1 DTS/DPF 1 1 Buildings reinforce corners through changes in setback, articulation, None are applicable. materials, colour and massing (including height, width, bulk, roof form and slope). PO 1.2 DTS/DPF 1.2 Where zero or minor setbacks are desirable, development provides shelter None are applicable. over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm. PO 1.3 DTS/DPF 1.3 Building elevations facing the primary street (other than ancillary None are applicable. buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape. PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment is Development does not incorporate any structures that protrude beyond integrated into the building design to minimise visibility from the public the roofline realm and negative impacts on residential amenity by: (a) positioning plant and equipment in unobtrusive locations viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. PO 1.5 DTS/DPF 1.5 The negative visual impact of outdoor storage, waste management, None are applicable. loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone. Safety PO 2.1 DTS/DPF 2.1 Development maximises opportunities for passive surveillance of the None are applicable. public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. DTS/DPF 2.2 Development is designed to differentiate public, communal and private None are applicable.

Page 32 of 115 Printed on 12/07/2021

Policy24 - Enquiry	
areas.	
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	ccaping
P0 3.1	DTS/DPF 3.1
Soft landscaping and tree planting is incorporated to:	None are applicable.
(a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity.	
PO 3.2	DTS/DPF 3.2
Soft landscaping and tree planting maximises the use of locally indigenous plant species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species.	None are applicable.
Environmenta	al Performance
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate-responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
Water Sens	sitive Design
PO 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.
(a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs.	
On-site Waste Tr	eatment Systems
PO 6.1	DTS/DPF 6.1

Page 33 of 115 Printed on 12/07/2021

Policy24 - Eliquii y	
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
Carparking	Appearance
PO 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:	None are applicable.
 (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure. 	
PO 7.2	DTS/DPF 7.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
P07.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
PO 7.4	DTS/DPF 7.4
Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	None are applicable.
P0 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	None are applicable.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks a	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m
ropography.	
	(b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or
	more.

Page 34 of 115 Printed on 12/07/2021

Policy24 - Eriquity	
P0 8.2	DTS/DPF 8.2
Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway
	(b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
 (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. 	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	None are applicable.
P0 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.
Fences	and Walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Privacy	(in building 3 storeys or less)
PO 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with a residential allotment/site satisfy one of the following:
	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm
	(b) have sill heights greater than or equal to 1.5m above finished floor level
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
P0 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and	One of the following is satisfied:
decks to habitable rooms and private open space of adjoining residential uses.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace
	or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:

Page 35 of 115 Printed on 12/07/2021

PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	(i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases I development Passive surveillance DTS/DPF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street.
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	DTS/DPF 11.2 Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.
Outlook ar	nd amenity
P0 12.1	DTS/DPF 12.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an outlook towards the street frontage or private open space, public open space, or waterfront areas.
PO 12.2	DTS/DPF 12.2
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.
Ancillary D	evelopment
Po 13.1 Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.	Ancillary buildings: (a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2 (c) are not constructed, added to or altered so that any part is situated: (i) in front of any part of the building line of the dwelling to which it is ancillary or (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) (d) in the case of a garage or carport, the garage or carport: (i) is set back at least 5.5m from the boundary of the primary street (ii) when facing a primary street or secondary street, has a total door / opening not exceeding: A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser B. for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width
	(e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: (i) a longer wall or structure exists on the adjacent site and

Page 36 of 115 Printed on 12/07/2021

Policy24 - Enquiry is situated on the same allotment boundary (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure have a wall height or post height not exceeding 3m above natural ground level (i) have a roof height where no part of the roof is more than $5\mbox{m}$ above the natural ground level (j) if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: a total area as determined by the following table: Dwelling site area (or in the case of Minimum residential flat building or group percentage of dwelling(s), average site area) (m²) site <150 10% 150-200 15% 201-450 20% >450 25% the amount of existing soft landscaping prior to the development occurring. PO 13.2 **DTS/DPF 13.2** Ancillary buildings and structures do not result in: Ancillary buildings and structures do not impede on-site functional less private open space than specified in Design in Urban Areas requirements such as private open space provision or car parking Table 1 - Private Open Space requirements and do not result in over-development of the site. (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. Fixed plant and equipment in the form of pumps and/or filtration systems The pump and/or filtration system is ancillary to a dwelling erected on the for a swimming pool or spa is positioned and/or housed to not cause same site and is: unreasonable noise nuisance to adjacent sensitive receivers. enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment (b) located at least 12m from the nearest habitable room located on an adjoining allotment. Garage appearance

PO 14.1

DTS/DPF 14.1

Garaging is designed to not detract from the streetscape or appearance of a dwelling.

Garages and carports facing a street:

(a) are situated so that no part of the garage or carport is in front of

any part of the building line of the dwelling

Page 37 of 115 Printed on 12/07/2021

- are set back at least 5.5m from the boundary of the primary street
- (c) have a garage door / opening not exceeding 7m in width
- (d) have a garage door /opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street.

Massing

PO 15 1

DTS/DPF 15.1

The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.

None are applicable

Dwelling additions

PO 16.1

Dwelling additions are sited and designed to not detract from the streetscape or amenity of adjoining properties and do not impede on-site functional requirements.

DTS / DPF 16.1

Dwelling additions:

- are not constructed, added to or altered so that any part is situated closer to a public street
- (b) do not result in:
 - (i) excavation exceeding a vertical height of 1m
 - (ii) filling exceeding a vertical height of 1m
 - (iii) a total combined excavation and filling vertical height of 2m or more
 - (iv) less Private Open Space than specified in Design Table 1- Private Open Space
 - (V) less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas
 - (vi) upper level windows facing side or rear boundaries unless:
 - A. they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm or
 - B. have sill heights greater than or equal to 1.5m above finished floor level
 - C. incorporate screening to a height of 1.5m above finished floor level
 - (vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - A. 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land
 - B. 1.7m above finished floor level in all other cases.

Private Open Space

PO 17.1

DTS/DPF 17.1

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

Private open space is provided in accordance with Design Table 1 - Private Open Space.

Water Sensitive Design

PO 18.1

DTS/DPF 18.1

Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other

Residential development creating a common driveway / access that services 5 or more dwellings achieves the following stormwater runoff outcomes:

Page 38 of 115 Printed on 12/07/2021

Policy24 - Enquiry	
water bodies.	(a) 80 per cent reduction in average annual total suspended solids (b) 60 per cent reduction in average annual total phosphorus (c) 45 per cent reduction in average annual total nitrogen.
PO 18.2	DTS/DPF 18.2
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	Development creating a common driveway / access that services 5 or more dwellings: (a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased or captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and (b) manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings.
Car parking, access	and manoeuvrability
PO 19.1	DTS/DPF 19.1
Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.	Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):
	(a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side):
	 (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 19.2	DTS/DPF 19.2
Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3 Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages, domestic waste collection and on-street parking.	DTS/DPF 19.3 Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land
	(b) where newly proposed: (i) is set back 6m or more from the tangent point of an intersection of 2 or more roads (ii) is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing (iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.

Page 39 of 115 Printed on 12/07/2021

PO 19.5 DTS/DPF 19.5 Driveways are designed to enable safe and convenient vehicle movements Driveways are designed and sited so that: from the public road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary (c) if located to provide access from an alley, lane or right of way the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site PO 19.6 DTS/DPF 19.6 Driveways and access points are designed and distributed to optimise the Where on-street parking is available abutting the site's street frontage, onprovision of on-street visitor parking. street parking is retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 20.1 DTS/DPF 20.1 Provision is made for the adequate and convenient storage of waste bins None are applicable. in a location screened from public view. Design of Transportable Dwellings PO 21.1 DTS/DPF 21.1 The sub-floor space beneath transportable buildings is enclosed to give Buildings satisfy (a) or (b): the appearance of a permanent structure. (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Group dwelling, residential flat buildings and battle-axe development Amenity PO 22.1 DTS/DPF 22.1 Dwellings are of a suitable size to accommodate a layout that is well Dwellings have a minimum internal floor area in accordance with the organised and provides a high standard of amenity for occupants. following table: **Number of bedrooms** Minimum internal floor area Studio 35m² 1 bedroom 50m² 2 bedroom 65m² 3+ bedrooms 80m² and any dwelling over 3 bedrooms provides an additional

Page 40 of 115 Printed on 12/07/2021

15m² for every additional bedroom

P0 22.2	DTS/DPF 22.2
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.
PO 22.3	DTS/DPF 22.3
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.
P0 22.4	DTS/DPF 22.4
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in the form of a battle-axe arrangement.
Соттипа	l Open Space
P0 23.1	DTS/DPF 23.1
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 23.2	DTS/DPF 23.2
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 23.3	DTS/DPF 23.3
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 23.4	DTS/DPF 23.4
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 23.5	DTS/DPF 23.5
Communal open space is designed and sited to:	None are applicable.
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Carparking, access	and manoeuvrability
PO 24.1	DTS/DPF 24.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	 (a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 24.2	DTS/DPF 24.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.

Page 41 of 115 Printed on 12/07/2021

PO 24.3	DTS/DPF 24.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:
	(a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a
	passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
P0 24.4	DTS/DPF 24.4
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.
PO 24.5	DTS/DPF 24.5
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 24.6	DTS/DPF 24.6
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Soft Lar	ndscaping
PO 25.1	DTS/DPF 25.1
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.
P0 25.2	DTS/DPF 25.2
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Site Facilities.	/ Waste Storage
P0 26.1	DTS/DPF 26.1
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 26.2	DTS/DPF 26.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 26.3	DTS/DPF 26.3
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.	
PO 26.4	DTS/DPF 26.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
	•

Page 42 of 115 Printed on 12/07/2021

Policy24 - Eriquity	
PO 26.5	DTS/DPF 26.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
PO 26.6	DTS/DPF 26.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Supported accommodation	on and retirement facilities
Siting and 0	onfiguration
P0 27.1	DTS/DPF 27.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
Movement	and Access
PO 28.1	DTS/DPF 28.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
ground-level access or lifted access to all units level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places	
(c) car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	
	Open Space
PO 29.1	Open Space DTS/DPF 29.1
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents	DTS/DPF 29.1
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	DTS/DPF 29.1 None are applicable.
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable.
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation.	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres.
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation.	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 29.4
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation. Po 29.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 29.4
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. P0 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. P0 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation. P0 29.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 29.4 None are applicable.
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation. Po 29.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. Po 29.5 Communal open space contains landscaping and facilities that are	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 29.4 None are applicable.
Po 29.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. Po 29.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. Po 29.3 Communal open space is of sufficient size and dimensions to cater for group recreation. Po 29.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. Po 29.5 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	DTS/DPF 29.1 None are applicable. DTS/DPF 29.2 None are applicable. DTS/DPF 29.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 29.4 None are applicable. DTS/DPF 29.5 None are applicable.

Page 43 of 115 Printed on 12/07/2021

1 Olloy 24 - Eriquity	
into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities /	Waste Storage
PO 30.1	DTS/DPF 30.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.	None are applicable.
P0 30.2	DTS/DPF 30.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 30.3	DTS/DPF 28.3
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 30.4	DTS/DPF 30.4
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.
PO 30.5	DTS/DPF 30.5
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 30.6	DTS/DPF 30.6
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.
PO 30.7	DTS/DPF 30.7
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
All non-resident	ial development
Water Sens	itive Design
P0 31.1	DTS/DPF 31.1
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.
PO 31.2	DTS/DPF 31.2
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.
Wash-down and Waste	Loading and Unloading
P0 32.1	DTS/DPF 32.1
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, vessels, plant or equipment are:	None are applicable.
(a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off	
(b) paved with an impervious material to facilitate wastewater collection	
(c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area	
(d) designed to drain wastewater to either:	

Page 44 of 115 Printed on 12/07/2021

Policy24 - Enquiry

- (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme
- a holding tank and its subsequent removal off-site on a regular basis.

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): $4m^2$ with a minimum dimension 1.8m One bedroom: $8m^2$ with a minimum dimension 2.1m Two bedroom dwelling: $11m^2$ with a minimum dimension 2.4m Three + bedroom dwelling: $15m^2$ with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development is:
	 (a) contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality (b) durable - fit for purpose, adaptable and long lasting (c) inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors (d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance Feature All Development External Appearance

Page 45 of 115 Printed on 12/07/2021

P0 1.1

Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.
PO 1.2	DTS/DPF 1.2
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.
PO 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.
positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses.	
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing,	None are applicable.
landscaping and built form), taking into account the form of development contemplated in the relevant zone.	
landscaping and built form), taking into account the form of development contemplated in the relevant zone.	rety
landscaping and built form), taking into account the form of development contemplated in the relevant zone.	DTS/DPF 2.1
landscaping and built form), taking into account the form of development contemplated in the relevant zone.	
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the	DTS/DPF 2.1
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	DTS/DPF 2.1 None are applicable.
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas.	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable.
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable. DTS/DPF 2.3
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable.
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable.
landscaping and built form), taking into account the form of development contemplated in the relevant zone. Sa PO 2.1 Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5

DTS/DPF 1.1

Page 46 of 115 Printed on 12/07/2021

PO 3.1 DTS/DPF 3.1 Soft landscaping and tree planting are incorporated to: None are applicable. minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes. **Environmental Performance** PO 4.1 DTS/DPF 4.1 Buildings are sited, oriented and designed to maximise natural sunlight None are applicable. access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4 2 DTS/DPF 4.2 Buildings are sited and designed to maximise passive environmental None are applicable. performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. DTS/DPF 4.3 Buildings incorporate climate responsive techniques and features such as None are applicable. building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells. Water Sensitive Design PO 5.1 DTS/DPF 5.1 Development is sited and designed to maintain natural hydrological None are applicable. systems without negatively impacting: (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs. On-site Waste Treatment Systems PO 6.1 DTS/DPF 6.1 Dedicated on-site effluent disposal areas do not include any areas to be Effluent disposal drainage areas do not: used for, or could be reasonably foreseen to be used for, private open encroach within an area used as private open space or result in space, driveways or car parking. less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. Car parking appearance DTS/DPF 7.1 P0 7 1 Development facing the street is designed to minimise the negative None are applicable. impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure. PO 7.2 DTS/DPF 7.2 Vehicle parking areas appropriately located, designed and constructed to None are applicable. minimise impacts on adjacent sensitive receivers through measures such

Page 47 of 115 Printed on 12/07/2021

Policy24 - Enquiry			
as ensuring they are attractively developed and landscaped, screen fenced and the like.			
P0 7.3	DTS/DPF 7.3		
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.		
P0 7.4	DTS/DPF 7.4		
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.		
PO 7.5	DTS/DPF 7.5		
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of: (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces.		
	(e) This between double rows of car parking spaces.		
PO 7.6	DTS/DPF 7.6		
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.		
P0 7.7	DTS/DPF 7.7		
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.		
Earthworks ar	d sloping land		
	a croping rand		
PO 8.1	DTS/DPF 8.1		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 None are applicable.		

Page 48 of 115 Printed on 12/07/2021

Policy24 - Enquiry				
PO 8.5	DTS/DPF 8.5			
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.			
Fences and walls				
PO 9.1	DTS/DPF 9.1			
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.			
PO 9.2	DTS/DPF 9.2			
Landscaping is incorporated on the low side of retaining walls that are visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.			
Overlooking / Visual Pr	ivacy (low rise buildings)			
PO 10.1	DTS/DPF 10.1			
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses in neighbourhood-type zones.	Upper level windows facing side or rear boundaries shared with a residential use in a neighbourhood-type zone: (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm (b) have sill heights greater than or equal to 1.5m above finished floor level			
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.			
PO 10.2	DTS/DPF 10.2			
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type zones.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases			
Sita Equilities / Westa Starage (avalu	ding law rice residential development)			
	ıdıng low rise residential development)			
PO 11.1 Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	DTS/DPF 11.1 None are applicable.			
PO 11.2	DTS/DPF 11.2			
Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.			
PO 11.3	DTS/DPF 11.3			
Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	None are applicable.			
PO 11.4	DTS/DPF 11.4			
Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	None are applicable.			
	<u> </u>			

Page 49 of 115 Printed on 12/07/2021

PO 11.5 **DTS/DPF 11.5** For mixed use developments, non-residential waste and recycling storage None are applicable. areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate. All Development - Medium and High Rise External Appearance PO 12.1 DTS/DPF 12.1 Buildings positively contribute to the character of the local area by None are applicable. responding to local context. PO 12.2 DTS/DPF 12.2 Architectural detail at street level and a mixture of materials at lower None are applicable. building levels near the public interface are provided to reinforce a human scale. PO 12.3 DTS/DPF 12.3 Buildings are designed to reduce visual mass by breaking up building None are applicable. elevations into distinct elements. PO 12 4 DTS/DPF 12.4 Boundary walls visible from public land include visually interesting None are applicable. treatments to break up large blank elevations. PO 12.5 DTS/DPF 12.5 External materials and finishes are durable and age well to minimise Buildings utilise a combination of the following external materials and ongoing maintenance requirements. finishes: (a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration. PO 12.6 DTS/DPF 12.6 Street-facing building elevations are designed to provide attractive, high Building street frontages incorporate: quality and pedestrian-friendly street frontages. (a) active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions. DTS/DPF 12.7 PO 12.7 Entrances to multi-storey buildings are safe, attractive, welcoming, Entrances to multi-storey buildings are: functional and contribute to streetscape character. (a) oriented towards the street (b) clearly visible and easily identifiable from the street and vehicle parking areas (c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses designed to provide shelter, a sense of personal address and (d) transitional space around the entry (e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors (f) designed to avoid the creation of potential areas of entrapment. PO 12.8 DTS/DPF 12.8 Building services, plant and mechanical equipment are screened from the None are applicable. public realm. Landscaping

Page 50 of 115 Printed on 12/07/2021

PO 13.1 DTS/DPF 13.1 Development facing a street provides a well landscaped area that contains Buildings provide a 4m by 4m deep soil space in front of the building that a deep soil space to accommodate a tree of a species and size adequate accommodates a medium to large tree, except where no building setback to provide shade, contribute to tree canopy targets and soften the from front property boundaries is desired. appearance of buildings. PO 13.2 DTS/DPF 13.2 Deep soil zones are provided to retain existing vegetation or provide areas Multi-storey development provides deep soil zones and incorporates trees that can accommodate new deep root vegetation, including tall trees with at not less than the following rates, except in a location or zone where full large canopies to provide shade and soften the appearance of multi-storey site coverage is desired. buildings. Minimum deep Site area **Minimum** Tree / deep soil soil area dimension zones 1.5m 1 small tree / 10 <300 m² 10 m^2 m^2 300-1500 m² 7% site area 3m 1 medium tree / 30 m^2 7% site area 1 large or >1500 m² 6m medium tree / 60 m^2 Tree size and site area definitions Small tree 4-6m mature height and 2-4m canopy spread Medium tree 6-12m mature height and 4-8m canopy spread Large tree 12m mature height and >8m canopy spread Site area The total area for development site, not average area per dwelling DTS/DPF 13.3 PO 13 3 Deep soil zones with access to natural light are provided to assist in None are applicable. maintaining vegetation health. PO 13.4 DTS/DPF 13.4 Unless separated by a public road or reserve, development sites adjacent Building elements of 3 or more building levels in height are set back at to any zone that has a primary purpose of accommodating low-rise least 6m from a zone boundary in which a deep soil zone area is residential development incorporate a deep soil zone along the common incorporated. boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height. Environmental DTS/DPF 14.1 Development minimises detrimental micro-climatic impacts on adjacent None are applicable. land and buildings. PO 14.2 DTS/DPF 14.2 Development incorporates sustainable design techniques and features None are applicable. such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.

Page 51 of 115 Printed on 12/07/2021

P0 14.3

Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:

- a podium at the base of a tall tower and aligned with the street to deflect wind away from the street
- substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas
- (c) the placement of buildings and use of setbacks to deflect the wind at ground level
- (d) avoiding tall shear elevations that create windy conditions at street level.

DTS/DPF 14.3

None are applicable.

Car Parking

PO 15.1

Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings.

DTS/DPF 15.1

Multi-level vehicle parking structures within buildings:

- provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages
- (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings.

PO 15.2

Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.

DTS/DPF 15.2

None are applicable.

Overlooking/Visual Privacy

PO 16.1

Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:

- (a) appropriate site layout and building orientation
- (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight
- (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms
- (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity.

DTS/DPF 16.1

None are applicable.

All residential development

Front elevations and passive surveillance

PO 17.1

Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.

DTS/DPF 17.1

Each dwelling with a frontage to a public street:

- includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2 4m
- (b) has an aggregate window area of at least 2m² facing the primary street.

PO 17.2

Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.

DTS/DPF 17.2

Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.

Outlook and Amenity

Page 52 of 115 Printed on 12/07/2021

Policy24 - Enquiry DTS/DPF 18 1 PO 18.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an external outlook amenity for occupants. of the street frontage, private open space, public open space, or waterfront areas. PO 18.2 DTS/DPF 18.2 Bedrooms are separated or shielded from active communal recreation None are applicable. areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. **Ancillary Development** DTS/DPF 19.1 PO 19.1 Ancillary buildings: Residential ancillary buildings are sited and designed to not detract from are ancillary to a dwelling erected on the same site the streetscape or appearance of primary residential buildings on the site have a floor area not exceeding 60m2 or neighbouring properties. are not constructed, added to or altered so that any part is situated: in front of any part of the building line of the dwelling to which it is ancillary within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) (d) in the case of a garage or carport, the garage or carport: is set back at least 5.5m from the boundary of the primary street when facing a primary street or secondary street, has a total door / opening not exceeding: for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure (h) have a wall height or post height not exceeding 3m above natural ground level have a roof height where no part of the roof is more than 5m above the natural ground level if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour retains a total area of soft landscaping in accordance with (i) or

residential flat building or group percentage of

Page 53 of 115

(ii), whichever is less:

a total area as determined by the following table:

Minimum

Printed on 12/07/2021

Dwelling site area (or in the case of

1	1		1	
		dwelling(s), average site area) (m ²)	site	
		<150	10%	
		150-200	15%	
		201-450	20%	
		>450	25%	
	(ii)	the amount of existing soft landscap development occurring.	ing prior to the	
PO 19.2	DTS/DPF 19.2			
Ancillary buildings and structures do not impede on-site functional	Ancillary buildings and structures do not result in:			
requirements such as private open space provision, car parking requirements or result in over-development of the site.	(a) less private open space than specified in Design in Urban Areas			
	Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and			
		ng Table 1 - General Off-Street Car Parki 2 2 - Off-Street Car Parking Requirements 3.		
PO 19.3	DTS/DPF 19.3			
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa positioned and/or housed to not cause	The pump and/or filtration system is ancillary to a dwelling erected on the same site and is:			
unreasonable noise nuisance to adjacent sensitive receivers.		sed in a solid acoustic structure that is the nearest habitable room located on a		
	allotn		, g	
	(b) locate	ed at least 12m from the nearest habita ljoining allotment.	ble room located on	
Residential Devel	opment - Low Rise			
External a	appearance			
PO 20.1	DTS/DPF 20.1			
Garaging is designed to not detract from the streetscape or appearance of a dwelling.		carports facing a street:		
		ituated so that no part of the garage or or of the garage or of the dw		
	(b) are se	et back at least 5.5m from the boundary	of the primary	
	(c) have	a garage door / opening width not excee		
		a garage door / opening width not excee age unless the dwelling has two or more		
	the b	uilding line fronting the same public stre	et.	
PO 20.2	DTS/DPF 20.2			
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other			
	`	ther than a laneway) or a common drive nimum of 30% of the building wall is set I	•	
	300m	nm from the building line		
	(c) a balo	ch or portico projects at least 1m from t cony projects from the building wall	me bunding wall	
		andah projects at least 1m from the buil s of a minimum 400mm width extend alo		
	front	elevation		
	(f) a min	nimum 30% of the width of the upper leve	el projects forward	

Page 54 of 115 Printed on 12/07/2021

P0 20.3 The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	from the lower level primary building line by at least 300mm (g) a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish. DTS/DPF 20.3 None are applicable		
Private 0	pen Space		
P0 21.1	DTS/DPF 21.1		
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is provided in accordance with Design in Urban Areas Table 1 - Private Open Space.		
P0 21.2	DTS/DPF 21.2		
Private open space is positioned to provide convenient access from internal living areas.	Private open space is directly accessible from a habitable room.		
Lands	caping		
P0 22.1	DTS/DPF 22.1		
Soft landscaping is incorporated into development to: (a) minimise heat absorption and reflection (b) contribute shade and shelter (c) provide for stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes.	Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b): (a) a total area as determined by the following table: Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m²) <150		
	and manoeuvrability		
PO 23.1	DTS/DPF 23.1		
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.	Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area): (a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m		

Page 55 of 115 Printed on 12/07/2021

Policy24 - Enquiry	(iii) minimum garage door width of 2.4m per space.
	minimum garage addi matriol 2: mi per opade.
PO 23.2 Uncovered car parking space are of dimensions to be functional,	DTS/DPF 23.2 Uncovered car parking spaces have:
accessible and convenient.	(a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
PO 23.3	DTS/DPF 23.3
Driveways and access points are located and designed to facilitate safe access and egress while maximising land available for street tree planting,	Driveways and access points satisfy (a) or (b):
domestic waste collection, landscaped street frontages and on-street parking.	(a) sites with a frontage to a public road of 10m or less, have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site
	(b) sites with a frontage to a public road greater than 10m: (i) have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; (ii) have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m.
PO 23.4	DTS/DPF 23.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads
	(iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 23.5	DTS/DPF 23.5
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site
PO 23.6	DTS/DPF 23.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded

Page 56 of 115 Printed on 12/07/2021

up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage DTS/DPF 24.1 PO 24.1 Provision is made for the convenient storage of waste bins in a location Where dwellings abut both side boundaries a waste bin storage area is screened from public view. provided behind the building line of each dwelling that: has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. Design of Transportable Buildings PO 25.1 DTS/DPF 25.1 The sub-floor space beneath transportable buildings is enclosed to give Buildings satisfy (a) or (b): the appearance of a permanent structure. (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Residential Development - Medium and High Rise (including serviced apartments) Outlook and Visual Privacy PO 26.1 DTS/DPF 26.1 Ground level dwellings have a satisfactory short range visual outlook to **Buildings:** public, communal or private open space. (a) provide a habitable room at ground or first level with a window facing toward the street (b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage. PO 26.2 DTS/DPF 26.2 The visual privacy of ground level dwellings within multi-level buildings is The finished floor level of ground level dwellings in multi-storey protected. developments is raised by up to 1.2m. Private Open Space PO 27.1 DTS/DPF 27.1 Dwellings are provided with suitable sized areas of usable private open Private open space provided in accordance with Design in Urban Areas space to meet the needs of occupants. Table 1 - Private Open Space. Residential amenity in multi-level buildings DTS/DPF 28.1 PO 28 1 Residential accommodation within multi-level buildings have habitable Habitable rooms and balconies of independent dwellings and rooms, windows and balconies designed and positioned to be separated accommodation are separated by at least 6m from one another where from those of other dwellings and accommodation to provide visual and there is a direct line of sight between them and 3m or more from a side or acoustic privacy and allow for natural ventilation and the infiltration of rear property boundary. daylight into interior and outdoor spaces. PO 28.2 DTS/DPF 28.2 Balconies utilise one or a combination of the following design elements: Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to: (a) sun screens respond to daylight, wind, and acoustic conditions to maximise (b) pergolas

Page 57 of 115 Printed on 12/07/2021

Policy24 - Enquiry		
comfort and provide visual privacy (b) allow views and casual surveillance of the street while providing	(c) louvres	
for safety and visual privacy of nearby living spaces and private outdoor areas.	(d) green facades (e) openable walls.	
PO 28.3	DTS/DPF 28.3	
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimu dimension of 2m.	
PO 28.4	DTS/DPF 28.4	
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling: (a) studio: not less than 6m ³	
	 (b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m³ (d) 3+ bedroom dwelling / apartment: not less than 12m³. 	
PO 28.5	DTS/DPF 28.5	
Dwellings that use light wells for access to daylight, outlook and ventilation for habitable rooms, are designed to ensure a reasonable living	Light wells:	
amenity is provided.	 (a) are not used as the primary source of outlook for living rooms (b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms (c) above 18m in height have a minimum horizontal dimension of 6m, 	
	or 9m if overlooked by bedrooms.	
PO 28.6	DTS/DPF 28.6	
Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	None are applicable.	
PO 28.7	DTS/DPF 28.7	
Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.	None are applicable.	
Dwelling C	configuration	
PO 29.1	DTS/DPF 29.1	
Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	Buildings containing in excess of 10 dwellings provide at least one of each of the following:	
,	(a) studio (where there is no separate bedroom)	
	(b) 1 bedroom dwelling / apartment with a floor area of at least 50m ²	
	(c) 2 bedroom dwelling / apartment with a floor area of at least 65m ²	
	(d) 3+ bedroom dwelling / apartment with a floor area of at least 80m², and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom.	
PO 29.2	DTS/DPF 29.2	
Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	None are applicable.	
Comm	on Areas	
PO 30.1	DTS/DPF 30.1	
The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.	Common corridor or circulation areas:	
more ment of bioyotes, strongles, mobility and and violitin waiting dieds.	(a) have a minimum ceiling height of 2.7m	

Page 58 of 115 Printed on 12/07/2021

provide access to no more than 8 dwellings (c) incorporate a wider section at apartment entries where the corridors exceed 12m in length from a core. Group Dwellings, Residential Flat Buildings and Battle axe Development Amenity PO 31.1 DTS/DPF 31.1 Dwellings are of a suitable size to provide a high standard of amenity for Dwellings have a minimum internal floor area in accordance with the occupants. following table: Number of bedrooms Minimum internal floor area Studio 35m²1 bedroom 50m² 2 bedroom 65m² 3+ bedrooms 80m² and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom PO 31.2 DTS/DPF 31.2 The orientation and siting of buildings minimises impacts on the amenity, None are applicable. outlook and privacy of occupants and neighbours. PO 31.3 DTS/DPF 31.3 Development maximises the number of dwellings that face public open None are applicable. space and public streets and limits dwellings oriented towards adjoining properties. PO 31.4 DTS/DPF 31.4 Battle-axe development is appropriately sited and designed to respond to Dwelling sites/allotments are not in the form of a battle-axe arrangement. the existing neighbourhood context. Communal Open Space DTS/DPF 32.1 PO 32.1 Private open space provision may be substituted for communal open None are applicable. space which is designed and sited to meet the recreation and amenity needs of residents. DTS/DPF 32.2 Communal open space is of sufficient size and dimensions to cater for Communal open space incorporates a minimum dimension of 5 metres. group recreation. PO 32.3 DTS/DPF 32.3 None are applicable. Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 DTS/DPF 32.4 Communal open space contains landscaping and facilities that are None are applicable. functional, attractive and encourage recreational use. **DTS/DPF 32.5** None are applicable. Communal open space is designed and sited to: in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings

Page 59 of 115 Printed on 12/07/2021

(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Car parking, access	and manoeuvrability
PO 33.1	DTS/DPF 33.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	 (a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 33.2	DTS/DPF 33.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 33.3	DTS/DPF 33.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:
	(a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 33.4	DTS/DPF 33.4
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 33.5	DTS/DPF 33.5
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Soft lan	dscaping
PO 34.1	DTS/DPF 34.1
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.
PO 34.2	DTS/DPF 34.2
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension
	of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). (Waste Storage

Page 60 of 115 Printed on 12/07/2021

Policy24 - Eriquity	
PO 35.1	DTS/DPF 35.1
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature	None are applicable.
of accommodation and mobility of occupants.	
P0 35.2	DTS/DPF 35.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 35.3	DTS/DPF 35.3
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.	
PO 35.4	DTS/DPF 35.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 35.5	DTS/DPF 35.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
P0 35.6	DTS/DPF 35.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Water sensitiv	re urban design
PO 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	e urban design DTS/DPF 36.1 None are applicable.
PO 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other	DTS/DPF 36.1
PO 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	DTS/DPF 36.1 None are applicable.
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodati	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable.
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodati	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodations of Stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities ation and Design DTS/DPF 37.1
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodation Siting, Configur Po 37.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities ation and Design DTS/DPF 37.1
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. PO 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodation Siting, Configur PO 37.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities ation and Design DTS/DPF 37.1 None are applicable.
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodation Siting, Configur Po 37.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. Po 37.2 Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities ation and Design DTS/DPF 37.1 None are applicable.
Po 36.1 Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies. Po 36.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems. Supported Accommodation Siting, Configur Po 37.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. Po 37.2 Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	DTS/DPF 36.1 None are applicable. DTS/DPF 36.2 None are applicable. on and retirement facilities ation and Design DTS/DPF 37.1 None are applicable. DTS/DPF 37.2 None are applicable.

Page 61 of 115 Printed on 12/07/2021

movement for residents by providing:	
ground-level access or lifted access to all units level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places	
(c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability	
(d) kerb ramps at pedestrian crossing points.	
Communa	l Open Space
PO 39.1	DTS/DPF 39.1
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.
PO 39.2	DTS/DPF 39.2
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 39.3	DTS/DPF 39.3
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 39.4	DTS/DPF 39.4
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 39.5	DTS/DPF 39.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 39.6	DTS/DPF 39.6
Communal open space is designed and sited to:	None are applicable.
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities	/ Waste Storage
PO 40.1	DTS/DPF 40.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.
P0 40.2	DTS/DPF 40.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 40.3	DTS/DPF 40.3
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 40.4	DTS/DPF 40.4
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.

Page 62 of 115 Printed on 12/07/2021

Policy24 - Enquiry		
PO 40.5	DTS/DPF 40.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 406	DTS/DPF 40.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 40.7	DTS/DPF 40.7	
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.	
Student Acc	commodation	
PO 41.1	DTS/DPF 41.1	
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction. PO 41.2 Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	(a) a range of living options to meet a variety of accommodation needs, such as one-bedroom, two-bedroom and disability access units (b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (v) bicycle parking at the rate of one space for every 2 students. DTS/DPF 41.2 None are applicable.	
	tial development	
	itive Design	
P0 42.1 Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater.	DTS/DPF 42.1 None are applicable.	
PO 42.2	DTS/DPF 42.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	
PO 42.3	DTS/DPF 42.3	
Development includes stormwater management systems to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems.	None are applicable.	
Wash-down and Waste	Loading and Unloading	
P0 43.1	DTS/DPF 43.1	

Page 63 of 115 Printed on 12/07/2021

Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are:

- designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off
- (b) paved with an impervious material to facilitate wastewater collection
- (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area
- (d) are designed to drain wastewater to either:
 - (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme
 - a holding tank and its subsequent removal off-site on a regular basis.

None are applicable.

Laneway Development

Infrastructure and Access

PO 44.1

Development with a primary street comprising a laneway, alley, lane, right of way or similar minor thoroughfare only occurs where:

- (a) existing utility infrastructure and services are capable of accommodating the development
- (b) the primary street can support access by emergency and regular service vehicles (such as waste collection)
- it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

DTS/DPF 44.1

Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site Configuration	Minimum Rate
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which incorporate	Dwellings at ground level:	15m ² / minimum dimension 3m
above ground level dwellings	Dwellings above ground level:	

Page 64 of 115 Printed on 12/07/2021

Stu	tudio (no separate bedroom)	4m ² / minimum dimension 1.8m
On	ne bedroom dwelling	8m ² / minimum dimension 2.1m
Tw	wo bedroom dwelling	11m ² / minimum dimension 2.4m
Th	hree + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

Desired Outcome	
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting	
P0 1.1	DTS/DPF 1.1
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.
P0 1.2	DTS/DPF 1.2
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).
PO 1.3	DTS/DPF 1.3
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.
PO 1.4	DTS/DPF 1.4
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from a reserve gazetted under the National Parks and Wildlife Act 1972 and/or Wilderness Protection Act 1992.
Water Protection	
PO 2.1 Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	DTS/DPF 2.1 None are applicable.
P0 2.2	DTS/DPF 2.2
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	Commercial forestry plantations:

Page 65 of 115 Printed on 12/07/2021

	 (a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).
Fire Man	agement
PO 3.1	DTS/DPF 3.1
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide: (a) 7m or more wide external boundary firebreaks for plantations of
	40ha or less
	(b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha
	(c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.
PO 3.2	DTS/DPF 3.2
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plantation fire management access tracks: (a) are incorporated within all firebreaks
	 (b) are 7m or more wide with a vertical clearance of 4m or more (c) are aligned to provide straight through access at junctions, or if they are a no through access track are appropriately signposted and provide suitable turnaround areas for fire-fighting vehicles (d) partition the plantation into units of 40ha or less in area.
Power-line	Clearances
PO 4.1 Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.	DTS/DPF 4.1 Commercial forestry plantations incorporating trees with an expected mature height of greater than 6m meet the clearance requirements listed in the following table:
	Voltage of transmission line Tower or Pole Minimum horizontal clearance distance between plantings and transmission lines
	500 kV Tower 38m
	275 kV Tower 25m
	132 kV Tower 30m
	132 kV Pole 20m
	66 kV Pole 20m
	Less than 66 kV Pole 20m

Housing Renewal

Assessment Provisions (AP)

Page 66 of 115 Printed on 12/07/2021

Desired Outcome Do 1 Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.

Performance Outcomes (P0) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use	and Intensity
P01.1	DTS/DPF 1.1
Residential development provides a range of housing choices.	Development comprises one or more of the following:
	(a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.
PO 1.2	DTS/DPF 1.2
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.
Buildir	ng Height
PO 2.1	DTS/DPF 2.1
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).
PO 2.2	DTS/DPF 2.2
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.
Primary St	reet Setback
PO 3.1	DTS/DPF 3.1
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.
Secondary S	Street Setback
PO 4.1	DTS/DPF 4.1
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.
Bound	ary Walls
PO 5.1	DTS/DPF 5.1
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):
	(a) adjoin or abut a boundary wall of a building on adjoining land for

Page 67 of 115 Printed on 12/07/2021

the same length and height (b) do not: (i) exceed 3.2m in height from the lower of the natural or finished ground level (ii) exceed 11.5m in length when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary encroach within 3 metres of any other existing or proposed boundary walls on the subject land. PO 5.2 DTS/DPF 5.2 Dwellings in a semi-detached or row arrangement are set back 900mm or Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character. more from side boundaries shared with allotments outside the development site, except for a carport or garage. Side Boundary Setback PO 6.1 DTS/DPF 6.1 Buildings are set back from side boundaries to provide: Other than walls located on a side boundary, buildings are set back from side boundaries: (a) separation between dwellings in a way that contributes to a suburban character at least 900mm where the wall height is up to 3m (b) access to natural light and ventilation for neighbours. (b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m (c) at least 1.9m plus 1/3 of the wall height above 3m for walls facing a southern side boundary. Rear Boundary Setback DTS/DPF 7.1 PO 7.1 Buildings are set back from rear boundaries to provide: Dwellings are set back from the rear boundary: (a) separation between dwellings in a way that contributes to a (a) 3m or more for the first building level suburban character (b) 5m or more for any subsequent building level. (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation. Buildings elevation design PO 8.1 DTS/DPF 8.1 Dwelling elevations facing public streets and common driveways make a Each dwelling includes at least 3 of the following design features within positive contribution to the streetscape and common driveway areas. the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation eaves of a minimum 400mm width extend along the width of the front elevation a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish. PO 8.2 DTS/DPF 8.2 Each dwelling with a frontage to a public street: Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the includes at least one window facing the primary street from a streetscape. habitable room that has a minimum internal room dimension of

Page 68 of 115 Printed on 12/07/2021

Policy24 - Enquiry				
	2.4m (b) has an aggre	gate window area of at le	east 2m ² facing the primary	
P0 8.3	DTS/DPF 8.3			
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.			
P0 8.4	DTS/DPF 8.4			
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.			
PO 8.5	DTS/DPF 8.5			
Entrances to multi-storey buildings are:	None are applicable.			
 (a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure. 				
Outlook a	nd amenity			
PO 9.1	DTS/DPF 9.1			
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outloo towards the street frontage or private open space.			
PO 9.2	DTS/DPF 9.2			
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.			
Private 0	pen Space			
P0 10.1	DTS/DPF 10.1			
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is	provided in accordance	with the following table:	
	Dwelling Type	Dwelling / Site Configuration	Minimum Rate	
	Dwelling (at ground level)		Total area: 24m ² located behind the building line	
			Minimum adjacent to a living room: 16m ² with a minimum dimension 3m	
	Dwelling (above ground level)	Studio	4m ² / minimum dimension 1.8m	
		One bedroom dwelling	8m² / minimum dimension 2.1m	
		Two bedroom dwelling	11m ² / minimum dimension 2.4m	
		Three + bedroom dwelling	15 m ² / minimum dimension 2.6m	
PO 10.2 Private open space positioned to provide convenient access from internal living areas.	DTS/DPF 10.2 At least 50% of the re a habitable room.	quired area of private ope	en space is accessible from	

Page 69 of 115 Printed on 12/07/2021

	+		
PO 10.3	DTS/DPF 10.3		
Private open space is positioned and designed to: (a) provide useable outdoor space that suits the needs of occupants; (b) take advantage of desirable orientation and vistas; and	None are applicable.		
(c) adequately define public and private space.			
Visua	I privacy		
P0 11.1	DTS/DPF 11.1		
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with another residential allotment/site satisfy one of the following: (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more the 200mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface		
	and sited adjacent to any part of the window less than 1.5m above the finished floor.		
P0 11.2	DTS/DPF 11.2		
Development mitigates direct overlooking from upper level balconies and terraces to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases		
Land	scaping		
P0 12.1 Soft landscaping is incorporated into development to: (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration and biodiversity	DTS/DPF 12.1 Residential development incorporates pervious areas for soft landscapin with a minimum dimension of 700mm provided in accordance with (a) an (b): (a) a total area as determined by the following table:		
(d) enhance the appearance of land and streetscapes.	Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m²) Minimum percentage of site		
	Site		
Water Sen	sitive Design		
PO 13.1	DTS/DPF 13.1		
Residential development is designed to capture and use stormwater to:	None are applicable.		
(a) maximise efficient use of water resources			

Page 70 of 115 Printed on 12/07/2021

Policy24 - Enquiry					
(b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, predevelopment conditions.					
PO 14.1	DTS/DPF 14.1				
On-site car parking is provided to meet the anticipated demand of residents, with less on-site parking in areas in close proximity to public transport.	On-site car parking is provided at the following rates per dwelling: (a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.				
PO 14.2	DTS/DPF 14.2				
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.	Residential parking spaces enclosed by fencing, walls or other obstructions with the following internal dimensions (separate from any waste storage area): (a) single parking spaces: (i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m (iii) minimum garage door width of 2.4m per space.				
P0 14.3	DTS/DPF 14.3				
Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.				
PO 14.4	DTS/DPF 14.4				
Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.	Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.				
PO 14.5	DTS/DPF 14.5				
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.				
Oversh	nadowing				
Po 15.1 Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	DTS/DPF 15.1 None are applicable.				
w	aste				
PO 16.1 Provision is made for the convenient storage of waste bins in a location screened from public view.	DTS/DPF 16.1 A waste bin storage area is provided behind the primary building line that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.				

Page 71 of 115 Printed on 12/07/2021

i olioyza - Eliquiiy		
PO 16.2	DTS/DPF 16.2	
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:	None are applicable.	
(a) easily and safely accessible for residents and for collection vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.		
Vehicle	Access	
PO 17.1 Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	DTS/DPF 17.1 None are applicable.	
P0 17.2	DTS/DPF 17.2	
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	
PO 17.3	DTS/DPF 17.3	
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average (b) they are aligned relative to the street so that there is no more the a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.	
PO 17.4	DTS/DPF 17.4	
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	 Where on-street parking is available abutting the site's street frontage, onstreet parking is retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) Minimum car park length of 5.4m where a vehicle can enter or exit a space directly minimum car park length of 6m for an intermediate space located between two other parking spaces. 	
PO 17.5	DTS/DPF 17.5	
Residential driveways that service more than one dwelling of a dimension	Where on-street parking is available abutting the site's street frontage, on-	

Page 72 of 115 Printed on 12/07/2021

Policy24 - Eriquity			
to allow safe and convenient movement. PO 17.6 Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. DTS/DPF 17.6 Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre		
P0 17.7 Dwellings are adequately separated from common driveways and manoeuvring areas.	DTS/DPF 17.7 Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.		
Sto	prage		
PO 18.1	DTS/DPF 18.1		
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:		
	 (a) studio: not less than 6m³ (b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m³ (d) 3+ bedroom dwelling / apartment: not less than 12m³. 		
Earth	nworks		
PO 19.1	DTS/DPF 19.1		
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	The development does not involve: (a) excavation exceeding a vertical height of 1m or (b) filling exceeding a vertical height of 1m or (c) a total combined excavation and filling vertical height exceeding 2m.		
Service connection	ns and infrastructure		
PO 20.1	DTS/DPF 20.1		
Dwellings are provided with appropriate service connections and infrastructure.	The site and building: (a) have the ability to be connected to a permanent potable water supply		
	 (b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011 (c) have the ability to be connected to electricity supply (d) have the ability to be connected to an adequate water supply (an pressure) for fire-fighting purposes (e) would not be contrary to the Regulations prescribed for the purposes of Section 86 of the Electricity Act 1996. 		
Site conf	tamination		
PO 21.1	DTS/DPF 21.1		
Land that is suitable for sensitive land uses to provide a safe environment.	Development satisfies (a), (b), (c) or (d):		
	(a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a		

Page 73 of 115 Printed on 12/07/2021

Policy24 - Enquiry change to a more sensitive use involves a change in the use of land to a more sensitive use on land at which site contamination does not exist (as demonstrated in a site contamination declaration form) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that site contamination does not exist (or no longer exists) at the land the land is suitable for the proposed use or range of uses (without the need for any further remediation) where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development) no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

	Desired Outcome			
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.			

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
General			
P0 1.1	DTS/DPF 1.1		
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.		
Visual Amenity			
PO 2.1	DTS/DPF 2.1		
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities	None are applicable.		

Page 74 of 115 Printed on 12/07/2021

Policy24 - Enquiry	
(excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by:	
(a) utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	
PO 2.2	DTS/DPF 2.2
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.
P0 2.3	DTS/DPF 2.3
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.
Rehab	Ilitation
PO 3.1	DTS/DPF 3.1
Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upon decommissioning of areas used for renewable energy facilities and transmission corridors.	None are applicable.
Hazard M:	anagement
PO 4.1	DTS/DPF 4.1
Infrastructure and renewable energy facilities and ancillary development located and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infrastructure ar	nd Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services: (i) on areas already cleared of native vegetation (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity	

Page 75 of 115 Printed on 12/07/2021

Policy24 - Enquiry			
(b) grouping utility buildings and structures with non-residential development, where practicable.			
P0 5.2	DTS/DPF 5.2		
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.		
P0 5.3	DTS/DPF 5.3		
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.		
Telecommuni	cation Facilities		
P0 6.1	DTS/DPF 6.1		
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.		
P0 6.2	DTS/DPF 6.2		
Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.		
PO 6.3	DTS/DPF 6.3		
Telecommunications facilities, particularly towers/monopoles, are located and sized to mitigate visual impacts by the following methods:	None are applicable.		
(a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose			
or all of the following: (b) using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services (c) using materials and finishes that complement the environment screening using landscaping and vegetation, particularly for equipment shelters and huts.			
Renewable Er	l nergy Facilities		
P0 7.1	DTS/DPF 7.1		
Renewable energy facilities are located as close as practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure.			
Renewable Energy F	Facilities (Wind Farm)		
P0 8.1	DTS/DPF 8.1		
Visual impact of wind turbine generators on the amenity of residential and tourist development is reduced through appropriate separation.	Wind turbine generators are: (a) set back at least 2000m from the base of a turbine to any of the following zones: (i) Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone (iv) Rural Neighbourhood Zone		

Page 76 of 115 Printed on 12/07/2021

	overall (b) set bac associa	turbine height (k at least 1500	measured f m from the	er additional m from the base o base of the tur ellings and tour	bine to non-
PO 8.2	DTS/DPF 8.2				
The visual impact of wind turbine generators on natural landscapes is managed by:	None are applic	able.			
 (a) designing wind turbine generators to be uniform in colour, size and shape (b) coordinating blade rotation and direction (c) mounting wind turbine generators on tubular towers as opposed to lattice towers. 					
PO 8.3	DTS/DPF 8.3				
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applic	able.			
PO 8.4	DTS/DPF 8.4				
Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	No Commonwe applicable.	alth air safety (CASA / ASA	A) or Defence re	equirement is
PO 8.5	DTS/DPF 8.5				
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applicable.				
Renewable Energy F	acilities (Solar Power	r)			
PO 9.1	DTS/DPF 9.1				
Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applic	able.			
PO 9.2	DTS/DPF 9.2				
Ground mounted solar power facilities allow for movement of wildlife by:	None are applic	able.			
(a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.					
PO 9.3	DTS/DPF 9.3				
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria:				
	Generation Capacity	Approximate size of array	Setback from adjoining land boundary	Setback from conservation areas	Setback from Township, Rural Settlement, Rural Neighbourhood and Rural Living Zones ¹
	50MW>	80ha+	30m	500m	2km
	10MW<50MW	16ha-<80ha	25m	500m	1.5km

Page 77 of 115 Printed on 12/07/2021

following:

1 Gloy24 Enquity					
	5MW<10MW	8ha to <16ha	20m	500m	1km
	1MW<5MW	1.6ha to <8ha	15m	500m	500m
	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes:				
	1. Does not app power facility is				nounted solar
PO 9.4	DTS/DPF 9.4				
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applic	able.			
Hydropower / Pumpeo	d Hydropower Faciliti	es			
PO 10.1	DTS/DPF 10.1				
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applicable.				
PO 10.2	DTS/DPF 10.2				
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applicable.				
PO 10.3	DTS/DPF 10.3				
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applic	able.			
Water	Supply				
P0 11.1	DTS/DPF 11.1				
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.				
PO 11.2	DTS/DPF 11.2				
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.		ns water supply nent. Where this	with the ca is not avai	pacity to meet lable it is servic	the requirements ed by a rainwater
		vely for domest ted to the roof		stem of the dw	velling.
Wastewat	er Services				
PO 12.1	DTS/DPF 12.1				
Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the	wastewater dispose of the developm	oosal service w nent. Where this by an on-site wa	ith the capa is not avai	acity to meet th lable it is instea	

Page 78 of 115 Printed on 12/07/2021

with the following:

(a) (b)	it is wholly located and contained within the allotment of the development it will service in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm.	the system is wholly located and contained within the allotment of development it will service; and the system will comply with the requirements of the South Australian Public Health Act 2011.
PO 12.2		DTS/DPF 12.2
maintai	t drainage fields and other wastewater disposal areas are ined to ensure the effective operation of waste systems and se risks to human health and the environment.	Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.
	Temporal	y Facilities
PO 13.1		DTS/DPF 13.1
signific makes	and remote locations, development that is likely to generate ant waste material during construction, including packaging waste, provision for a temporary on-site waste storage enclosure to se the incidence of wind-blown litter.	A waste collection and disposal service is used to dispose of the volume of waste at the rate it is generated.
PO 13.2		DTS/DPF 13.2
Temporary facilities to support the establishment of renewable energy facilities (including borrow pits, concrete batching plants, laydown, storage, access roads and worker amenity areas) are sited and operated to minimise environmental impact.		None are applicable.

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

Desired Outcome		
DO 1	Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
P0 1.1	DTS/DPF 1.1
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.
P01.2	DTS/DPF 1.2
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.

Page 79 of 115 Printed on 12/07/2021

Policy2	4 - Enquiry	
PO 1.3		DTS/DPF 1.3
lagoon constru	ve animal husbandry and associated activities such as wastewater is and liquid/solid waste disposal areas are sited, designed, ucted and managed to not unreasonably impact on sensitive ers in other ownership in terms of noise and air emissions.	None are applicable.
PO 1.4		DTS/DPF 1.4
liquid/s manag	and associated activities such as wastewater lagoons and solid waste disposal areas are sited, designed, constructed and led to not unreasonably impact on sensitive receivers in other ship in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.
PO 1.5		DTS/DPF 1.5
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.		Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.
Wa		aste
PO 2.1		DTS/DPF 2.1
	e of manure, used litter and other wastes (other than waste water s) is sited, designed, constructed and managed to:	None are applicable.
(a) (b) (c)	avoid attracting and harbouring vermin avoid polluting water resources be located outside 1% AEP flood event areas.	
	Soil and Wat	ter Protection
PO 3.1		DTS/DPF 3.1
	id environmental harm and adverse effects on water resources, ve animal husbandry operations are appropriately set back from: public water supply reservoirs major watercourses (third order or higher stream) any other watercourse, bore or well used for domestic or stock	Intensive animal husbandry operations are set back: (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for
(-)	water supplies.	domestic or stock water supplies.
PO 3.2		DTS/DPF 3.2
	ve animal husbandry operations and dairies incorporate oriately designed effluent and run-off facilities that:	None are applicable.
(a)	have sufficient capacity to hold effluent and runoff from the operations on site	
(b)	ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.	

Interface between Land Uses

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 80 of 115 Printed on 12/07/2021

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance Feature General Land Use Compatibility PO 1.1 DTS/DPF 1.1 Sensitive receivers are designed and sited to protect residents and None are applicable. occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone. PO 1.2 DTS/DPF 1.2 Development adjacent to a site containing a sensitive receiver (or lawfully None are applicable. approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts. Hours of Operation PO 2.1 DTS/DPF 2.1 Non-residential development does not unreasonably impact the amenity of Development operating within the following hours: sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for sensitive receivers through its hours of **Class of Development** Hours of operation operation having regard to: (a) the nature of the development Consulting room 7am to 9pm, Monday to Friday (b) measures to mitigate off-site impacts 8am to 5pm, Saturday (c) the extent to which the development is desired in the zone (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without Office 7am to 9pm, Monday to Friday unreasonably compromising the intended use of that land. 8am to 5pm, Saturday Shop, other than any one or 7am to 9pm, Monday to Friday combination of the 8am to 5pm, Saturday and Sunday following: restaurant cellar door in the Productive Rural Landscape Zone, Rural Zone or Rural Horticulture Zone Overshadowing PO 3.1 DTS/DPF 3.1 Overshadowing of habitable room windows of adjacent residential land North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June. a. a neighbourhood-type zone is minimised to maintain access to direct b. other zones is managed to enable access to direct winter sunlight. PO 3.2 DTS/DPF 3.2 Overshadowing of the primary area of private open space or communal Development maintains 2 hours of direct sunlight between 9.00 am and open space of adjacent residential land uses in: 3.00 pm on 21 June to adjacent residential land uses in a neighbourhoodtype zone in accordance with the following: a. a neighbourhood type zone is minimised to maintain access to direct a. for ground level private open space, the smaller of the following: winter sunlight b. other zones is managed to enable access to direct winter sunlight. i. half the existing ground level open space or ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m) b. for ground level communal open space, at least half of the existing

Page 81 of 115 Printed on 12/07/2021

ground level open space.

Policy24 - Eriquily	
PO 3.3	DTS/DPF 3.3
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account:	None are applicable.
 (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed. 	
PO 3.4	DTS/DPF 3.4
Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	None are applicable.
Activities Generatin	g Noise or Vibration
P0 4.1	DTS/DPF 4.1
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.
PO 4.2	DTS/DPF 4.2
Areas for the on-site manoeuvring of service and delivery vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including:	None are applicable.
(a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers	
(b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers	
(c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or	
(d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone.	
PO 4.3	DTS/DPF 4.3
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully	The pump and/or filtration system ancillary to a dwelling erected on the same site is: (a) enclosed in a solid acoustic structure located at least 5m from
approved sensitive receivers).	enclosed in a solid acoustic structure located at least 5m from the nearest habitable room located on an adjoining allotment or located at least 12m from the nearest habitable room located on an adjoining allotment.
PO 4.4	DTS/DPF 4.4
External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment.	Adjacent land is used for residential purposes.
PO 4.5	DTS/DPF 4.5
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.
PO 4.6	DTS/DPF 4.6
	1

Page 82 of 115 Printed on 12/07/2021

	1	
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to	Development incorporating n that will achieve the following	nusic includes noise attenuation measures y noise levels:
accommodate sensitive receivers.	Assessment location	Music noise level
	Externally at the nearest existing or envisaged noise sensitive location	Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)
Air C	IL Quality	
P0 5.1	DTS/DPF 5.1	
Development with the potential to emit harmful or nuisance-generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	None are applicable.	
P0 5.2	DTS/DPF 5.2	
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	None are applicable.	
 (a) incorporating appropriate treatment technology before exhaust emissions are released (b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers. 		
Ligh	t Spill	
P0 6.1	DTS/DPF 6.1	
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
PO 6.2	DTS/DPF 6.2	
External lighting is not hazardous to motorists and cyclists.	None are applicable.	
Solar Reflec	ctivity / Glare	
P07.1	DTS/DPF 7.1	
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.	
Electrical	nterference	
P0 8.1	DTS/DPF 8.1	
Development in rural and remote areas does not unreasonably diminish or result in the loss of existing communication services due to electrical interference.	level or (b) is not within a line of receiver (antenna) ot	m in height, measured from existing ground sight between a fixed transmitter and fixed her than where an alternative service is ent fixed transmitter or cable.
Interface with	Rural Activities	
PO 9.1	DTS/DPF 9.1	
. 🔾 200	3.3/5/1 5.1	

Page 83 of 115 Printed on 12/07/2021

Folicy24 - Eliquily		
Sensitive receivers are located and designed to mitigate impacts from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.2	DTS/DPF 9.2	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing land-based aquaculture activities and do not prejudice the continued operation of these activities.	Sensitive receivers are located at least 200m from the boundary of a site used for land-based aquaculture and associated components in other ownership.	
PO 9.4	DTS/DPF 9.4	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing dairies including associated wastewater lagoons and liquid/solid waste storage and disposal facilities and do not prejudice the continued operation of these activities.	Sensitive receivers are sited at least 500m from the boundary of a site used for a dairy and associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities in other ownership.	
PO 9.5	DTS/DPF 9.5	
Sensitive receivers are located and designed to mitigate the potential impacts from lawfully existing facilities used for the handling, transportation and storage of bulk commodities (recognising the potential for extended hours of operation) and do not prejudice the continued operation of these activities.	Sensitive receivers are located away from the boundary of a site used for the handling, transportation and/or storage of bulk commodities in other ownership in accordance with the following: (a) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility (b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
PO 9.6	DTS/DPF 9.6	
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.	
PO 9.7	DTS/DPF 9.7	
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.	
Interface with Mines and Qua	rries (Rural and Remote Areas)	
PO 10.1	DTS/DPF 10.1	
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971</i> .	

Land Division

Page 84 of 115 Printed on 12/07/2021

Assessment Provisions (AP)

Desired Outcome		
DO 1	Land division:	
	 (a) creates allotments with the appropriate dimensions and shape for their intended use (b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure (c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features (d) facilitates solar access through allotment orientation (e) creates a compact urban form that supports active travel, walkability and the use of public transport (f) avoids areas of high natural hazard risk. 	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All land division		
Allotment	configuration	
PO 1.1	DTS/DPF 1.1	
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b):	
	(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.	
P0 1.2	DTS/DPF 1.2	
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.	
Design a	and Layout	
PO 2.1	DTS/DPF 2.1	
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.	
P0 2.3	DTS/DPF 2.3	
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.	
PO 2.4	DTS/DPF 2.4	
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.	
PO 2.5	DTS/DPF 2.5	
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.	

Page 85 of 115 Printed on 12/07/2021

PO 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.
PO 2.7	DTS/DPF 2.7
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.
P0 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads ar	d Access
PO 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
P0 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
P0 3.3	DTS/DPF 3.3
Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
PO 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
PO 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
P0 3.11	DTS/DPF 3.11
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
Infrast	ructure

Page 86 of 115 Printed on 12/07/2021

PO 4.1	DTS/DPF 4.1
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
P0 4.2	DTS/DPF 4.2
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment or (b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
PO 4.4	DTS/DPF 4.4
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.
PO 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	(Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.
Solar O	rientation
PO 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sens	sitive Design
P0 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
P0 7.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.

Page 87 of 115 Printed on 12/07/2021

Battle-Axe Development		
PO 8.1	DTS/DPF 8.1	
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.	
PO 8.2	DTS/DPF 8.2	
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:	
	(a) has a minimum width of 4m or	
	(b) where more than 3 allotments are proposed, a minimum width of 5.5m.	
P0 8.3	DTS/DPF 8.3	
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.	
PO 8.4	DTS/DPF 8.4	
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater	Battle-axe or common driveways satisfy (a) and (b):	
management.	(a) are constructed of a minimum of 50% permeable or porous material	
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Major Land Divisio	on (20+ Allotments)	
Open	Space	
P0 9.1	DTS/DPF 9.1	
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.	
P0 9.2	DTS/DPF 9.2	
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.	
Water Sens	itive Design	
PO 10.1	DTS/DPF 10.1	
Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.2	DTS/DPF 10.2	
Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.3	DTS/DPF 10.3	
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other	None are applicable.	

Page 88 of 115 Printed on 12/07/2021

contaminants to the stormwater system, watercourses or other water bodies.	
Solar Or	ientation
P0 11.1	DTS/DPF 11.1
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.

Marinas and On-Water Structures

Assessment Provisions (AP)

	Desired Outcome
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
P0 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the	On-water structures are set back:
operation or function of a water supply pumping station.	(a) 3km or more from upstream water supply pumping station take- off points (b) 500m or more from downstream water supply pumping station take-off points.
P0 1.6	DTS/DPF 1.6
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmental Protection	

Page 89 of 115 Printed on 12/07/2021

P0 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.
Chorunge.	

Open Space and Recreation

Assessment Provisions (AP)

	Desired Outcome
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Recreation facilities are compatible with surrounding land uses and activities. Pol 12 Open space areas include natural or landscaped areas using locally indigenous plant species and large trees. Design and Siting Pol 21 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. Pol 22 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. Pol 23 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists Pedestrians and Cyclists Pol 3.1 DTS/DPF 3.1	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Recreation facilities are compatible with surrounding land uses and activities. PO 12 Open space areas include natural or landscaped areas using locally indigenous plant species and large trees. Design and Siting PO 2.1 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. PO 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DTS/OPF 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DTS/OPF 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists PO 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Land Use :	and Intensity
Appendix properties and large trees. Design and Siting DIS/OPF 2.1 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. PO 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DIS/OPF 2.3 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. PO 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists PO3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	P0 1.1	DTS/DPF 1.1
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees. Design and Siting DTS/DPF 2.1 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. DTS/DPF 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DTS/DPF 2.2 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. DTS/DPF 2.3 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 3.1 Open space and recreation facilities. Pedestrians and Cyclists Po 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
Design and Siting Design and Siting DTS/DPF 2.1 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. PO 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists Pedestrians and Cyclists Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	PO 1.2	DTS/DPF 1.2
P0 2.1 Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. P0 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. P0 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. DTS/DPF 2.3 None are applicable. P0 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. DTS/DPF 2.3 None are applicable. Pedestrians and Cyclists P0 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility. DTS/DPF 2.2 Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DTS/DPF 2.3 DTS/DPF 2.3 DTS/DPF 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists Pedestrians and Cyclists DTS/DPF 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Design	and Siting
Open space and recreation facilities incorporate park furniture, shaded areas and resting places. PO 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. DTS/DPF 2.3 None are applicable. Po 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	PO 2.1	DTS/DPF 2.1
Open space and recreation facilities incorporate park furniture, shaded areas and resting places. DTS/DPF 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists PO 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
DTS/DPF 2.3 Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists Pedestrians and Cyclists DTS/DPF 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	PO 2.2	DTS/DPF 2.2
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities. Pedestrians and Cyclists Pogen space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
Pedestrians and Cyclists PO 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	PO 2.3	DTS/DPF 2.3
DTS/DPF 3.1 Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Open space incorporates: (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Pedestrians	s and Cyclists
(a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	PO 3.1	DTS/DPF 3.1
schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points.	Open space incorporates:	None are applicable.
network; (c) easily identified access points.	poulous and of one minages to out or open opensor,	
(c) easily identified access points.	to are drooming points where peacethan routes interesed the road	
Usability	l	
	Usi	ability

Page 90 of 115 Printed on 12/07/2021

Policy24 - Eriquily	
PO 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and	None are applicable.
passive recreational use taking into consideration its gradient and	
potential for inundation.	
Safety an	d Security
PO 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development	None are applicable.
to provide casual surveillance where possible.	
' '	
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive	None are applicable.
surveillance.	Trone are applicable.
PO 5.3	DTS/DPF 5.3
Landaganing provided in open appeal and regression facilities maximises	None are applicable.
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
opportunities for casual surveillance throughout the park.	
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to	None are applicable.
minimise potential entrapment.	
PO 5.5	DTS/DPF 5.5
	D10/D11 0.0
Adequate lighting is provided around toilets, telephones, seating, litter	None are applicable.
bins, bicycle storage, car parks and other such facilities.	
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly	None are applicable.
defined, adequately lit routes with observable entries and exits.	
Sign	nage
P0 6.1	DTS/DPF 6.1
P0 6.1	DTS/DPF 6.1
PO 6.1 Signage is provided at entrances to and within the open space and	
P0 6.1	DTS/DPF 6.1
PO 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest	DTS/DPF 6.1
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park	DTS/DPF 6.1
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	DTS/DPF 6.1
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	DTS/DPF 6.1 None are applicable.
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar P0 7.1 Buildings and car parking areas in open space areas are designed, located	DTS/DPF 6.1 None are applicable. d Structures
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar P0 7.1 Buildings and car parking areas in open space areas are designed, located	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar P0 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. P0 7.2 Buildings and structures in open space areas are clustered where practical	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable.
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable.
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable.
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable.
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings ar Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4 None are applicable.
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4 None are applicable.
P0 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are P0 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. P0 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. P0 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. P0 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve. Lands	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4 None are applicable. caping DTS/DPF 8.1
Po 6.1 Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like. Buildings are Po 7.1 Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive. Po 7.2 Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open. Po 7.3 Development in open space is constructed to minimise the extent of impervious surfaces. Po 7.4 Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve. Lands	DTS/DPF 6.1 None are applicable. d Structures DTS/DPF 7.1 None are applicable. DTS/DPF 7.2 None are applicable. DTS/DPF 7.3 None are applicable. DTS/DPF 7.4 None are applicable.

Page 91 of 115 Printed on 12/07/2021

PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.
along cyclist and pedestrian routes; around picnic and barbecue areas; in car parking areas.	
PO 8.3	DTS/DPF 8.3
Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	None are applicable.
PO 8.4	DTS/DPF 8.4
Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	None are applicable.

Out of Activity Centre Development

Assessment Provisions (AP)

Desired Outcome		
DO1	DO1 The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a	
	range of shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1 Non-residential development outside Activity Centres of a scale and type that does not diminish the role of Activity Centres: (a) as primary locations for shopping, administrative, cultural, entertainment and community services (b) as a focus for regular social and business gatherings (c) in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	DTS/DPF 1.1 None are applicable.
Out-of-activity centre non-residential development complements Activity Centres through the provision of services and facilities: (a) that support the needs of local residents and workers, particularly in underserviced locations (b) at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	DTS/DPF 1.2 None are applicable.

Resource Extraction

Assessment Provisions (AP)

Desired Outcome

Page 92 of 115 Printed on 12/07/2021

DO 1

Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	
PO 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
P0 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.
Water	Quality
PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
P0 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Site Contamination

Assessment Provisions (AP)

Desired Outcome		
DO 1	Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d): (a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form)

Page 93 of 115 Printed on 12/07/2021

1 olloy24 Enquiry	
	(d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that-
	A. site contamination does not exist (or no longer exists) at the land or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
	and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

Desired Outcome		
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ge	neral
P0 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where: (a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature.	None are applicable.
Po 1.2 Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	DTS/DPF 1.2 None are applicable.

Page 94 of 115 Printed on 12/07/2021

Policy24 - Enquiry		
Caravan and Tourist Parks		
P0 2.1	DTS/DPF 2.1	
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.	
P0 2.2	DTS/DPF 2.2	
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.	
P0 2.3	DTS/DPF 2.3	
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.	
P0 2.4	DTS/DPF 2.4	
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.	
PO 2.5	DTS/DPF 2.5	
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.	
PO 2.6	DTS/DPF 2.6	
Long-term occupation does not displace tourist accommodation, particularly in important tourist destinations such as coastal and riverine locations.	None are applicable.	
Tourist accommodation in areas constituted u	under the National Parks and Wildlife Act 1972	
PO 3.1	DTS/DPF 3.1	
Tourist accommodation avoids delicate or environmentally sensitive areas such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	None are applicable.	
P0 3.2	DTS/DPF 3.2	
Tourist accommodation is sited and designed in a manner that is subservient to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.	
P0 3.3	DTS/DPF 3.3	
Tourist accommodation and recreational facilities, including associated access ways and ancillary structures, are located on cleared (other than where cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.	
 (a) comprising a minimum of 10 accommodation units (b) clustering separated individual accommodation units (c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling. 		

Transport, Access and Parking

Page 95 of 115 Printed on 12/07/2021

Assessment Provisions (AP)

Desired Outcome	
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Movement Systems		
PO 1.1	DTS/DPF 1.1	
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.	
P01.3	DTS/DPF 1.3	
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.	
P01.4	DTS/DPF 1.4	
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.	
Sigh	tlines	
P0 2.1	DTS/DPF 2.1	
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.	
P0 2.2	DTS/DPF 2.2	
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.	
Vehicle Access		
PO 3.1	DTS/DPF 3.1	
Safe and convenient access minimises impact or interruption on the operation of public roads.	The access is: (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.	
P0 3.2	DTS/DPF 3.2	

Page 96 of 115 Printed on 12/07/2021

None are applicable.
DTS/DPF 3.3
None are applicable.
DTS/DPF 3.4
None are applicable.
DTS/DPF 3.5
Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
DTS/DPF 3.6
Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.
DTS/DPF 3.7
Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.
DTS/DPF 3.8
None are applicable.
DTS/DPF 3.9
None are applicable.

Page 97 of 115 Printed on 12/07/2021

ptking Rates DTS/DPF 4.1 None are applicable. DTS/DPF 5.1 Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
none are applicable. DTS/DPF 5.1 Development provides a number of car parking spaces on-site at a rate not less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
DTS/DPF 5.1 Development provides a number of car parking spaces on-site at a rate not less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Development provides a number of car parking spaces on-site at a rate not less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Development provides a number of car parking spaces on-site at a rate not less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
(c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
rking Areas
DTS/DPF 6.1 Movement between vehicle parking areas within the site can occur withou the need to use a public road.
DTS/DPF 6.2 None are applicable.
DTS/DPF 6.3
None are applicable.
DTS/DPF 6.4
None are applicable.
DTS/DPF 6.5
None are applicable.
DTS/DPF 6.6
Loading areas and designated parking spaces are wholly located within the site.
DTS/DPF 6.7
None are applicable.
araging and Parking of Vehicles
DTS/DPF 7.1
None are applicable.

Page 98 of 115 Printed on 12/07/2021

lential Parks and Caravan and Tourist Parks
DTS/DPF 8.1 None are applicable.
DTS/DPF 8.2
None are applicable.
n Designated Areas
DTS/DPF 9.1
Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.
DTS/DPF 9.2
None are applicable.
DTS/DPF 9.3
None are applicable.
Cut-Offs
DTS/DPF 10.1 Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram: Corner Cut-Off Area Allotment Boundary
r

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards) Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space
Detached Dwelling	per dwelling. Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1

Page 99 of 115 Printed on 12/07/2021

, ,	
	space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Supported accommodation	0.3 spaces per bed.
Residential Development (Other)	
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Student accommodation	0.3 spaces per bed.
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
Tourist	
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.

Page 100 of 115 Printed on 12/07/2021

	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
Tourist accommodation	1 car parking space per accommodation unit / guest room.
Commercial Uses	
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.
Automotive collision repair	3 spaces per service bay.
Call centre	8 spaces per 100m ² of gross leasable floor area.
Motor repair station	3 spaces per service bay.
Office	4 spaces per 100m ² of gross leasable floor area.
Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area
	1 space per 100m ² of outdoor area used for display purposes.
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community and Civic Uses	
Childcare centre	0.25 spaces per child
Library	4 spaces per 100m ² of total floor area.
Community facility	10 spaces per 100m ² of total floor area.
Hall / meeting hall	0.2 spaces per seat.
Place of worship	1 space for every 3 visitor seats.

Page 101 of 115 Printed on 12/07/2021

Policy24 - Eriquiry	
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
Health Related Uses	
Hospital	4.5 spaces per bed for a public hospital.
	1.5 spaces per bed for a private hospital.
Consulting room	4 spaces per consulting room excluding ancillary facilities.
Recreational and Entertainment Uses	
Cinema complex	0.2 spaces per seat.
Concert hall / theatre	0.2 spaces per seat.
Hotel	1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.
Indoor recreation facility	6.5 spaces per 100m ² of total floor area for a Fitness Centre
	4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.
Industry/Employment Uses	
Fuel depot	1.5 spaces per 100m ² total floor area
	1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.
Industry	1.5 spaces per 100m ² of total floor area.
Store	$0.5\mathrm{spaces}\mathrm{per}\mathrm{100m^2}\mathrm{of}\mathrm{total}\mathrm{floor}\mathrm{area}.$
Timber yard	1.5 spaces per 100m ² of total floor area
	1 space per $100 \mathrm{m}^2$ of outdoor area used for display purposes.
Warehouse	0.5 spaces per 100m ² total floor area.
Other Uses	
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station	5 spaces per 100m ² of total building floor area.

Page 102 of 115 Printed on 12/07/2021

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria)
 - 0
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally		<u>'</u>	
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multistorey building: 1 visitor space for each 6 dwellings.	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
Non-residential developmer	nt		
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	6 spaces per 100m ² of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone

Page 103 of 115 Printed on 12/07/2021

			Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential development			
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following:	(a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham
 (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service⁽²⁾ (b) is within 400 metres of a bus interchange⁽¹⁾ (c) is within 400 metres of an O-Bahn 	(c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone

Page 104 of 115 Printed on 12/07/2021

	interchange ⁽¹⁾	(g)	Urban Neighbourhood Zone
(d)	is within 400 metres of a passenger rail station ⁽¹⁾		
(e)	is within 400 metres of a passenger tram station ⁽¹⁾		
(f)	is within 400 metres of the Adelaide Parklands.		

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Class of Development	Bicycle Parking Rate Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Educational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
Licensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m ² of gross leasable floor area plus 2 spaces plus 1 space per 1000m ² of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
Shop	1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.
Schedule to Table 3	

Page 105 of 115 Printed on 12/07/2021

Designated Area	Relevant part of the State The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide
Strategic Innovation Zone	
Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	
Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Waste Treatment and Management Facilities

Assessment Provisions (AP)

Desired Outcome	
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Siting		
P0 1.1	DTS/DPF 1.1	
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate offsite impacts from noise, air and dust emissions.	None are applicable.	
Soil and Wa	ter Protection	
PO 2.1	DTS/DPF 2.1	
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as:	None are applicable.	
(a) containing potential groundwater and surface water		

Page 106 of 115 Printed on 12/07/2021

Policy24 - Eriquity		
contaminants within waste operations areas		
(b) diverting clean stormwater away from waste operations areas		
and potentially contaminated areas (c) providing a leachate barrier between waste operations areas and		
underlying soil and groundwater.		
PO 2.2	DTS/DPF 2.2	
Wastewater lagoons are set back from watercourses to minimise	Wastewater lagoons are set back 50m or more from watercourse banks.	
environmental harm and adverse effects on water resources.		
PO 2.3	DTS/DPF 2.3	
Wastewater lagoons are designed and sited to:	None are applicable.	
(a) avoid intersecting underground waters;		
(b) avoid inundation by flood waters;		
(c) ensure lagoon contents do not overflow;		
(d) include a liner designed to prevent leakage.		
PO 2.4	DTS/DPF 2.4	
Waste operations areas of landfills and organic waste processing facilities		
are set back from watercourses to minimise adverse impacts on water	banks.	
resources.		
Am	enity	
PO 3.1	DTS/DPF 3.1	
Waste treatment and management facilities are screened, located and	None are applicable.	
designed to minimise adverse visual impacts on amenity.		
PO 3.2	DTS/DPF 3.2	
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.	
PO 3.3	DTS/DPF 3.3	
Litter control measures minimise the incidence of windblown litter.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Waste treatment and management facilities are designed to minimise	None are applicable.	
adverse impacts on both the site and surrounding areas from weed and		
vermin infestation.		
Acc	eess	
PO 4.1	DTS/DPF 4.1	
Traffic circulation movements within any waste treatment or management	None are applicable.	
site are designed to enable vehicles to enter and exit the site in a forward direction.		
	DTO/DDF 4.0	
P0 4.2	DTS/DPF 4.2	
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.	
Fencing a	nd Security	
PO 5.1	DTS/DPF 5.1	
Security fencing provided around waste treatment and management	Chain wire mesh or pre-coated painted metal fencing 2m or more in height	
facilities prevents unauthorised access to operations and potential hazard	is erected along the perimeter of the waste treatment or waste	
to the public.	management facility site.	
Landfill		
PO 6.1	DTS/DPF 6.1	

Page 107 of 115 Printed on 12/07/2021

Policy24 - Enquiry

Policy24 - Enquiry	
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.
P0 6.2	DTS/DPF 6.2
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.
P0 6.3	DTS/DPF 6.3
Landfill facilities are located on land that is not subject to land slip.	None are applicable.
PO 6.4	DTS/DPF 6.4
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Organic Waste Pr	ocessing Facilities
P0 7.1	DTS/DPF 7.1
Organic waste processing facilities are separated from the coast to avoid potential environment harm.	Organic waste processing facilities are set back 500m or more from the coastal high water mark.
P0 7.2	DTS/DPF 7.2
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.
P0 7.3	DTS/DPF 7.3
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.
P0 7.4	DTS/DPF 7.4
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.
P0 7.5	DTS/DPF 7.5
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Major Wastewater	Treatment Facilities
PO 8.1	DTS/DPF 8.1
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.
PO 8.2	DTS/DPF 8.2
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.

Workers' accommodation and Settlements

Assessment Provisions (AP)

Desired Outcome	
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental
	and social impacts.

Page 108 of 115 Printed on 12/07/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
P0 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
P0 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
P0 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 109 of 115 Printed on 12/07/2021

Page 110 of 115 Printed on 12/07/2021

Page 111 of 115 Printed on 12/07/2021

Page 112 of 115 Printed on 12/07/2021

Page 113 of 115 Printed on 12/07/2021

Page 114 of 115 Printed on 12/07/2021

Page 115 of 115 Printed on 12/07/2021